date: 23/10/2026

RONDA+ LED 1X

Part number 3100084

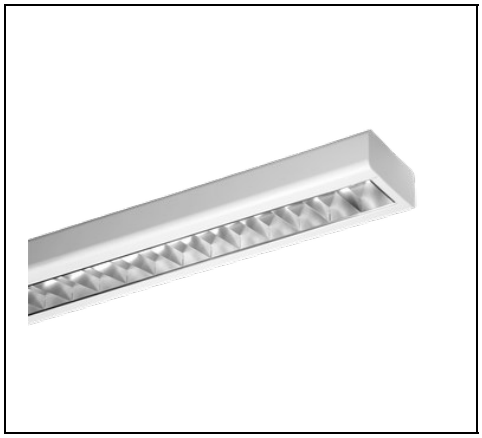

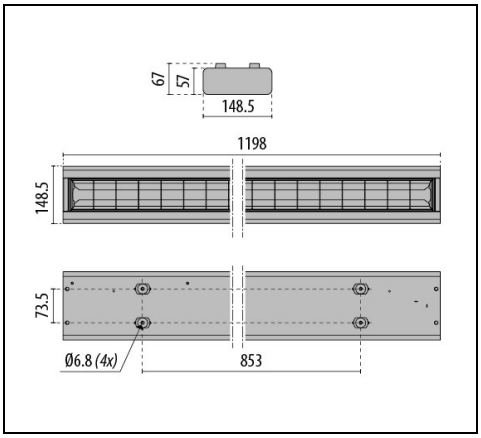

IP 20 CLASS I CE UK CA

Description

Ceiling mounted LED luminaire with satin louvre, suitable for lighting offices, conference rooms and commercial complexes, comprising:

- Polyester powder coat finish steel sheet housing
- Satin aluminium louvre attached by four concealed spring fixings
- Louvre remains attached to the housing during lamp replacement
- Built-in driver

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com

Product data

ETIM Group:	EG000027	**ETIM Class:**	EC002892

General information

Lampholder:	LED	**Light source:**	LED
Luminaire lumen output [lm]:	1900	**Luminaire wattage [W]:**	19 W
Luminous efficacy [lm/W]:	100	**CRI:**	80
Colour temperature [K]:	4000	**Colour / Finishing:**	WH-87 / White / Textured
IP degree of protection:	IP20	**Impact resistance / impact energy:**	IK07 2J xx5
Protection class:	I	**Optic:**	S/W - Symmetric Wide
Net weight [kg]:	2.499	**Overall length [mm]:**	1198
Overall width [mm]:	149	**Overall height [mm]:**	57

Mechanical features

Shape:	Rectangular	**Housing material:**	Aluminium
Diffuser material:	Transparent plastic		

Electrical features

Voltage type:	AC	**Input voltage [V AC]:**	220/240
Input frequency [Hz]:	50/60	**Power factor / COS Φ:**	>0.9
Inrush current [A/µs]:	25 / 250	**C10 1.5 mm²:**	27
C16 2.5 mm²:	45	**B10 1.5 mm²:**	16
B16 2.5 mm²:	27		

Installation

Application area:	Indoor lighting	**Mounting type:**	Wall and ceiling surface
Min. ambient temperature [°C]:	0		

Light features

MacAdam:	5	**Lumen maintenance:**	L80B10@50000h
Distribution of light emission:	Direct	**DFF - Downward Flux Fraction [%]:**	100
UFF - Upward Flux Fraction [%]:	0	**UGR max.:**	18.8

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com

Photometric data

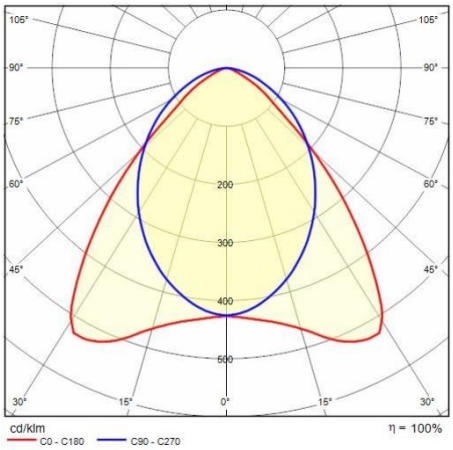

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com