
N-Module-Set

AK3 1/6/1 N



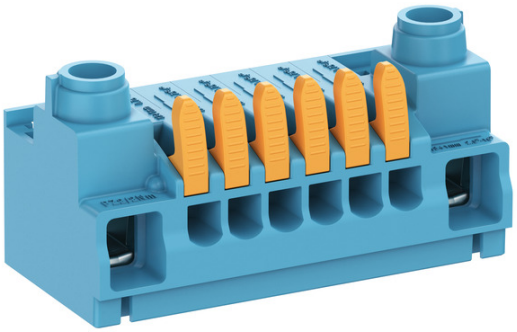

AK3 1/6/1 N

N-Module-Set

Productnumber: 73385201

N-modules with actuation lever for tool-free release of conductors, each with 2 screw terminals 2.5-16 mm² and 6 push-in terminals 0.75-4 mm² for mounting on mounting bases for AK 14-70 distributors (AK3 3/14 PE or AK3 6/21 PE) and the mounting bases for AK Kompakt 24 and 36 distributors (AK 3/14 PE or AK 6/21 PE).

4 N-modules each with 2 screw terminals 2.5-16 mm² and 6 push-in terminals 0.75-4mm² with operating lever for toolless releasing of the conductors for mounting on AK3 3/14 PE or AK3 6/21 PE base carrier, 3 bridges

Technical Data

electrical characteristics

Rated operating voltage AC:	690 V
Rated current:	76 A
Number of poles:	1
shockproof:	Yes
Connection 1: Connection type:	Screws
Connection 1: Strip length:	13 mm
Connection 1: Clamping points per pole:	2
Connection 1: Suitable for Cu conductors:	1
Connection 1: Suitable for Al conductors:	1
Connection 1: Connectable conductor cross-section, fine-wire without ferrule (min):	2.5 mm²
Connection 1: Connectable conductor cross-section, fine-wire without ferrule (max):	16 mm²
Connection 1: Connectable conductor cross-section, fine-wire with ferrule (min):	2.5 mm²
Connection 1: Connectable conductor cross-section, fine-wire with ferrule (max):	16 mm²
Connection 1: Connectable conductor cross-section, single-wire (min):	2.5 mm²
Connection 1: Connectable conductor cross-section, single-wire (max):	16 mm²
Connection 1: Connectable conductor cross-section, stranded (min):	2.5 mm²
Connection 1:Connectable conductor cross-section, stranded (max):	16 mm²
Connection 2: Connection type:	Screwless
Connection 2: Stripping length:	12 mm
Connection 2: Clamping points per pole:	6
Connection 2: Suitable for Cu conductors:	1
Connection 2: Suitable for Al conductors:	1
Connection 2: Connectable conductor cross-section, fine-wire without ferrule (min):	0.75 mm²

electrical characteristics

Connection 2: Connectable conductor cross-section, fine-wire without ferrule (max):	4 mm²
Connection 2: Connectable conductor cross-section, fine-wire with ferrule (min):	0.75 mm²
Connection 2: Connectable conductor cross-section, fine-wire with ferrule (max):	2.5 mm²
Connection 2: Connectable conductor cross-section, single-wire (min):	0.75 mm²
Connection 2: Connectable conductor cross-section, single-wire (max):	4 mm²

Dimensions

Weight:	0.143 kg

mechanical properties

Connection 1: Tightening moment:	2 Nm

Sales Information

EAN:	4013902684472
ETIM Class:	EC001284
Custom tariff number:	85369010
Minimum order quantity:	1

Certificates

Test mark:	VDE