

**SAI-4-M 8P M12 UT****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Similar to illustration**

M12 distributors are available in various versions. The 4, 6 or 8 M12 slots are in 4 or 5 pole design. The group outlet is designed as a fixed cable version, hood version for connection by the user, or with M23. Special versions are also available. For instance, there are 1-to-1 distributors for use with any connection types, or distributors approved for Ex Zone 1.

**General ordering data**

|            |                                                                                                    |
|------------|----------------------------------------------------------------------------------------------------|
| Version    | Hood distributor lower part, M12, 30 V, A-coded, LED: Yes, LED initiator: Yes, Wiring type: Custom |
| Order No.  | <a href="#">1807641000</a>                                                                         |
| Type       | SAI-4-M 8P M12 UT                                                                                  |
| GTIN (EAN) | 4032248279043                                                                                      |
| Qty.       | 2 pc(s).                                                                                           |

## SAI-4-M 8P M12 UT

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

|            |       |
|------------|-------|
| Net weight | 123 g |
|------------|-------|

## Temperatures

|                       |            |
|-----------------------|------------|
| Operating temperature | -20 - 90°C |
|-----------------------|------------|

## Connection data

|                            |                             |                      |                      |
|----------------------------|-----------------------------|----------------------|----------------------|
| Sheathing stripping length | 100 mm                      | Clamping range, min. | 0.08 mm <sup>2</sup> |
| Clamping range, max.       | 1.5 mm <sup>2</sup>         | Storage space        | Standard             |
| Distributor outlet         | Hood distributor lower part |                      |                      |

## Electrical data

|                                |      |                                         |                   |
|--------------------------------|------|-----------------------------------------|-------------------|
| Rated voltage, min.            | 10 V | Rated voltage, max.                     | 30 V              |
| Test voltage                   | 1 kV | Max. current-carrying capacity per slot | 4 A               |
| Total current                  | 10 A | Current per signal                      | 2 A               |
| Electrical isolation available | No   | Insulation strength                     | 10 <sup>9</sup> Ω |

## General technical data

|                                     |         |                             |       |
|-------------------------------------|---------|-----------------------------|-------|
| Plug-in station coding              | A-coded | Protection degree           | IP68  |
| Number of poles                     | 8       | Number of contact sockets   | 4     |
| Connection thread                   | M12     | Pollution severity          | 3     |
| Fire behaviour                      | V-0     | Plugging cycles             | ≤ 50  |
| LED                                 | Yes     | LED initiator               | Yes   |
| LED colour for indicating operation | green   | LED colour for I/O function | green |

## Material data

|                       |                    |                          |                |
|-----------------------|--------------------|--------------------------|----------------|
| Housing main material | Pocan              | Material of distributor  | Plastic        |
| Housing colour        | grey, RAL 7032     | Hood sealing material    | Viton          |
| Screw socket          | Nickel-plated CuZn | Contact material         | CuZn           |
| Contact surface       | Gold-plated        | Contact carrier material | PBT (UL 94 V0) |

## Technical data cable

|                 |   |                             |    |
|-----------------|---|-----------------------------|----|
| Number of poles | 8 | Suitable for cable carriers | No |
|-----------------|---|-----------------------------|----|

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC002585    | ETIM 7.0    | EC003558    |
| ETIM 8.0    | EC003558    | ETIM 9.0    | EC003558    |
| ETIM 10.0   | EC003558    | ECLASS 9.0  | 27-44-01-08 |
| ECLASS 9.1  | 27-44-01-08 | ECLASS 10.0 | 27-44-01-11 |
| ECLASS 11.0 | 27-44-01-11 | ECLASS 12.0 | 27-44-01-11 |
| ECLASS 13.0 | 27-44-01-11 | ECLASS 14.0 | 27-44-01-11 |
| ECLASS 15.0 | 27-44-01-11 |             |             |

## Environmental Product Compliance

|                        |                             |
|------------------------|-----------------------------|
| RoHS Compliance Status | Compliant without exemption |
| REACH SVHC             | No SVHC above 0.1 wt%       |

**SAI-4-M 8P M12 UT****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Technical data****Approvals**

Approvals



|                         |                                                                                                                                                                             |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Approvals MAMID         | <a href="https://mdcop.weidmueller.com/mediadelivery/rendition/900_319230/-T1z1mm-S800/">https://mdcop.weidmueller.com/mediadelivery/rendition/900_319230/-T1z1mm-S800/</a> |
| ROHS                    | Conform                                                                                                                                                                     |
| UL File Number Search   | UL Website                                                                                                                                                                  |
| Certificate No. (cURus) | E141197                                                                                                                                                                     |

**Downloads**

|            |                                                                        |
|------------|------------------------------------------------------------------------|
| Catalogues | <a href="#">Catalogues in PDF-format</a>                               |
| Brochures  | <a href="#">FL FIELDWIRING EN</a><br><a href="#">FL FIELDWIRING EN</a> |


## SAI-4-M 8P M12 UT

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany


[www.weidmueller.com](http://www.weidmueller.com)

# Drawings


## Similar to illustration

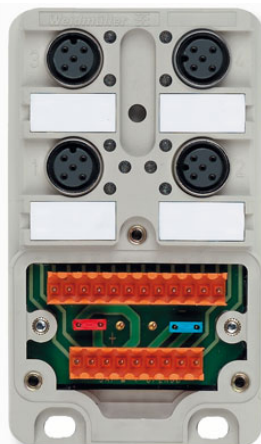

## Dimensioned drawing

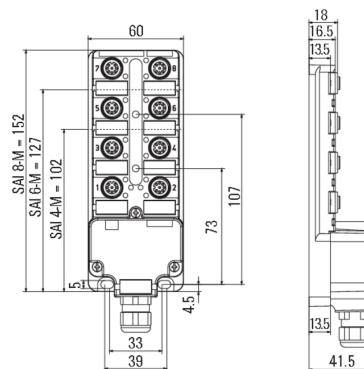

## Wiring diagram

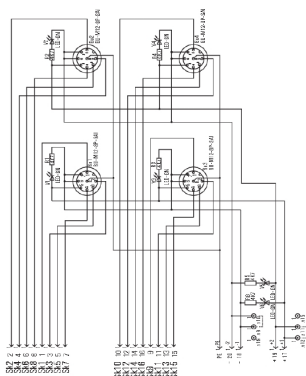

## SAI-4-M 8P M12 UT

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## Blank



ESG is the tried-and-tested marker in MultiCard format for use on many well-known electrical devices. The result is high-quality device marking with a high-contrast appearance.

Various types are available for devices from manufacturers like Siemens, ABB, Beckhoff etc.

Advantages at a glance:

- Tags for universal usage, self-adhesive or clip-on tags, depending on type
- For aligned equipment, e.g. circuit breakers, we supply ESG markers for clipping onto tag rails
- Individual laser-quality printing according to specifications

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

| Type       | ESG 9/20 MC NE WS          | Version                                                      |  |
|------------|----------------------------|--------------------------------------------------------------|--|
| Order No.  | <a href="#">1609940000</a> | ESG, Device markers x 20 mm, PA 66, Colour: white, pluggable |  |
| GTIN (EAN) | 4008190203528              |                                                              |  |
| Qty.       | 200 pc(s).                 |                                                              |  |

## Screwty® cable gland tool with torque function



## The ideal tool for any application

Screwty® is the ideal, all-purpose tool for tightening all common sensor and actuator cables. Even difficult-to-reach round plugs are accessible using the Screwty®. A simple turning movement tightens and loosens the connectors without the need for excessive force. The Screwty® is a unique and global solution since it fits with most cables and plugs from other vendors (over 90 %). The Screwty® consists of a handle with a conventional 1/4" adapter. Thus it can be used for all sizes: for M12 and M8 round plug-in connectors, and for M12F and M8F customisable plugs and sockets, as well as for all M23 plugs and sockets.

## General ordering data

| Type       | SCREWTY SET -DM            | Version                                           |  | Packaging     |  |
|------------|----------------------------|---------------------------------------------------|--|---------------|--|
| Order No.  | <a href="#">1920000000</a> | Cable gland tool for M8, M12 lines and connectors |  | Cardboard box |  |
| GTIN (EAN) | 4032248436859              |                                                   |  |               |  |
| Qty.       | 1 pc(s).                   |                                                   |  |               |  |

**SAI-4-M 8P M12 UT****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Accessories****M12**

Protective caps protect unassigned plug-in stations against external influences.

**General ordering data**

|            |                            |                                                |
|------------|----------------------------|------------------------------------------------|
| Type       | SAI-SK-M12                 | Version                                        |
| Order No.  | <a href="#">9456050000</a> | Protected component assemblies, Protective cap |
| GTIN (EAN) | 4008190304058              |                                                |
| Qty.       | 30 pc(s).                  |                                                |