
Flat terminal clamp

KF NH 3

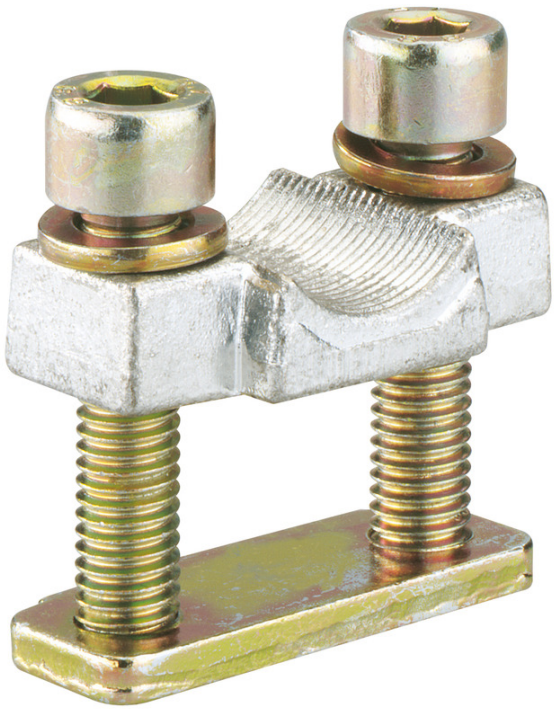

KF NH 3

Flat terminal clamp

Productnumber: 07671301
Dimensions: 17 x 58,5 x 30 mm

for NH fuse base, for NH fuse switch disconnector, for PE/N terminals, for copper conductors, for laminated flat copper

Clamp connection, for CU conductors 1x (150-300)rm/rf, Laminated flat copper 25 x 1-13 mm

Created at 04.06.2026. All statements without guarantee. We reserve the right to make improvements to technical progress.
Günther Spelsberg GmbH + Co. KG
Im Gewerbepark 1 · D-58579 Schalksmühle · Telefon: +49 (0) 23 55 / 892-0 · Telefax: +49 (0) 23 55 / 892-299

Technical Data

electrical characteristics

shockproof:	No
Connection 1: Connection type:	Screws
Connection 1: Clamping points per pole:	1
Connection 1: Suitable for Cu conductors:	1
Connection 1: Suitable for Al conductors:	1
Connection 1: Connectable conductor cross-section, fine-wire without ferrule (min):	150 mm²
Connection 1: Connectable conductor cross-section, fine-wire without ferrule (max):	300 mm²
Connection 1: Connectable conductor cross-section, fine-wire with ferrule (min):	150 mm²
Connection 1: Connectable conductor cross-section, fine-wire with ferrule (max):	300 mm²
Connection 1: Connectable conductor cross-section, single-wire (min):	150 mm²
Connection 1: Connectable conductor cross-section, single-wire (max):	300 mm²
Connection 1: Connectable conductor cross-section, stranded (min):	150 mm²
Connection 1:Connectable conductor cross-section, stranded (max):	300 mm²

Dimensions

Width:	17 mm
Length:	58.5 mm
Height:	30 mm
Weight:	0.1278 kg

Sales Information

EAN:	4013902859009
ETIM Class:	EC002498
Custom tariff number:	85369010
Minimum order quantity:	1