


date: 23/10/2026

# GUELL 3 A/W

## Part number 3116965

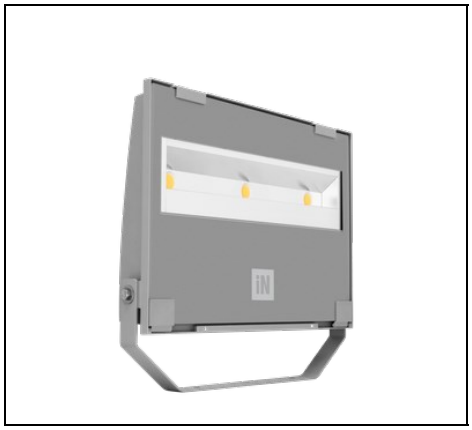

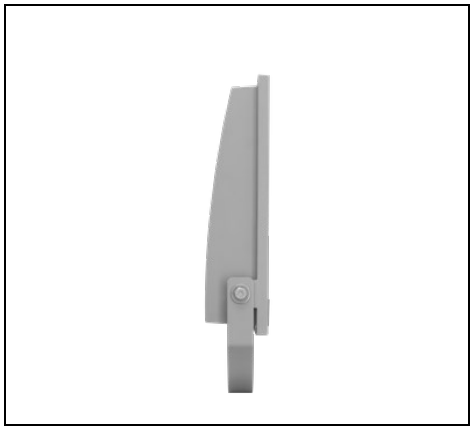

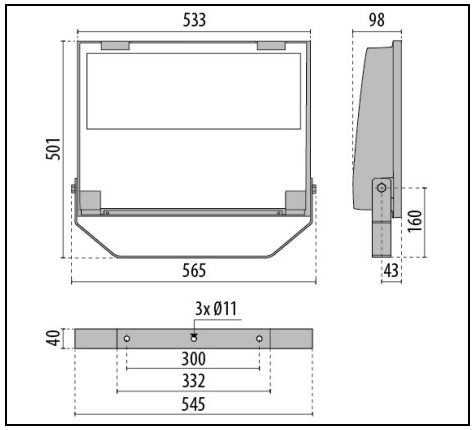


IP 66 | CLASS I | ≤-40°C | ULR<1 | CIEn°3>95 | DALI | SPD 10kV | CE | EAC | UKCA

### Description

LED floodlight for indoor and outdoor, comprising:

- Die-cast aluminium housing, polyester powder coat finish ISO 9227/12944 - ISO 9223 (C5)
- Extra clear, toughened, flat glass diffuser
- High-performance polished, oxidised, iridescence-free, aluminium reflector (Al 99.99)
- Anti-ageing custom moulded silicone sealing gasket(s)
- M20x1.5 cable gland for cables Ø10–Ø14 mm
- High asymmetrical distributions low-glare optic options available (A50/W versions)
- Stainless steel locking hardware
- Fully integrated stainless steel aluminium spring clips
- Powder-coated steel tiltable bracket
- Integral surge protection device (SPD) against mains overvoltages up to 10 kV (CM/DM)
- Openable and maintainable luminaire (future-proof)
- Consult factory for dimmable DALI versions with remote supply unit, up to a 50-metre maximum distance (A50 / W models only)
- Other colour temperatures (CCT) and colour rendering index (CRI) options available. Consult factory

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
**PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy**
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

**info.it@pil.lighting**
www.performanceinlighting.com

## Product data

| | | | |
|---|---|---|---|
| **ETIM Group:** | EG000027 | **ETIM Class:** | EC001744 |

## General information

| | | | |
|---|---|---|---|
| **Lampholder:** | LED | **Light source:** | LED |
| **Lightsource lumen output [lm]:** | 43015 | **Luminaire lumen output [lm]:** | 36328 |
| **Luminaire wattage [W]:** | 291 W | **Luminous efficacy [lm/W]:** | 125 |
| **CRI:** | 80 | **Colour temperature [K]:** | 4000 |
| **Colour / Finishing:** | GR-94 / Metallic grey / Textured | **IP degree of protection:** | IP66 |
| **Impact resistance / impact energy:** | IK07 3J xx5 | **Protection class:** | I |
| **Optic:** | A40/W - Asymmetric Wide | **Net weight [kg]:** | 10.03 |
| **Overall length [mm]:** | 565 | **Overall width [mm]:** | 501 |
| **Overall height [mm]:** | 98 | | |

## Mechanical features

| | | | |
|---|---|---|---|
| **Shape:** | Rectangular | **Housing material:** | Aluminium |
| **Diffuser material:** | Glass | **Glow wire test [°C]:** | 650 °C |
| **Frontal exposed area [m²]:** | 0.05 | **Lateral exposed area [m²]:** | 0.03 |
| **Top exposed area [m²]:** | 0.21 | | |

## Electrical features

| | | | |
|---|---|---|---|
| **Voltage type:** | AC | **Input voltage [V AC]:** | 220/240 |
| **Input frequency [Hz]:** | 50/60 | **Power factor / COS Φ:** | 0.9 |
| **Surge protection \| Common [kV]:** | 10.000000 | **Surge protection \| Differential [kV]:** | 10.000000 |
| **Inrush current [A/µs]:** | 110 / 500 | **C10 1.5 mm²:** | 2 |
| **C16 2.5 mm²:** | 3 | **B10 1.5 mm²:** | 1 |
| **B16 2.5 mm²:** | 2 | | |

## Installation

| | | | |
|---|---|---|---|
| **Application area:** | Outdoor lighting | **Mounting type:** | Professional floodlight |
| **Min. ambient temperature [°C]:** | -40 | **Max. ambient temperature [°C]:** | 40 |
| **Min. distance from lighted object [m]:** | 1.00 | | |

## Light features

| | | | |
|---|---|---|---|
| **MacAdam:** | 3 | **Lumen maintenance:** | L80B10@120000h |
| **Distribution of light emission:** | Direct | **Luminous Intensity Class:** | G*6 |
| **Zero light pollution (ULR = 0%):** | | **IPEA* (road lighting):** | A+ |
| **IPEA* (large areas, roundabouts):** | A4+ | **IPEA* (cycle-pedestrian):** | A++ |

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
**PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy**
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

**info.it@pil.lighting**
www.performanceinlighting.com


| | | | |
|---|---|---|---|
| **IPEA* (green areas):** | A++ | **IPEA* (historic city centers):** | A6+ |

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
**PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy**
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211


**info.it@pil.lighting**
www.performanceinlighting.com

## Photometric data

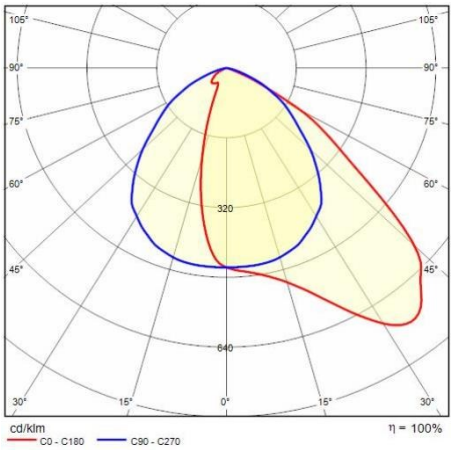


## Optional accessories

GUELL 3



**14452702**

Protective grid



**14453994**

Wall mount support 1000 mm

GR-94 / Metallic grey



**14453794**

Single pole top support GUELL 3 for poles Ø 60-76 mm/Ø 2.36"-2.99"


GR-94 / Metallic grey



**14453894**

Double pole top support GUELL 3 for poles Ø 60-76 mm/Ø 2.36"-2.99"

GR-94 / Metallic grey



**14461104**

GUELL 3 strengthening bracket. Suitable for one floodlight single point fixing M10 screw in centre of the bracket

INOX / Stainless steel

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
**PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy**
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

**info.it@pil.lighting**
www.performanceinlighting.com