

date: 15/10/2026

CLY DLS+DETEK

Part number 3116566



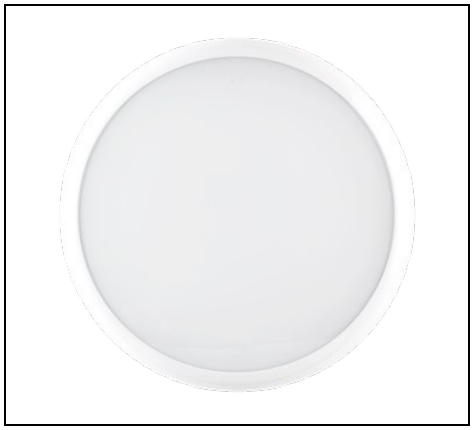

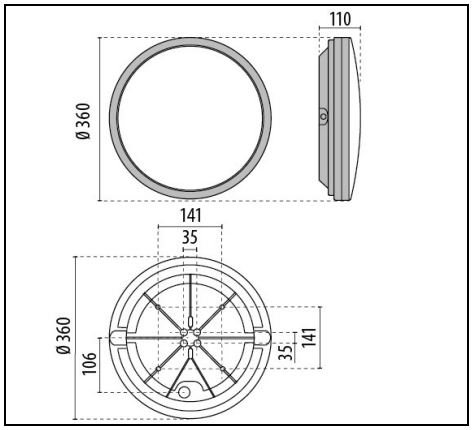



Description

Wall and ceiling mounted luminaire for indoor and outdoor, comprising:
- Technopolymer housing, trim and diffuser
- Anti-ageing custom moulded silicone sealing gasket(s)
- Class II
- Tilting easy-maintenance SMD LED board
- Dip switch for LED CCT control at 3000K or 4000K, field adjustable
- EM/3P version is designed for multipurpose 3 hours sustained emergency lighting
- Hyper-frequency (HF) sensor operating at 5.8 Ghz+/- 75 Mhz
- The DLS+DETEK versions are supplied with an electronic device complete with a High Frequency sensor and a daylight sensor (DLS). This is programmed to switch the device on automatically when natural light is low, ensuring constant secure lighting at 30% of the luminous flow and reaching 100% of the flow when any presence is detected
- The luminous flux data shown refer to the maximum power operating level

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com

date: 15/10/2026

Product data

ETIM Group:	EG000027	**ETIM Class:**	EC002892

General information

Lampholder:	LED	**Light source:**	LED
Lightsource lumen output [lm]:	2534	**Luminaire lumen output [lm]:**	1695
Luminaire wattage [W]:	17 W	**Luminous efficacy [lm/W]:**	100
CRI:	80	**Colour temperature [K]:**	3000/4000
Colour / Finishing:	WH-87 / White / Matt	**IP degree of protection:**	IP65
Impact resistance / impact energy:	IK10 20J xx9	**Protection class:**	II
Optic:	S/EW - Symmetric Extra-Wide	**Net weight [kg]:**	1.048
Overall diameter [mm]:	360	**Overall width [mm]:**	110

Mechanical features

Shape:	Round ≥ 300 mm	**Housing material:**	Plastic
Diffuser material:	Opal plastic	**Glow wire test [°C]:**	650 °C

Electrical features

Voltage type:	AC	**Input voltage [V AC]:**	220/240
Input frequency [Hz]:	50/60	**Power factor / COS Φ:**	>0.9
Inrush current [A/µs]:	8 / 36	**C10 1.5 mm²:**	100
C16 2.5 mm²:	166	**B10 1.5 mm²:**	100
B16 2.5 mm²:	166		

Installation

Application area:	Outdoor lighting	**Mounting type:**	Bulkhead
Min. ambient temperature [°C]:	-20	**Max. ambient temperature [°C]:**	40

Light features


MacAdam:	3	**Lumen maintenance:**	L70B10@64000h
Distribution of light emission:	Direct		

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com

Photometric data

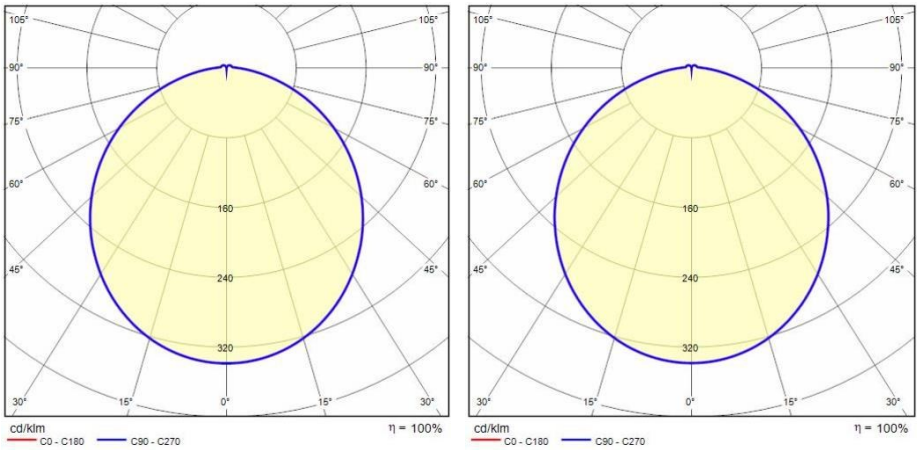

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com