


AP DKT4 PA**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

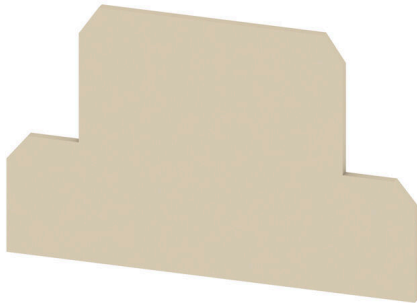

Logic functions AND, NAND, OR and NOR in modular terminal format with a rated cross-section of 4 mm². They each have five inputs which are fed – with logic gating – via a 24 V/20 mA PNP output. The logic components can be used for many applications involving the coupling of digital sensor/actuator signals with automation devices.

General ordering data

Version	End plate for terminals, beige, Height: 65 mm, Width: 1.5 mm, V-2, PA 66, Snap-on: Yes
Order No.	0687560000
Type	AP DKT4 PA
GTIN (EAN)	4008 190009465
Qty.	20 items

AP DKT4 PA

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Approvals

ROHS Conform

Dimensions and weights

Depth	65 mm	Depth (inches)	2.5591 inch
Height	65 mm	Height (inches)	2.5591 inch
Width	1.5 mm	Width (inches)	0.0591 inch
Net weight	3.26 g		

Temperatures

Storage temperature	-25 °C...55 °C	Ambient temperature	-50 °C...55 °C
Continuous operating temp., min.	-50 °C	Continuous operating temp., max.	100 °C

Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption		
REACH SVHC	No SVHC above 0.1 wt%		
Product Carbon Footprint	Cradle to gate	0.084 kg CO2eq.	

General data

Installation advice	Direct mounting	Protection degree	IP20
---------------------	-----------------	-------------------	------

Material data

Basic material	PA 66	Colour	beige
UL 94 flammability rating	V-2		

System specifications

Version	End plate		
---------	-----------	--	--

Additional technical data

Snap-on	Yes	Installation advice	Direct mounting
---------	-----	---------------------	-----------------

General

Installation advice	Direct mounting		
---------------------	-----------------	--	--

Classifications

ETIM 8.0	EC000886	ETIM 9.0	EC000886
ETIM 10.0	EC000886	ECLASS 14.0	27-25-03-01
ECLASS 15.0	27-25-03-01		