date: 23/10/2026

DROP 22 LED

Part number 303066

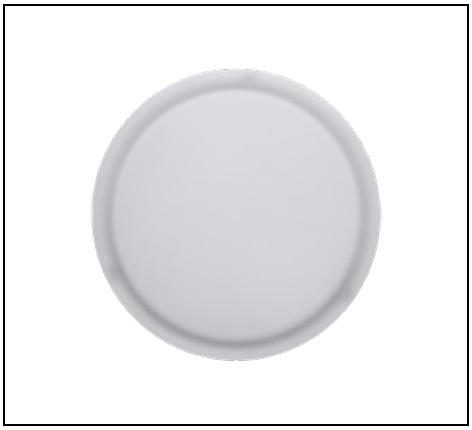

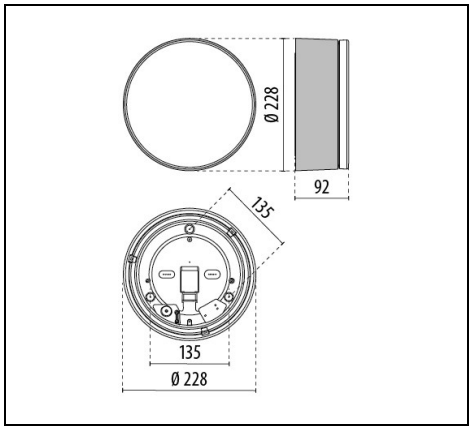

IP 55 | CLASS II

Description

Wall and ceiling mounted luminaire for indoor and outdoor, comprising:
- Housing manufactured from technopolymer
- Pressed glass diffuser, internally coated, and matt finished outside
- Class II
- Technopolymer silicone sealing gasket
- Side entry for 20 mm conduits (drill out holes in housing arrangement)
- Chromed steel spring locks to secure the diffuser to housing
- Self-adhesive pictograms available as accessory (ordered separately)
- LED SMD versions are complete with mid-power boards
- Design by ROBERTO FIORATO
- Design by ROBERTO FIORATO

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com

Product data

ETIM Group:	EG000027	**ETIM Class:**	EC002892

General information

Lampholder:	LED	**Light source:**	LED
Lightsource lumen output [lm]:	1281	**Luminaire lumen output [lm]:**	816
Luminaire wattage [W]:	11 W	**Luminous efficacy [lm/W]:**	74
CRI:	80	**Colour temperature [K]:**	4000
Colour / Finishing:	WH-87 / White / Textured	**IP degree of protection:**	IP55
Impact resistance / impact energy:	IK06 1J xx3	**Protection class:**	II
Optic:	S/EW - Symmetric Extra-Wide	**Net weight [kg]:**	1.754
Overall diameter [mm]:	228	**Overall width [mm]:**	95

Mechanical features

Shape:	Round 150 ≤ x ≤ 300 mm	**Housing material:**	Plastic
Diffuser material:	Glass	**Glow wire test [°C]:**	750 °C

Electrical features

Voltage type:	AC/DC	**Input voltage [V AC]:**	220/240
Input frequency [Hz]:	0/50/60	**Power factor / COS Φ:**	>0.9
Input voltage [V DC]:	170/276	**Inrush current [A/µs]:**	5 / 50
C10 1.5 mm²:	52	**C16 2.5 mm²:**	85
B10 1.5 mm²:	31	**B16 2.5 mm²:**	50

Installation

Application area:	Outdoor lighting	**Mounting type:**	Bulkhead
Min. ambient temperature [°C]:	-25	**Max. ambient temperature [°C]:**	25

Light features

MacAdam:	3	**Lumen maintenance:**	L80B10@50000h
Distribution of light emission:	Direct		

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com

Photometric data

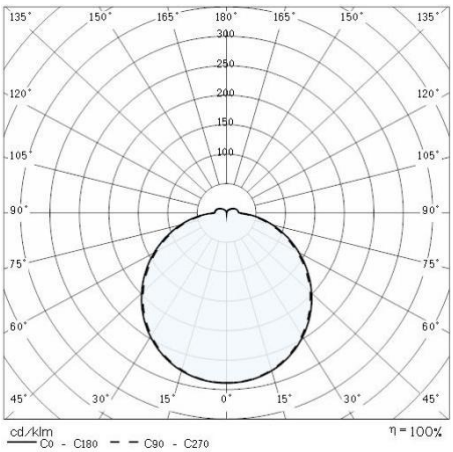

Optional accessories

DROP 22

008342
Arrow
GN1 / Green

008343
Extinguisher
RD1 / Red

008344
Man
BL1 / Blue

008345
Woman
BL1 / Blue

008346
Disabled
BL1 / Blue

008347
Toilet
BL1 / Blue

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com