
date: 23/10/2026

SL764+ SL DOUBLE HEAD LV

Part number 3115663





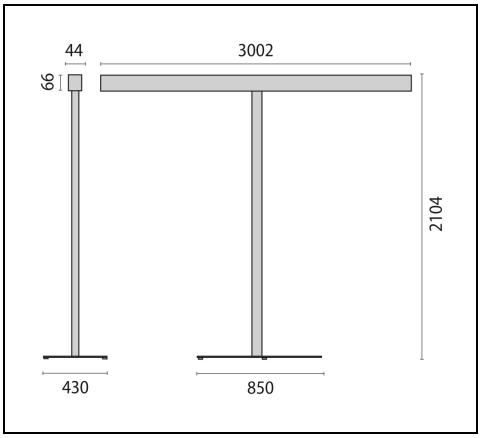

Description

Free-standing (SL) LED luminaire for indoor, comprising:
- Steel sheet head, extruded aluminium profile post, steel sheet base, polyester powder coat finish
- Practical U-shaped base enables luminaire to be positioned flexibly and flush to a writing desk
- Black grid for maximum luminaire efficiency, glare reduction and a high uniformity
- Direct / indirect light distribution
- VDU application suitable acc. to EN 12464-1
- Maintenance and installation-friendly design (complies with the EU Eco-Design Directive 2019/2020)
- Produced in Germany - with a focus on quality, short delivery routes and low environmental impact
- Sensor device available with task oriented PIR detector and daylight control
- The sensor's detection range can be finely adjusted via the shutter
- Direct and indirect light section can be switched and dimmed separately via push-buttons
- Colour tolerance according to MacAdam ≤ 3 SDCM
- Complete with flexible power cord with plug
- Special colour versions available. Consult factory

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com

Product data

ETIM Group:	EG000027	**ETIM Class:**	EC000300

General information

Lampholder:	LED	**Light source:**	LED
Luminaire lumen output [lm]:	19670	**Luminaire wattage [W]:**	141 W
Luminous efficacy [lm/W]:	140	**CRI:**	80
Colour temperature [K]:	4000	**Colour / Finishing:**	BK-RAL9005 / Black RAL9005 / Textured
IP degree of protection:	IP30	**Impact resistance / impact energy:**	IK05 0.7J xx3
Protection class:	I	**Optic:**	S/C - Symmetric direct-indirect
Beam angle:	2 x 38°/39°	**Net weight [kg]:**	28.042
Overall length [mm]:	3002	**Overall width [mm]:**	430
Overall height [mm]:	2104		

Mechanical features

Shape:	Rectangular	**Housing material:**	Aluminium
Diffuser material:	Plastic	**Glow wire test [°C]:**	650 °C

Electrical features

Voltage type:	AC	**Input voltage [V AC]:**	220/240
Input frequency [Hz]:	220-240V 50/60Hz	**Power factor / COS Φ:**	>0.9
Input voltage [V DC]:	186/250	**Inrush current [A/µs]:**	97 / 304
C10 1.5 mm²:	12	**C16 2.5 mm²:**	19
B10 1.5 mm²:	7	**B16 2.5 mm²:**	12

Installation

Application area:	Indoor lighting	**Mounting type:**	Free standing
Min. ambient temperature [°C]:	10	**Max. ambient temperature [°C]:**	40

Light features


MacAdam:	3	**Lumen maintenance:**	L80B10@50000h
Distribution of light emission:	Direct/Indirect	**DFF - Downward Flux Fraction [%]:**	36
UFF - Upward Flux Fraction [%]:	64	**UGR max.:**	12.0

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com

Photometric data

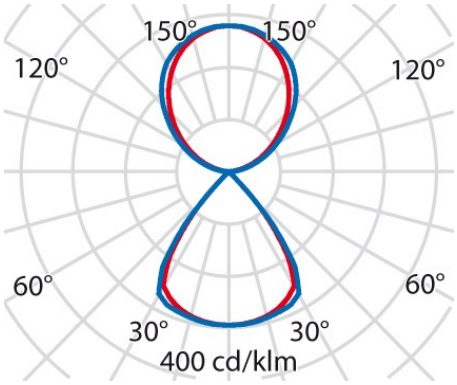

Optional accessories

SL764+ SL



8740195967

Remote control "Master"

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com