
PE/N terminal

PNS 123

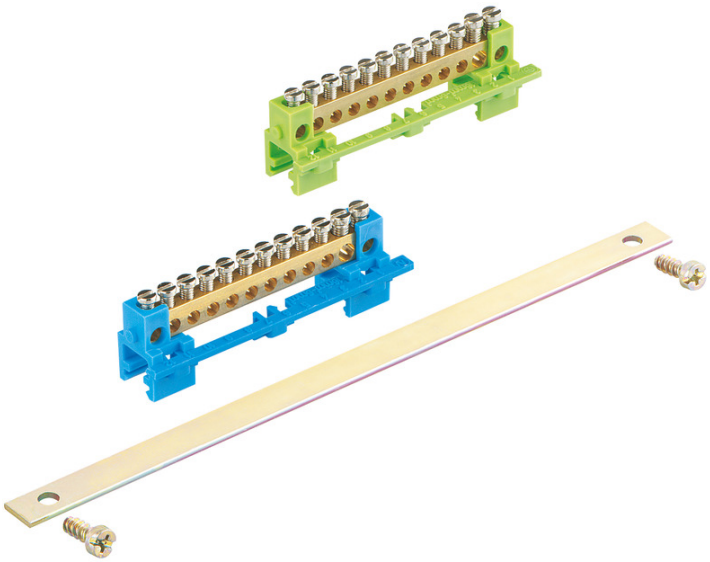

PNS 123

PE/N terminal

Productnumber: 07412301
Dimensions: 220 x 32 x 22 mm

PE/N terminal for installation in GTA distribution boards as additional terminals or for replacement

2 x 12-pole, 6/16 mm², for GTA 114, GTA 228, GTA 342, GTA 456

Created at 04.06.2026. All statements without guarantee. We reserve the right to make improvements to technical progress.
Günther Spelsberg GmbH + Co. KG
Im Gewerbepark 1 · D-58579 Schalksmühle · Telefon: +49 (0) 23 55 / 892-0 · Telefax: +49 (0) 23 55 / 892-299

Technical Data

electrical characteristics

Rated operating voltage AC:	400 V
Rated current:	76 A
Number of poles:	2
shockproof:	No
Connection 1: Connection type:	Screws
Connection 1: Clamping points per pole:	12
Connection 1: Suitable for Cu conductors:	1
Connection 1: Connectable conductor cross-section, single-wire (min):	6 mm²
Connection 1: Connectable conductor cross-section, single-wire (max):	16 mm²
Connection 2: Connection type:	Screws
Connection 2: Connectable conductor cross-section, single-wire (min):	1.5 mm²
Connection 2: Connectable conductor cross-section, single-wire (max):	6 mm²

Dimensions

Width:	220 mm
Length:	32 mm
Height:	22 mm
Weight:	0.12 kg

Material characteristics

Glow-wire flammability:	960 °C (EN 60695-2-11)

mechanical properties

Connection 1: Tightening moment:	1.4 Nm

Sales Information

EAN:	4013902051427
ETIM Class:	EC001284

Sales Information

Custom tariff number:	85369010
Minimum order quantity:	1

Material

Insulating body material:	Thermoplastic