


CRICKET+ 20 C/I

Part number 3111907

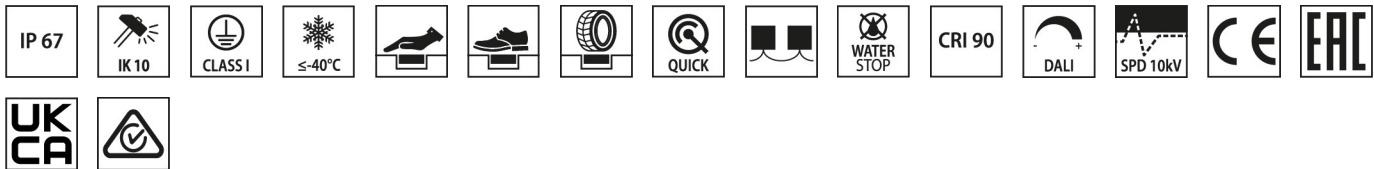

Description

Series of reduced depth in-ground luminaires, comprising:

- Black painted anodised die-cast aluminium housing
- Extra clear, toughened, flat glass diffuser
- High-transparency polycarbonate optics
- Intensive circular optic
- Anti-ageing custom moulded silicone sealing gasket(s) with resilient elastic return capacity
- Die-cast aluminium trim powder-coated
- Aluminium heat sink
- Mains connection through waterproof connection system (WATER-STOP)
- Stainless steel locking hardware
- Technopolymer recess box to be ordered separately
- Floor mounted luminaires are usually subject to harsh conditions. For proper use and safety, they must be correctly installed by qualified personnel and according to the manual instructions
- Do not install luminaires in sunken areas
- Rough-in kit fixing system designed for a safe installation even when it is not perfectly flush with the floor

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>

Product data

ETIM Group:	EG000027	ETIM Class:	EC000758
-------------	----------	-------------	----------

General information

Lampholder:	LED	Light source:	LED
Lightsource lumen output [lm]:	3195	Luminaire lumen output [lm]:	1907
Luminaire wattage [W]:	26 W	Luminous efficacy [lm/W]:	73
CRI:	90	Colour temperature [K]:	2700
Colour / Finishing:	AN-g6 / Anthracite gray / Textured	IP degree of protection:	IP67
Impact resistance / impact energy:	IK10 20J xxg	Protection class:	I
Optic:	C/I - Circular Intensive	Net weight [kg]:	4.85
Overall diameter [mm]:	270	Overall height [mm]:	145

Mechanical features

Shape:	Round $150 \leq x \leq 300$ mm	Housing material:	Aluminium
Diffuser material:	Glass	Glow wire test [°C]:	650 °C
Dinamic load [kg]:	7500	Speed [km/h]:	30
Static load [kg]:	2000	Shear load [kN]:	5
Resistance to torque [Nm]:	50		

Electrical features

Voltage type:	AC	Input voltage [V AC]:	198/264
Input frequency [Hz]:	50/60	Power factor / COS Φ :	>0.9
Surge protection Common [kV]:	6.000000	Surge protection Differential [kV]:	6.000000
Inrush current [A/ μ s]:	25 / 236	C10 1.5 mm ² :	20
C16 2.5 mm ² :	33	B10 1.5 mm ² :	12
B16 2.5 mm ² :	20		

Installation


Application area:	Outdoor lighting	Mounting type:	Inground
Min. ambient temperature [°C]:	-40	Max. ambient temperature [°C]:	35
Glass temperature [°C]:	42	Ingrounds classification:	A1 A2 A3 A4 A5
Min. distance from lighted object [m]:	0.50		

Light features

MacAdam:	3	Lumen maintenance:	L90B10@65000h
Distribution of light emission:	Direct		


To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>

Photometric data

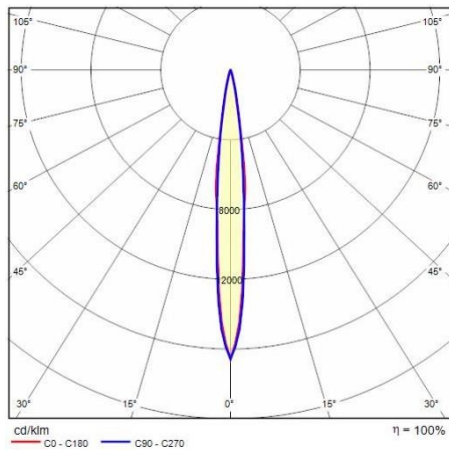

Mandatory accessories

CRICKET+ 20



3111135

Recessed fixing kit

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/gr/company/led-warranty>

For information:
PERFORMANCE IN LIGHTING S.p.A. Headquarters - Italy
 Viale del Lavoro 9/11
 37030 Colognola ai Colli Verona - Italy
 Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com