


Description	Remote reclosing device
Suitable for	RCBO's MDC/MT+BD or MCB's MTC/MT
Rated voltage	230 V
Rated current	max 63A (MT) max 32A (MDC-MTC)
Rated frequency (Hz)	50Hz
Distribution system	TT-TN-IT
No. of modules EN 50022	2
Insulation voltage (Ui)	500 V

Rated impulse withstand voltage (Uimp)	4 kV	Overvoltage category	III
Dielectric strength test voltage between pole and earth	2500 Vac for 1 minute	Type of residual current protection	AC-A-A[IR]-A[S]-F
Rated residual operating current	30 - 300 - 500 - 1000 mA	Operating temperature	-25 +60 °C
Stocking temperature	-40°C ÷ +70°C	Type of contacts	1 Changeover
Voltage operating	230 Vac/30 Vdc	Current operating	1,5mA ac - 0,8mA dc
Use category	AC12	Operating modes	CO
Terminal section	≤ 2,5 mm²	Rated tightening torque	0,4 Nm
Settable insulation threshold	No		

DIMENSIONAL

WIRING DIAGRAM

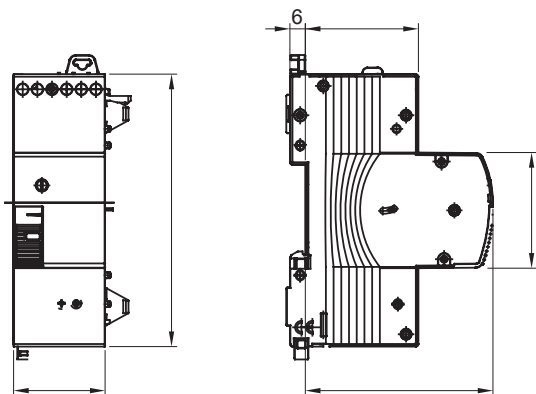

STANDARDS/APPROVALS

