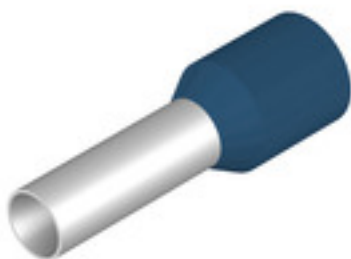


**H2,5/14S BL SV****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Similar to illustration**

- in multi-pack bag (5 x 100 pcs.)
- Weidmüller colour code
- DIN colour code
- other colour code

**General ordering data**

|            |                                               |
|------------|-----------------------------------------------|
| Version    | Wire-end ferrule, Standard, 10 mm, 8 mm, blue |
| Order No.  | <a href="#">9046230000</a>                    |
| Type       | H2,5/14S BL SV                                |
| GTIN (EAN) | 4032248298631                                 |
| Qty.       | 500 pc(s).                                    |
| Packaging  | Multipack bag                                 |

**H2,5/14S BL SV****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Dimensions and weights**

|            |         |
|------------|---------|
| Net weight | 0.152 g |
|------------|---------|

**Technical data**

| Description of article | Wire end ferrule with plastic collar, blue | Version | Standard |
|------------------------|--------------------------------------------|---------|----------|
|------------------------|--------------------------------------------|---------|----------|

**Wire-end ferrules**

|                             |                     |                                         |             |
|-----------------------------|---------------------|-----------------------------------------|-------------|
| Collar diameter (D2)        | 4 mm                | Colour code                             | Weidmueller |
| Conductor cross-section     | 2.5 mm <sup>2</sup> | Contact surface diameter (D1)           | 2.2 mm      |
| Contact surface length (L2) | 8 mm                | L1 in mm                                | 14 mm       |
| Metal sleeve thickness (S1) | 0.15 mm             | Plastic collar thickness (S2)           | 0.25 mm     |
| Stripping length            | 10 mm               | Wire connection cross section AWG, max. | AWG 14      |

**Classifications**

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC000005    | ETIM 7.0    | EC000005    |
| ETIM 8.0    | EC000005    | ETIM 9.0    | EC000005    |
| ETIM 10.0   | EC000005    | ECLASS 9.0  | 27-40-02-01 |
| ECLASS 9.1  | 27-40-02-01 | ECLASS 10.0 | 27-40-02-01 |
| ECLASS 11.0 | 27-40-02-01 | ECLASS 12.0 | 27-40-02-01 |
| ECLASS 13.0 | 27-40-02-01 | ECLASS 14.0 | 27-40-02-01 |
| ECLASS 15.0 | 27-40-02-01 |             |             |

**Environmental Product Compliance**

|                        |                             |
|------------------------|-----------------------------|
| RoHS Compliance Status | Compliant without exemption |
| REACH SVHC             | No SVHC above 0.1 wt%       |

**Approvals**

|      |         |
|------|---------|
| ROHS | Conform |
|------|---------|

**Downloads**

|                    |                                                                                          |
|--------------------|------------------------------------------------------------------------------------------|
| User Documentation | <a href="#">Technical information - EN</a><br><a href="#">Technical information - DE</a> |
| Catalogues         | <a href="#">Catalogues in PDF-format</a>                                                 |

## H2,5/14S BL SV

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

# Drawings

## Drawing

