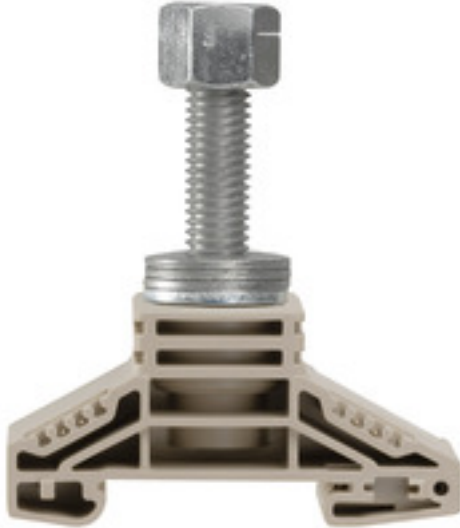


**WF 10 NFF****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Product image**

The comprehensive range of stud terminals ensures secure connections for all power transmission applications. Connections range from 10 mm<sup>2</sup> to 300 mm<sup>2</sup>. The connectors are attached to the threaded pins using crimped cable lugs and each connection is secured by tightening the hexagon nut. Stud terminals with threaded pins from M5 to M16 can be used according to the wire cross-section.

**General ordering data**

|            |                                                                                                                       |
|------------|-----------------------------------------------------------------------------------------------------------------------|
| Version    | Bolt-type screw terminals, Feed-through terminal, Rated cross-section: 120 mm <sup>2</sup> , Threaded stud connection |
| Order No.  | <a href="#">1968950000</a>                                                                                            |
| Type       | WF 10 NFF                                                                                                             |
| GTIN (EAN) | 4032248702862                                                                                                         |
| Qty.       | 20 pc(s).                                                                                                             |

## WF 10 NFF

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

|            |         |                 |            |
|------------|---------|-----------------|------------|
| Depth      | 72.5 mm | Depth (inches)  | 2.854 inch |
| Height     | 67 mm   | Height (inches) | 2.638 inch |
| Width      | 33.8 mm | Width (inches)  | 1.331 inch |
| Net weight | 100.7 g |                 |            |

## Temperatures

|                                  |                |                                  |               |
|----------------------------------|----------------|----------------------------------|---------------|
| Storage temperature              | -25 °C...55 °C | Ambient temperature              | -5 °C...40 °C |
| Continuous operating temp., min. | -50 °C         | Continuous operating temp., max. | 120 °C        |

## Material data

|                           |       |        |            |
|---------------------------|-------|--------|------------|
| Material                  | Wemid | Colour | dark beige |
| UL 94 flammability rating | V-0   |        |            |

## System specifications

|                                     |                       |                                   |       |
|-------------------------------------|-----------------------|-----------------------------------|-------|
| Version                             | Single-stud terminals | End cover plate required          | No    |
| Number of potentials                | 1                     | Number of levels                  | 1     |
| Number of clamping points per level | 1                     | Levels cross-connected internally | No    |
| PE connection                       | No                    | Rail                              | TS 35 |

## Additional technical data

|                          |      |                             |         |
|--------------------------|------|-----------------------------|---------|
| Explosion-tested version | No   | Number of similar terminals | 1       |
| Open sides               | Open | Type of mounting            | Snap-on |

## Conductors for clamping (rated connection)

|                                                      |                          |                                                      |                          |
|------------------------------------------------------|--------------------------|------------------------------------------------------|--------------------------|
| 2 x cable lugs DIN 46 234                            | 6 to 120 mm <sup>2</sup> | 2 x cable lugs DIN 46 235                            | 10...95 mm <sup>2</sup>  |
| Cable lug to DIN 46234                               | 6...120 mm <sup>2</sup>  | Cable lug to DIN 46235                               | 10...95 mm <sup>2</sup>  |
| Clamping range, max.                                 | 120 mm <sup>2</sup>      | Clamping range, min.                                 | 6 mm <sup>2</sup>        |
| Connection cross-section, stranded, max.             | 120 mm <sup>2</sup>      | Connection cross-section, stranded, min.             | 6 mm <sup>2</sup>        |
| Connection direction                                 | on side                  | Number of connections                                | 1                        |
| Stud size for spade connection                       | M 10                     | Tightening torque, max.                              | 36 Nm                    |
| Tightening torque, min.                              | 30 Nm                    | Type of connection                                   | Threaded stud connection |
| Wire connection cross section AWG, max.              | kcmil 250                | Wire connection cross section AWG, min.              | AWG 8                    |
| Wire connection cross section, finely stranded, max. | 120 mm <sup>2</sup>      | Wire connection cross section, finely stranded, min. | 6 mm <sup>2</sup>        |
| Wire connection cross-section, solid core, max.      | 120 mm <sup>2</sup>      | Wire connection cross-section, solid core, min.      | 6 mm <sup>2</sup>        |

## Dimensions

|              |         |
|--------------|---------|
| TS 35 offset | 31.5 mm |
|--------------|---------|

## General

|                                         |           |                                         |               |
|-----------------------------------------|-----------|-----------------------------------------|---------------|
| Rail                                    | TS 35     | Standards                               | IEC 60947-7-1 |
| Wire connection cross section AWG, max. | kcmil 250 | Wire connection cross section AWG, min. | AWG 8         |

## WF 10 NFF

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Rating data

|                                             |                     |                                                  |         |
|---------------------------------------------|---------------------|--------------------------------------------------|---------|
| Rated cross-section                         | 120 mm <sup>2</sup> | Rated voltage                                    | 1,000 V |
| Rated DC voltage                            | 1,000 V             | Voltage with epoxy resin partition plate         | 2,300 V |
| Rated current                               | 269 A               | Current at maximum wires                         | 269 A   |
| Standards                                   | IEC 60947-7-1       | Volume resistance according to IEC 60947-7-x     | 0.12 mΩ |
| Rated impulse withstand voltage             | 8 kV                | Impulse voltage with epoxy resin partition plate | 12 kV   |
| Power loss in accordance with IEC 60947-7-x | 8.61 W              | Pollution severity                               | 3       |

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC000897    | ETIM 7.0    | EC000897    |
| ETIM 8.0    | EC000897    | ETIM 9.0    | EC000897    |
| ETIM 10.0   | EC000897    | ECLASS 9.0  | 27-14-11-20 |
| ECLASS 9.1  | 27-14-11-20 | ECLASS 10.0 | 27-14-11-20 |
| ECLASS 11.0 | 27-14-11-20 | ECLASS 12.0 | 27-14-11-20 |
| ECLASS 13.0 | 27-25-01-01 | ECLASS 14.0 | 27-25-01-01 |
| ECLASS 15.0 | 27-25-01-01 |             |             |

## Environmental Product Compliance

|                        |                             |
|------------------------|-----------------------------|
| RoHS Compliance Status | Compliant without exemption |
| REACH SVHC             | No SVHC above 0.1 wt%       |

## Approvals

Approvals



|                 |                                                                                                                                                                                                                                                                                                                                                         |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Approvals MAMID | <a href="https://mdcop.weidmueller.com/mediadelivery/rendition/900_319222/-T1z1mm-S800/">https://mdcop.weidmueller.com/mediadelivery/rendition/900_319222/-T1z1mm-S800/</a> <a href="https://mdcop.weidmueller.com/mediadelivery/rendition/900_319260/-T1z1mm-S800/">https://mdcop.weidmueller.com/mediadelivery/rendition/900_319260/-T1z1mm-S800/</a> |
| ROHS            | Conform                                                                                                                                                                                                                                                                                                                                                 |

## Downloads

|                                             |                                                                                                                                                                |
|---------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Approval/Certificate/Document of Conformity | <a href="#">CE Declaration of Conformity</a><br><a href="#">UKCA declaration of conformity</a><br><a href="#">Confirmation of Standards EN 45545-2_2020-10</a> |
| Engineering Data                            | <a href="#">CAD data – STEP</a>                                                                                                                                |
| User Documentation                          | <a href="#">StorageConditionsTerminalBlocks</a>                                                                                                                |
| Catalogues                                  | <a href="#">Catalogues in PDF-format</a>                                                                                                                       |
| Brochures                                   |                                                                                                                                                                |

**WF 10 NFF**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

Drawings



## WF 10 NFF

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## Blank



WS markers are the perfect match for the W-series connectors. Thanks to their system compatibility, the WS tags can also be used with the I-series and the Z-series. The large marking surfaces do not only permit long character strings but also multi-line text. WS markers are ideal for labels with long, customised character strings. Thanks to the proven MultiCard format, printing with PrintJet CONNECT oder/or Plotter is possible.

- Can be fitted in strips or individually
- Markers in proven MultiCard format

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

|            |                            |                                                                    |
|------------|----------------------------|--------------------------------------------------------------------|
| Type       | WS 15/5 MC NE WS           | Version                                                            |
| Order No.  | <a href="#">1609880000</a> | WS, Terminal marker, 15 x 5 mm, Pitch in mm (P): 5.00 Weidmueller, |
| GTIN (EAN) | 4008190203504              | Allen-Bradley, white                                               |
| Qty.       | 480 pc(s).                 |                                                                    |

## Marker holder



The marker holder offer the possibility of additional mounting of standard markers with a pitch of 5 or 5.1 mm. The angled holders can be optionally snapped together and could be mounted in all standard marking channels of the Klippon<sup>®</sup> Connect modular terminal blocks. Fitting marker types could be found under the respective accessories of the designation marking holder.

## General ordering data

|            |                            |                            |
|------------|----------------------------|----------------------------|
| Type       | BZT 1 ZA WS 10/5           | Version                    |
| Order No.  | <a href="#">1805520000</a> | Accessories, Marker holder |
| GTIN (EAN) | 4032248270248              |                            |
| Qty.       | 100 pc(s).                 |                            |

|            |                            |                            |
|------------|----------------------------|----------------------------|
| Type       | BZT 1 WS 10/5              | Version                    |
| Order No.  | <a href="#">1805490000</a> | Accessories, Marker holder |
| GTIN (EAN) | 4032248270231              |                            |
| Qty.       | 100 pc(s).                 |                            |

## WF 10 NFF

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## WF/WFF-Series



The additional connection enables a separate voltage tap. This can be used, for example, for the emergency power supply before the main switch or simply as an additional connection within the application.

## General ordering data

|            |                            |                                 |
|------------|----------------------------|---------------------------------|
| Type       | WZAF 120                   | Version                         |
| Order No.  | <a href="#">1066300000</a> | Auxiliary connection (terminal) |
| GTIN (EAN) | 4008190024642              |                                 |
| Qty.       | 10 pc(s).                  |                                 |

## Standard

Screwable cross-connections are easy to mount and de mount. Thanks to the big contact surface, even high currents can be transmitted with maximum contact reliability.



## General ordering data

|            |                            |                                                                |
|------------|----------------------------|----------------------------------------------------------------|
| Type       | WQL 2 WF10                 | Version                                                        |
| Order No.  | <a href="#">1781010000</a> | Bolt-type screw terminals, Cross-connector, Number of poles: 2 |
| GTIN (EAN) | 4032248219421              |                                                                |
| Qty.       | 5 pc(s).                   |                                                                |
| Type       | WQL 3 WF10                 | Version                                                        |
| Order No.  | <a href="#">1781020000</a> | Bolt-type screw terminals, Cross-connector, Number of poles: 3 |
| GTIN (EAN) | 4032248241217              |                                                                |
| Qty.       | 5 pc(s).                   |                                                                |
| Type       | WQL 4 WF10                 | Version                                                        |
| Order No.  | <a href="#">1027840000</a> | Bolt-type screw terminals, Cross-connector, Number of poles: 4 |
| GTIN (EAN) | 4032248779956              |                                                                |
| Qty.       | 5 pc(s).                   |                                                                |

## WF 10 NFF

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## Blank



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

|            |                            |                                                           |
|------------|----------------------------|-----------------------------------------------------------|
| Type       | DEK 5/6 MC NE WS           | Version                                                   |
| Order No.  | <a href="#">1609820000</a> | Dekafix, Terminal marker, 5 x 6 mm, Pitch in mm (P): 6.00 |
| GTIN (EAN) | 4008190203436              | Weidmueller, white                                        |
| Qty.       | 1,000 pc(s).               |                                                           |

## W-Series



Weidmüller's range of products includes end brackets that guarantee a permanent, reliable mounting on the terminal rail and prevent sliding. Versions with and without screws are available. The end brackets include marking options, also for group markers, and also a test plug holder.

## General ordering data

|            |                            |                                                                |
|------------|----------------------------|----------------------------------------------------------------|
| Type       | WEW 35/2                   | Version                                                        |
| Order No.  | <a href="#">1061200000</a> | End bracket, dark beige, TS 35, HB, Wemid, Width: 8 mm, 100 °C |
| GTIN (EAN) | 4008190030230              |                                                                |
| Qty.       | 50 pc(s).                  |                                                                |

## WF 10 NFF

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## WF / WFF-Series



A partition plate is used for the optical separation of circuits or used for electrical isolation from neighbouring cross-connectors. In contrast to the end plate, the contour can be larger than the adjacent terminal blocks. However, it should not be smaller, as otherwise the required clearance and creepage distances within the application can no longer be maintained.

## General ordering data

|            |                            |                                                              |
|------------|----------------------------|--------------------------------------------------------------|
| Type       | WTW WF10/WF12              | Version                                                      |
| Order No.  | <a href="#">1780890000</a> | Bolt-type screw terminals, Partition plate, dark beige, 3 mm |
| GTIN (EAN) | 4032248219391              |                                                              |
| Qty.       | 20 pc(s).                  |                                                              |
| Type       | WTW WF10/WF12 2300         | Version                                                      |
| Order No.  | <a href="#">1780920000</a> | Bolt-type screw terminals, Partition plate, grey, 2 mm       |
| GTIN (EAN) | 4032248241149              |                                                              |
| Qty.       | 20 pc(s).                  |                                                              |

## DEK 5/6



## WS/ DEK

MultiMark terminal markers use an innovative composite material made from two components. The hard base contour of the marker snaps securely into the connector. The elastic surface finish makes the marker easy to mount. This specially punched material enables the strips to be stretched to accommodate the slight variations in spacing that tend to add up, especially with long terminal blocks. Another advantage: the excellent printability of the surface material guarantees durable and wear-resistant labelling. A print resolution of 300 dpi also produces a very legible script.

## Your benefits with MultiMark

- Firm hold and durable printing
- Continuous strips save installation time
- Easy mounting thanks to an innovative composite material
- Large label field for optimal legibility
- High flexibility thanks to manufacturer independence

## General ordering data

|            |                            |                                                        |
|------------|----------------------------|--------------------------------------------------------|
| Type       | DEK 5/6 MM WS              | Version                                                |
| Order No.  | <a href="#">2007120000</a> | Dekafix, Terminal marker, 5 x 6 mm, Weidmueller, white |
| GTIN (EAN) | 4050118392104              |                                                        |
| Qty.       | 600 pc(s).                 |                                                        |



## WF 10 NFF

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## Step-down bridges



Reducing cross-connectors enable simple and fast connection of terminal blocks with different rated cross-sections.

## General ordering data

|            |                            |                                                                |
|------------|----------------------------|----------------------------------------------------------------|
| Type       | WQL 2 WF6-10               | Version                                                        |
| Order No.  | <a href="#">1806620000</a> | Bolt-type screw terminals, Cross-connector, Number of poles: 2 |
| GTIN (EAN) | 4032248294732              |                                                                |
| Qty.       | 5 pc(s).                   |                                                                |
| Type       | WQL 3 WF6-10/2             | Version                                                        |
| Order No.  | <a href="#">1806640000</a> | Bolt-type screw terminals, Cross-connector, Number of poles: 3 |
| GTIN (EAN) | 4032248294695              |                                                                |
| Qty.       | 5 pc(s).                   |                                                                |
| Type       | SMSE WF10/2XM6             | Version                                                        |
| Order No.  | <a href="#">1868880000</a> | Bolt-type screw terminals, Busbar, Number of poles:            |
| GTIN (EAN) | 4032248499755              |                                                                |
| Qty.       | 10 pc(s).                  |                                                                |

## Cover profiles



Cover profiles provide protection against external impact on functional areas of the terminal blocks or in combination with our support brackets for the entire terminal strip. They provide protection against electric shock caused by accidental contact with live parts due to operation or faults.

## General ordering data

|            |                            |                                                                |
|------------|----------------------------|----------------------------------------------------------------|
| Type       | HA ADP WF6/WF10            | Version                                                        |
| Order No.  | <a href="#">1781050000</a> | Bolt-type screw terminals, Cover profile, dark beige, 2.2 mm   |
| GTIN (EAN) | 4032248241231              |                                                                |
| Qty.       | 10 pc(s).                  |                                                                |
| Type       | ADP WF10/WF12              | Version                                                        |
| Order No.  | <a href="#">1780940000</a> | Bolt-type screw terminals, Cover profile, Transparent, 1000 mm |
| GTIN (EAN) | 4032248241255              |                                                                |
| Qty.       | 1 m                        |                                                                |