
Receptacle

U 71 K GRD

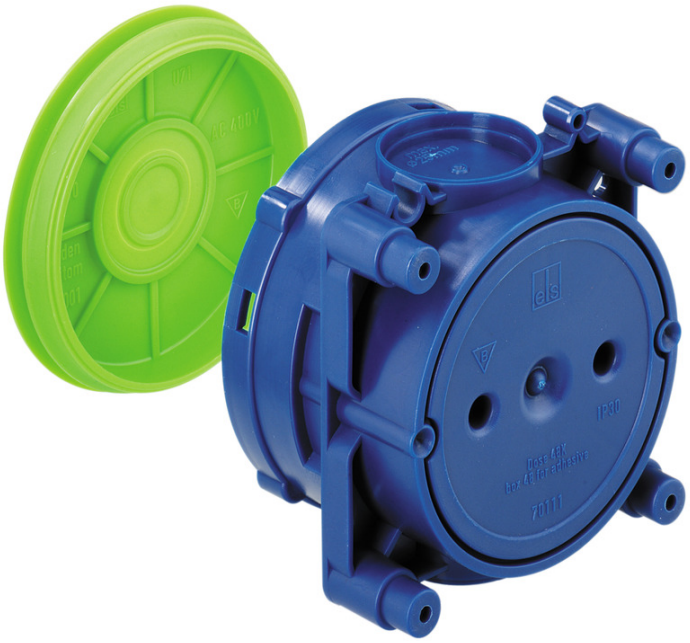

U 71 K GRD

Receptacle

Productnumber: 97174501
Dimensions: 71 x 71 x 50 mm

Receptacle, 2 screw bosses with 60 mm screw spacing, combinable with normal 71 mm spacing, fully insulated cable transition, suitable for all types of formwork and opposing formwork, protection class IP30, rated insulation voltage: 400V AC, certified by VDE (DIN EN 60670-1/-22 (VDE 0606-1/-22)), Halogen free

2-part, adhesive fixing or nail installation, membrane for perforation, sealing range M16 - M25, support spar compatible

Technical Data

electrical characteristics

Rated insulation voltage AC:	400 V
Type of protection:	IP30
Suitable for:	Concrete construction
UL Type Rating:	not specified

Colours

Cover colour:	other

Dimensions

Width:	71 mm
Length:	71 mm
Height:	50 mm
Weight:	0.04 kg

Material characteristics

Halogen free:	yes
Flammability class according with UL94:	HB
Glow-wire flammability:	650 °C (EN 60695-2-11)

mechanical properties

Type of fastening:	adhesive fixing or nail installation

Ambient conditions

max. relative humidity 25°C:	- %
max. relative humidity 40°C:	50 %
Min. ambient temperature:	-25 °C
Max. ambient temperature:	40 °C
24h ambient temperature:	35 °C

Sales Information

EAN:	4013902855773
ETIM Class:	EC002601
Custom tariff number:	39269097
Minimum order quantity:	1

Material

Base unit material:	Polypropylene
Cover material:	Polypropylene

Certificates

Test mark:	VDE (DIN EN 60670-1/-22 (VDE 0606-1/-22))

Accessories

97924801 - KR - IBT Accessories

97910001 - VD 75 - sealing plate

Günther Spelsberg GmbH + Co. KG
Im Gewerbepark 1 · D-58579 Schalksmühle · Telefon: +49 (0) 23 55 / 892-0 · Telefax: +49 (0) 23 55 / 892-299

Cable gland

