
Null conductor terminal

AK N 47-S

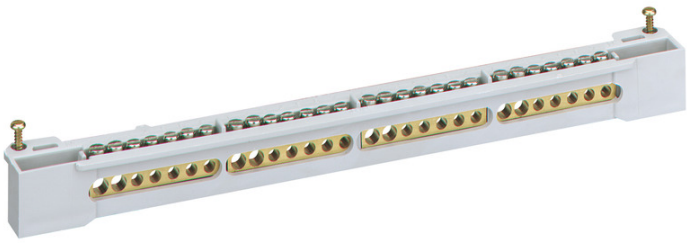

AK N 47-S

Null conductor terminal

Productnumber: 79004701
Dimensions: 242 x 25 x 23 mm

Auxiliary terminal, for subsequent attachment to AK PE/N basic terminals from AK 14

4 x 7-pole,, with each 2 clamping points 16 mm², 5 clamping points 6 mm²

Created at 04.06.2026. All statements without guarantee. We reserve the right to make improvements to technical progress.
Günther Spelsberg GmbH + Co. KG
Im Gewerbepark 1 · D-58579 Schalksmühle · Telefon: +49 (0) 23 55 / 892-0 · Telefax: +49 (0) 23 55 / 892-299

Technical Data

electrical characteristics

Rated operating voltage AC:	400 V
Number of poles:	4
shockproof:	No
Connection 1: Connection type:	Screws
Connection 1: Strip length:	12 mm
Connection 1: Clamping points per pole:	7
Connection 1: Suitable for Cu conductors:	1
Connection 1: Connectable conductor cross-section, single-wire (min):	6 mm²
Connection 1: Connectable conductor cross-section, single-wire (max):	16 mm²
Connection 2: Connection type:	Screws
Connection 2: Suitable for Cu conductors:	1
Connection 2: Connectable conductor cross-section, single-wire (min):	1.5 mm²
Connection 2: Connectable conductor cross-section, single-wire (max):	6 mm²

Dimensions

Width:	242 mm
Length:	25 mm
Height:	23 mm
Weight:	0.11 kg

Material characteristics

Burning behaviour in accordance with UL 50/UL 746C:	V2
Flammability class according with UL94:	V2
Glow-wire flammability:	960 °C (EN 60695-2-11)

mechanical properties

Connection 1: Tightening moment:	1.4 Nm

mechanical properties

Connection 2: Tightening torque:	1.4 Nm

Sales Information

EAN:	4013902062683
ETIM Class:	EC001284
Custom tariff number:	85369010
Minimum order quantity:	1

Material

Insulating body material:	Thermoplastic