

date: 15/10/2026


ELA 625 PR

Part number 3118518



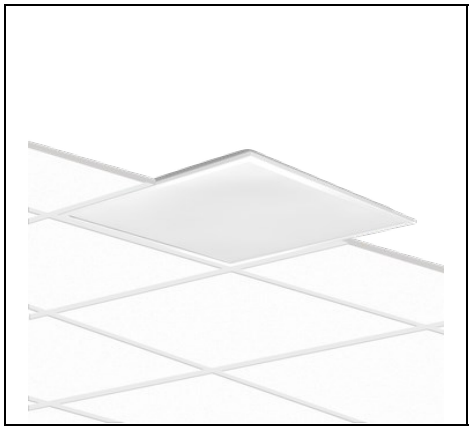

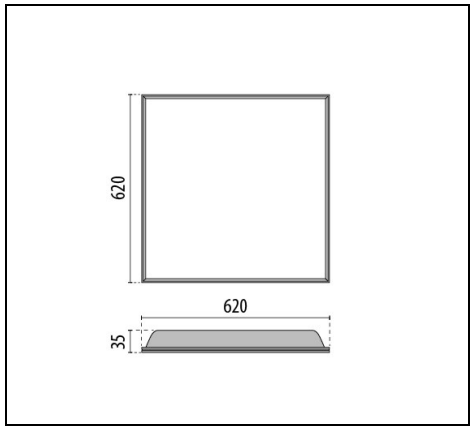



Description

Inlayed, square LED luminaire for indoors, comprising:
- Extruded aluminium housing profile, powder-coated
- Prismatic diffuser for efficient light distribution, glare reduction and a high uniformity
- VDU application suitable acc. to EN 12464-1
- UGR<19
- Inlayed luminaire suitable for lattice and coffered ceilings
- Colour tolerance according to MacAdam ≤ 3 SDCM
- Electronic converter included

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com

Product data

ETIM Group:	EG000027	**ETIM Class:**	EC002892

General information

Lampholder:	LED	**Light source:**	LED
Luminaire lumen output [lm]:	3720	**Luminaire wattage [W]:**	33 W
Luminous efficacy [lm/W]:	113	**CRI:**	80
Colour temperature [K]:	3000	**Colour / Finishing:**	WH-RAL9016 / White RAL9016 / Textured
IP degree of protection:	IP20	**IP above/below ceiling:**	IP20/IP43
Impact resistance / impact energy:	IK06 1J xx3	**Protection class:**	II
Optic:	S/A - Symmetric direct	**Beam angle:**	2 x 47°/47°
Net weight [kg]:	3.7	**Overall length [mm]:**	620
Overall width [mm]:	620	**Overall height [mm]:**	35

Mechanical features

Shape:	Square ≥ 300 mm	**Housing material:**	Aluminium
Diffuser material:	Transparent plastic	**Glow wire test [°C]:**	650 °C

Electrical features

Voltage type:	AC	**Input voltage [V AC]:**	220/240
Input frequency [Hz]:	220-240V 50/60Hz	**Power factor / COS Φ:**	0.9
Inrush current [A/µs]:	20 / 120	**C10 1.5 mm²:**	22
C16 2.5 mm²:	35	**B10 1.5 mm²:**	22
B16 2.5 mm²:	35		

Installation

Application area:	Indoor lighting	**Mounting type:**	Ceiling recessed
Min. ambient temperature [°C]:	10	**Max. ambient temperature [°C]:**	40

Light features


MacAdam:	4	**Lumen maintenance:**	L80B10@50000h
Distribution of light emission:	Direct	**DFF - Downward Flux Fraction [%]:**	100
UFF - Upward Flux Fraction [%]:	0	**UGR max.:**	15.0

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com

Photometric data

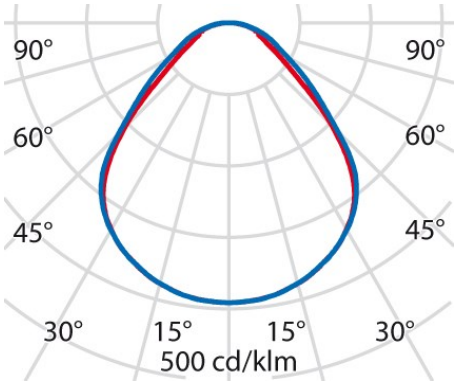

Optional accessories


ELA 625



3122585

External Casambi module

■ BK-81 / Black



3122586

Single wireless wall switch

☐ WH-87 / White



3122587

Double wireless wall switch

☐ WH-87 / White

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com