Terminal block enclosure

AKi-R 4/34-SL



AKi-R 4/34-SL

Terminal block enclosure

CUSTOMIZABLE

Productnumber: 74303401
Dimensions: 300 x 150 x 132 mm

Terminal block enclosure, protection class IP65, nominal cross-section 4 mm², Ui=400V AC, Polycarbonate, internal fixing points, for installations in industrial environments and protected outdoor areas

equipped with 34 screwless terminals 4mm², (type Weidmüller ZDU 4)

Accessories supplied:
10 Double-membrane seal IP66 M20 sealing range 7 - 12 mm, 2 Double-membrane seals IP66 M25 sealing range 9 - 16 mm, 2 Double-membrane seal M32 sealing range 14 - 21 mm, 1 Double-membrane seal IP66 M40 sealing range 19 - 28 mm

IP65 | 4² | IK08 | 400V AC

Created at 04.06.2026. All statements without guarantee. We reserve the right to make improvements to technical progress.
Günther Spelsberg GmbH + Co. KG
Im Gewerbepark 1 · D-58579 Schalksmühle · Telefon: +49 (0) 23 55 / 892-0 · Telefax: +49 (0) 23 55 / 892-299

Technical Data

electrical characteristics

Rated insulation voltage AC:	400 V
Max. conductor cross section:	4 mm²
Protection class:	II
Type of protection:	IP65
UL Type Rating:	not specified

Dimensions

Width:	300 mm
Length:	150 mm
Height:	132 mm
Weight:	1.49 kg

Material characteristics

UV-resistant:	yes
Halogen free:	yes
Flammability class according with UL94:	V2
Glow-wire flammability:	960 °C (EN 60695-2-11)

mechanical properties

Type of fastening:	Wall/ceiling mounting
Impact strength:	IK08
Sealable:	yes
Fastening:	internal fixing points

Ambient conditions

max. relative humidity 25°C:	95 %
max. relative humidity 40°C:	50 %
Min. ambient temperature:	-35 °C
Max. ambient temperature:	80 °C
24h ambient temperature:	60 °C

Ambient conditions

Installation location:	protected outdoor areas

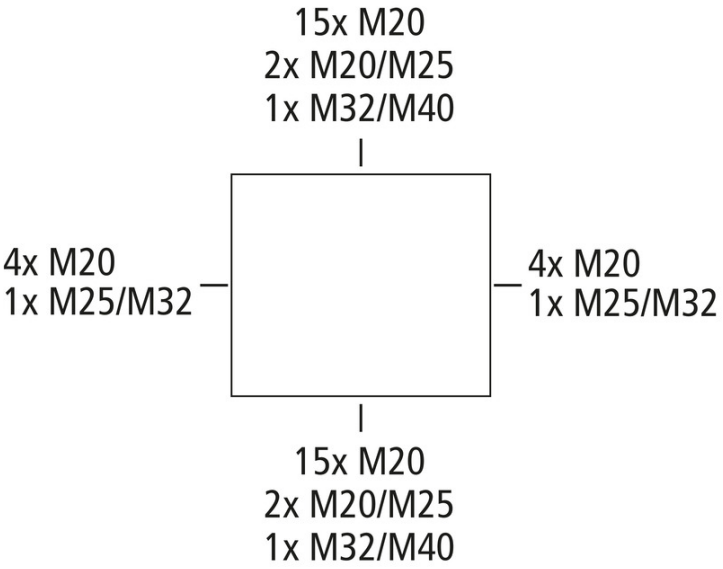
Sales Information

EAN:	4013902885732
ETIM Class:	EC002713
Custom tariff number:	85369095
Minimum order quantity:	1

Material

Base unit material:	Polycarbonate
Cover material:	Polycarbonate, glass-fibre reinforced
Sealing material:	Polyurethane
Cover screw material:	Polyamide, glass-fibre reinforced

Cable gland


15x M20
2x M20/M25
1x M32/M40
4x M20
1x M25/M32
4x M20
1x M25/M32
15x M20
2x M20/M25
1x M32/M40