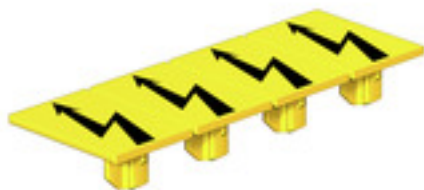


**AAM 10 YE FLASH****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Product image**

Warning covers with a flash symbol provide more safety for man and machine. They are used where external voltage must be indicated within the application.

**General ordering data**

|            |                                     |
|------------|-------------------------------------|
| Version    | Terminal marker, 14 x 10 mm, yellow |
| Order No.  | <a href="#">2635580000</a>          |
| Type       | AAM 10 YE FLASH                     |
| GTIN (EAN) | 4050118674521                       |
| Qty.       | 40 pc(s).                           |

## AAM 10 YE FLASH

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

|            |         |                 |            |
|------------|---------|-----------------|------------|
| Depth      | 5.3 mm  | Depth (inches)  | 0.209 inch |
| Height     | 14 mm   | Height (inches) | 0.551 inch |
| Width      | 10 mm   | Width (inches)  | 0.394 inch |
| Net weight | 0.175 g |                 |            |

## Temperatures

|                             |              |
|-----------------------------|--------------|
| Operating temperature range | -40...100 °C |
|-----------------------------|--------------|

## Material data

|                           |        |        |        |
|---------------------------|--------|--------|--------|
| Material                  | PA 6.6 | Colour | yellow |
| UL 94 flammability rating | V-2    |        |        |

## Rating data IECEx/ATEX

|                             |              |
|-----------------------------|--------------|
| Operating temperature range | -40...100 °C |
|-----------------------------|--------------|

## General

|                                   |        |                                   |        |
|-----------------------------------|--------|-----------------------------------|--------|
| Operating temperature range, max. | 100 °C | Operating temperature range, min. | -40 °C |
|-----------------------------------|--------|-----------------------------------|--------|

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC000761    | ETIM 7.0    | EC000761    |
| ETIM 8.0    | EC000761    | ETIM 9.0    | EC000761    |
| ETIM 10.0   | EC000761    | ECLASS 9.0  | 27-14-11-37 |
| ECLASS 9.1  | 27-14-11-37 | ECLASS 10.0 | 27-14-11-37 |
| ECLASS 11.0 | 27-28-11-01 | ECLASS 12.0 | 27-28-11-01 |
| ECLASS 13.0 | 27-28-11-01 | ECLASS 14.0 | 27-28-11-01 |
| ECLASS 15.0 | 27-28-11-01 |             |             |

## Environmental Product Compliance

|                        |                             |
|------------------------|-----------------------------|
| RoHS Compliance Status | Compliant without exemption |
| REACH SVHC             | No SVHC above 0.1 wt%       |

## Approvals

|      |         |
|------|---------|
| ROHS | Conform |
|------|---------|

## Downloads

|                  |                                          |
|------------------|------------------------------------------|
| Engineering Data | <a href="#">CAD data – STEP</a>          |
| Catalogues       | <a href="#">Catalogues in PDF-format</a> |