


Data sheet

OpDAT connection cable 2x1 OM3
class D_{ca} 100.0 m


Page 1/4

P/N
150J2D0100M
EAN 4251394654157
 2026/09/29
 Version: I

Illustrations

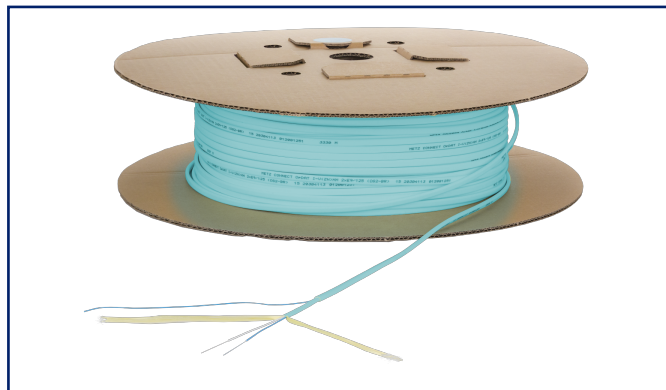

Principle diagram

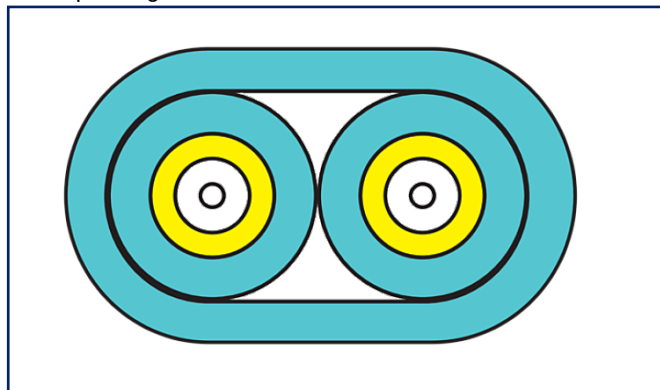

See enlarged drawings at the end of document

Product specification

- connecting cable I-V(ZN)HH
- breakout cable for direct connector assembly for indoor use
- bend insensitive fiber
- cable sheath: LSHF-FR
- UV-resistant, metal-free, longitudinally watertight
- cable construction: two 2 mm separately strain-relieved cables under a common cable jacket
- each cable with 900 µm tight buffer
- tension relief: aramide
- applicable standards: EN 50173-1, ISO 11801 2nd edition, IEC 60794-2, IEC 60794-2-10, EN 187000
- fire behavior: class Dca s1 d1 a1 according to EN 50399 (classification according to EN 13501-6)
- variants fiber types: OS2, OM5, OM4, OM3
- each possible for 20 m as cable ring, 50 m on cardboard drum and 100 m on cardboard drum



Data sheet

Page 2/4

OpDAT connection cable 2x1 OM3 class D_{ca} 100.0 m

P/N

150J2D0100M

EAN 4251394654157

2026/09/29

Version: I

Technical Data

General Data

Fields of application	office areas fiber to the desk interior data center
Transmission technology	Fiber optic
Mode type of the fiber	Multimode
Fiber class	OM3
Cable Type	connection cable
Number of cables/ buffered fibers	2
Number of fibres each cable/ wire	1
Weight	18 kg/km
Jacket color	aqua

Geometric characteristics

Cable length (m)	100 m
Outer diameter cable jacket (mm)	5 mm
Outer diameter cable jacket (inch)	0.197 in.
Core-/ Fiber cladding diameter	2mm / 900 µm

Mechanical data

strain relief	aramide yarn
Tensile strength during operation	120 N
Maximum installation load (max.)	240 N
Maximum installation load	25 mm
Maximum operating bending radius	7.5 mm
Impact resistance	2 Nm
Crush (compressive strength)	4000 N/100 mm
Fire load	320 MJ/km

Materials and material properties

Material - Fiber jacket	LSHF
Halogen free	yes
Metal-free	yes



Data sheet

Page 3/4

OpDAT connection cable 2x1 OM3 class D_{ca} 100.0 m

P/N
150J2D0100M
EAN 4251394654157
2026/09/29
Version: I

Technical Data

Environmental conditions

Temperature (min. - max.)

Temperature - Storage °C	-40 °C - 70 °C
Temperature - Storage °F	-40 °F - 158 °F
Temperature - Operating °C	-40 °C - 70 °C
Temperature - Operating °F	-40 °F - 158 °F
Temperature - Installation °C	-40 °C - 70 °C
Temperature - Installation °F	-40 °F - 158 °F

Standards/Regulations

Common test methods for cables under fire conditions

Fire behaviour - class (EN 50399)



Dca

Classifications

ETIM 7.0	EC001263
ETIM 8.0	EC001263
ETIM 9.0	EC001263
ETIM 10.0	EC001263

Packing details

Type of packaging	1 pc(s) / drum
-------------------	----------------

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way.



Data sheet

Page 4/4

OpDAT connection cable 2x1 OM3
class D_{ca} 100.0 m**P/N**
150J2D0100M
EAN 4251394654157
2026/09/29
Version: I**Illustrations**

Principle diagram

