


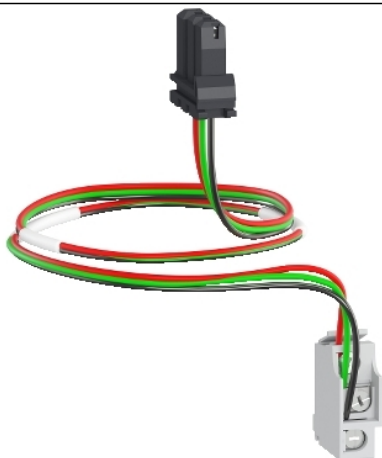

Hoofd

Range	Masterpact
Device short name	SDE[RETURN]PF (SF)[RETURN]OF[RETURN]CH
Product or component type	Hulpcontactblok
Device application	Controle
Bereik compatibiliteit	MASTERPACT MTZ2 automaat MASTERPACT MTZ3 automaat

Complementair

Type hulpcontacten	Standaard
Samenstelling signaleringscontacten	4 NO/NC
Uitschakelvermogen	6 A AC-12 240/380 V AC 50/60 Hz 2 A AC-12 480 V AC 50/60 Hz 0,3 A DC-12 125 V DC 0,15 A DC-12 250 V DC 3 A AC-12 690 V AC 50/60 Hz
Minimale belasting	100 mA bij 24 V
Meegeleverde apparatuur	1 Instructieblad
Type aanbod	Reserveonderdeel

Verpakkingseenheid

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3,000 cm
Package 1 Width	8,000 cm
Package 1 Length	8,000 cm
Package 1 Weight	102,000 g
Unit Type of Package 2	BAG
Number of Units in Package 2	8
Package 2 Height	6,000 cm
Package 2 Width	18,000 cm
Package 2 Length	27,000 cm
Package 2 Weight	2,000 g
Unit Type of Package 3	S03
Number of Units in Package 3	64
Package 3 Height	30,000 cm
Package 3 Width	30,000 cm
Package 3 Length	40,000 cm
Package 3 Weight	12,000 g

Duurzaamheid van het aanbod

EU-richtlijn RoHS	Voldoet  EU-verklaring RoHS
Vrij van giftige zware metalen	Ja
Kwikvrij	Ja
RoHS-regulering China	 RoHS-verklaring China
Informatie over RoHS-vrijstelling	 Ja