

SL713SL LED MICROPRISMATIC COVER

Part number 3122117

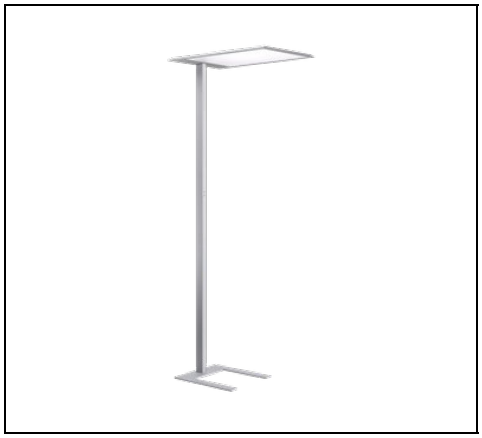

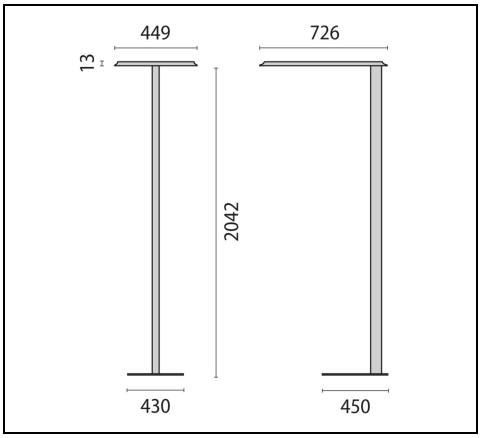

IP 20 | CLASS I | DALI | IR | IR | CE | UKCA

Description

Free-standing (SL) LED luminaire for indoor, comprising:

- Luminaire head and tube made of aluminium profile, base made of sheet steel, powder-coated
- Angle of the lamp head adjustable using a set screw
- Micro-prismatic diffuser for efficient light distribution, glare reduction and high uniformity (MP)
- Direct / indirect light distribution
- LED Sidelight-Technology for a homogenous light distribution over the entire area of the cover
- Colour tolerance according to MacAdam ≤ 3 SDCM
- VDU application suitable acc. to EN 12464-1
- Complete with flexible power cord with plug
- Sensor device available with task oriented PIR detector and daylight control
- Special colour versions available. Consult factory

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com

Product data

ETIM Group:	EG000027	**ETIM Class:**	EC000300

General information

Lampholder:	LED	**Light source:**	LED
Lightsource lumen output [lm]:	15330	**Luminaire lumen output [lm]:**	11090
Luminous efficacy [lm/W]:	118	**CRI:**	80
Colour temperature [K]:	3000	**Colour / Finishing:**	GR-RAL9006 / Grey RAL9006 / Textured
IP degree of protection:	IP20	**Impact resistance / impact energy:**	IK05 0.7J xx3
Protection class:	I	**Optic:**	S/D - Symmetric mainly indirect
Beam angle:	2 x 50°/48°	**Net weight [kg]:**	16.23
Overall length [mm]:	726	**Overall width [mm]:**	449
Overall height [mm]:	2055		

Mechanical features

Shape:	Rectangular	**Housing material:**	Aluminium
Diffuser material:	Plastic	**Glow wire test [°C]:**	650 °C

Electrical features

Voltage type:	AC	**Input voltage [V AC]:**	220/240
Input frequency [Hz]:	220-240V 50/60Hz	**Power factor / COS Φ:**	0.9

Installation

Application area:	Indoor lighting	**Mounting type:**	Free standing
Min. ambient temperature [°C]:	10	**Max. ambient temperature [°C]:**	40

Light features


MacAdam:	3	**Lumen maintenance:**	L80B10@50000h
DFF - Downward Flux Fraction [%]:	33	**UFF - Upward Flux Fraction [%]:**	67
UGR max.:	14.0		

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com

Photometric data

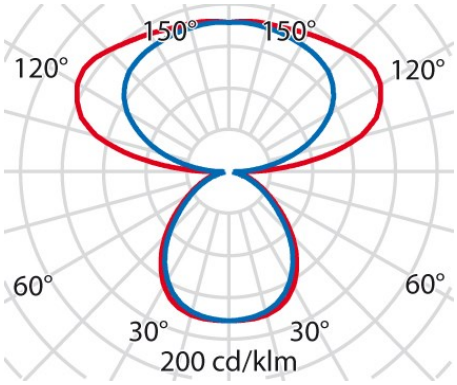


Optional accessories

SL713SL LED



8118000647

Remote control "User" for versions with a sensor function



8118000257

Remote control "Master" for versions with a sensor function

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com