date: 23/10/2026

BLIZ LED RING

Part number 303415

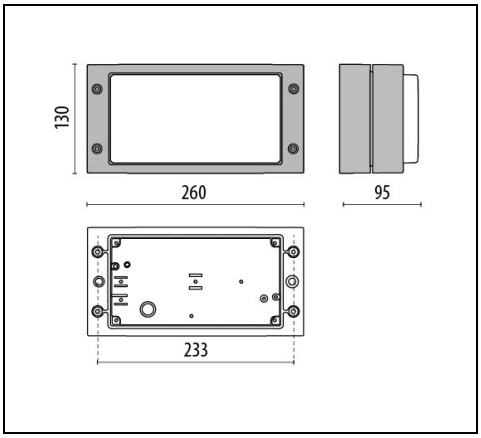

IP 65 | CLASS I

Description

Wall and ceiling mounted luminaire for indoor and outdoor, comprising:

- Die-cast aluminium housing and trim, polyester powder coat finish ISO 9227/12944 - ISO 9223 (C5)
- Glass diffuser
- EPDM sealing gasket
- Stainless steel locking hardware

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com

Product data

ETIM Group:	EG000027	**ETIM Class:**	EC002892

General information

Lampholder:	LED	**Light source:**	LED
Lightsource lumen output [lm]:	1642	**Luminaire lumen output [lm]:**	842
Luminaire wattage [W]:	14 W	**Luminous efficacy [lm/W]:**	60
CRI:	80	**Colour temperature [K]:**	4000
Colour / Finishing:	AN-96 / Anthracite gray / Textured	**IP degree of protection:**	IP65
Impact resistance / impact energy:	IK07 2J xx5	**Protection class:**	I
Optic:	S/EW - Symmetric Extra-Wide	**Net weight [kg]:**	2.23
Overall length [mm]:	260	**Overall width [mm]:**	95
Overall height [mm]:	130		

Mechanical features

Shape:	Rectangular	**Housing material:**	Aluminium
Diffuser material:	Glass		

Electrical features

Voltage type:	AC	**Input voltage [V AC]:**	220/240
Input frequency [Hz]:	50/60	**Power factor / COS Φ:**	>0.9
Inrush current [A/µs]:	5 / 50	**C10 1.5 mm²:**	52
C16 2.5 mm²:	85	**B10 1.5 mm²:**	31
B16 2.5 mm²:	50		

Installation

Application area:	Outdoor lighting	**Mounting type:**	Bulkhead
Min. ambient temperature [°C]:	-10	**Max. ambient temperature [°C]:**	25

Light features

MacAdam:	3	**Lumen maintenance:**	L80B10@50000h
Distribution of light emission:	Direct		

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com

Photometric data

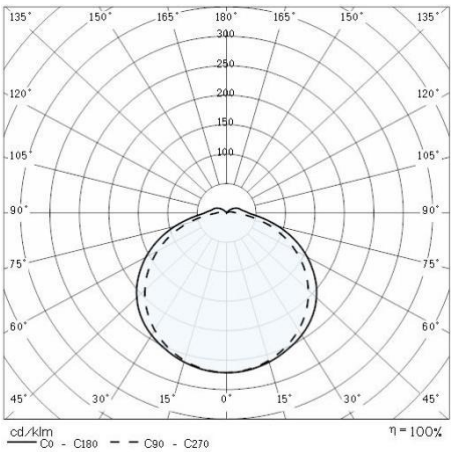

Optional accessories

BLIZ



315028

Post Bliz 530 mm

AN-96 / Anthracite gray



315026

Post Bliz 1030 mm

AN-96 / Anthracite gray

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com