

date: 26/10/2026

FLEXILED SM LV ASYM

Part number 3122047



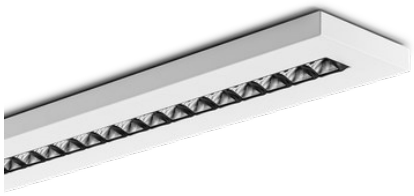

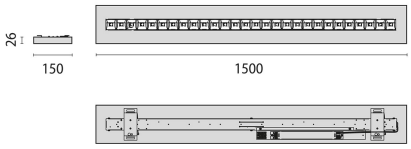

IP 20 | CLASS I | DALI | TOUCH | CE | UKCA

Description

Indoor surface mounted luminaire, comprising:
- Housing made of form-stable 1.0 mm sheet steel
- Impact-resistant, impression-resistant powder coating
- Wallwasher with asymmetrical light distribution ensures optimum panel illumination
- Glare-free light for office applications in accordance with DIN EN 12464-1 (UGR<19 and <3000cd/m² >65°)
- UGR <19 for all luminosities
- Reliable and low-maintenance 50,000h L80B10
- Colour tolerance according to MacAdam ≤ 3 SDCM
- 2 power levels adjustable
- Special colour versions available. Consult factory

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com

Product data

ETIM Group:	EG000027	**ETIM Class:**	EC002892

General information

Lampholder:	LED	**Light source:**	LED
Lightsource lumen output [lm]:	6150	**Luminaire lumen output [lm]:**	5260
Luminaire wattage [W]:	42 W	**Luminous efficacy [lm/W]:**	125
CRI:	80	**Colour temperature [K]:**	4000
Colour / Finishing:	WH-RAL9016 / White RAL9016 / Textured	**IP degree of protection:**	IP20
Impact resistance / impact energy:	IK05 0.7J xx3	**Protection class:**	I
Optic:	A/M - Asymmetric Medium	**Beam angle:**	2 x 38°/37°
Net weight [kg]:	3.902	**Overall length [mm]:**	1500
Overall width [mm]:	150	**Overall height [mm]:**	12

Mechanical features

Shape:	Rectangular	**Glow wire test [°C]:**	650 °C

Electrical features

Voltage type:	AC/DC	**Input voltage [V AC]:**	220/240
Input frequency [Hz]:	220-240V 0/50/60Hz	**Power factor / COS Φ:**	0.9

Installation

Application area:	Indoor lighting	**Mounting type:**	Wall and ceiling surface
Min. ambient temperature [°C]:	10	**Max. ambient temperature [°C]:**	40

Light features


MacAdam:	3	**Lumen maintenance:**	L80B10@50000h
DFF - Downward Flux Fraction [%]:	100	**UFF - Upward Flux Fraction [%]:**	0
UGR max.:	18.0		

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211


info.it@pil.lighting
www.performanceinlighting.com

Photometric data

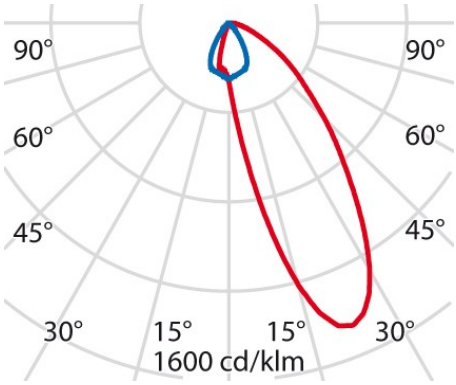

Optional accessories


FLEXILED SM



3122577


Mounting template

GR-94 / Metallic grey



3122584

Casambi module for installation



3122586

Single wireless wall switch

WH-87 / White



3122587

Double wireless wall switch

WH-87 / White



3123707

Suspension set - DALI

WH-RAL9016 / White RAL9016

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com