


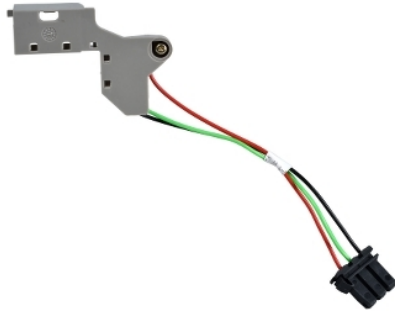

Hoofd

Range	Masterpact
Device short name	SDE
Product or component type	Hulpcontact
Device application	Controle
Bereik compatibiliteit	Masterpact Masterpact MTZ1 automaat

Complementair

Type hulpcontacten	Laag niveau
Samenstelling signaleringscontacten	1 NO/NC
Mounting mode	Uittrekken
Uitschakelvermogen	3 A DC-12 24/48 V DC 0,3 A DC-12 125 V DC 0,15 A DC-12 250 V DC 3 A AC-12 24/48 V AC 50/60 Hz 3 A AC-12 240 V AC 50/60 Hz 3 A AC-12 380 V AC 50/60 Hz
Minimale belasting	2 mA bij 15 V

Verpakkingseenheid

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3,0 cm
Package 1 Width	6,0 cm
Package 1 Length	12,0 cm
Package 1 Weight	45,0 g

Duurzaamheid van het aanbod

REACH-regelgeving	REACH-verklaring
REACH vrij van SVHC	Ja
EU-richtlijn RoHS	Voldoet EU-verklaring RoHS
Vrij van giftige zware metalen	Ja
Kwikkvrij	Ja
RoHS-regulering China	RoHS-verklaring China
Informatie over RoHS-vrijstelling	Ja