date: 22/10/2026

NIKKO+27

Part number 002031

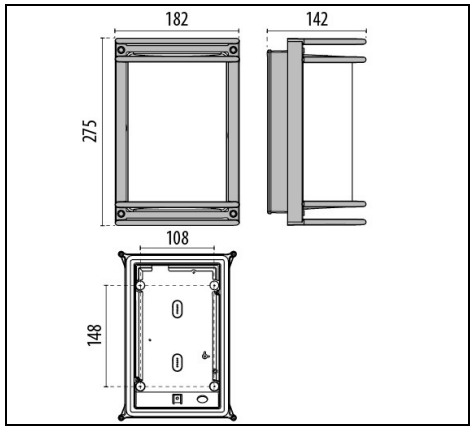

IP 65 | CLASS I | CE | EAC | UKCA

Description

Wall, ceiling and post mounted luminaire for indoor and outdoor, comprising:
- Die-cast aluminium housing and trim, polyester powder coat finish ISO 9227/12944 - ISO 9223 (C5)
- Pressed glass diffuser, internally coated, secured with the ring
- Aluminium reflector and gear tray
- Technopolymer silicone sealing gasket
- Stainless steel locking hardware
- Design by ROBERTO FIORATO
- Design by ROBERTO FIORATO

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com

Product data

ETIM Group:	EG000027	**ETIM Class:**	EC002892

General information

Lampholder:	E27	**Light source:**	Incandescent lamps
Luminaire wattage [W]:	1x100 W	**Colour / Finishing:**	GR-94 / Metallic grey / Textured
IP degree of protection:	IP65	**Impact resistance / impact energy:**	IK06 1J xx3
Protection class:	I	**Optic:**	S/EW - Symmetric Extra-Wide
Net weight [kg]:	2.267	**Overall length [mm]:**	182
Overall width [mm]:	142	**Overall height [mm]:**	275

Mechanical features

Shape:	Rectangular	**Housing material:**	Aluminium
Diffuser material:	Glass		

Installation

Application area:	Outdoor lighting	**Mounting type:**	Bulkhead
Min. ambient temperature [°C]:	-30	**Max. ambient temperature [°C]:**	25

Light features

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com

Photometric data

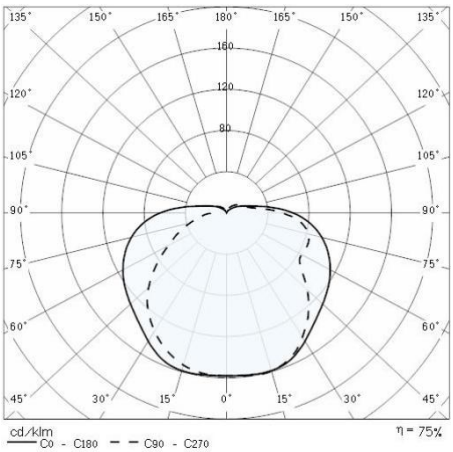

Optional accessories

NIKKO+27



000421

Wall bracket 27

GR-94 / Metallic grey



000425

Post 27 297 mm

GR-94 / Metallic grey



000429

Post 27 833 mm

GR-94 / Metallic grey

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com