

# Data sheet

Page 1/5

## Consolidation Point Prefab 6xLC-D APC OS2

P/N

1503007606-E

EAN 4251122199035


2026/08/31

Version: T

### Illustrations



Dimensional drawing

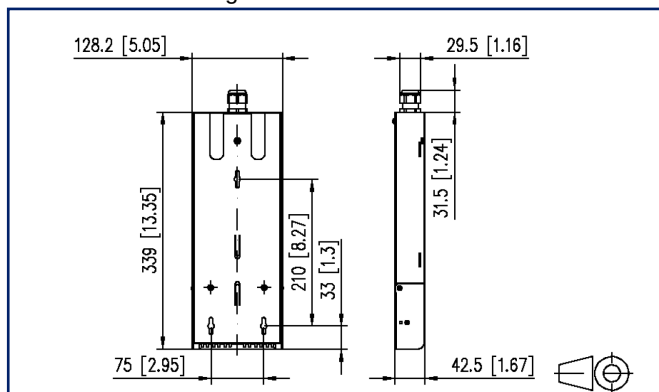

See enlarged drawings at the end of document

### Product specification

- Consolidation Point Prefab with LC-D adapters
- To connect pre-terminated installation cables Prefab with max. 12 fibers
- Wall-mount powder-coated steel-sheet housing, (white, RAL 9010)
- Patch area with swing-open and removable cover with label field
- Possibility for strain relief for patch cord
- Not used cutouts are closed by blind plugs
- Cable management area with separate cover
- Possible cable entry on the back side for one PG16 cable gland
- If necessary order extensions or reductions for the fixing of the Prefabs as separate accessory
- Supplied with material for wall-mounting
- Variants: equipped with 6 LC-D adapters lime green (OM5), violet (OM4), aqua (OM3), blue (OS2) or green (OS2 APC)



## Data sheet

Page 2/5

# Consolidation Point Prefab 6xLC-D APC OS2

P/N

1503007606-E

EAN 4251122199035

2026/08/31

Version: T

## Technical Data

### General Data

|                                               |                                                                                 |
|-----------------------------------------------|---------------------------------------------------------------------------------|
| Fields of application                         | structured building cabling<br>office areas<br>fiber to the desk<br>data center |
| Mechanical measurement according to MICE      | M1                                                                              |
| Ingress measurement according to MICE         | I1                                                                              |
| Climatic measurement according to MICE        | C1                                                                              |
| Electromagnetic measurement according to MICE | E3                                                                              |
| Transmission technology                       | Fiber optic                                                                     |
| Color                                         | green                                                                           |
| Dimensions                                    |                                                                                 |
| Dimension (L x W x H)                         | 128.2 mm x 29.6 mm x 339 mm                                                     |
| Dimension (L x W x H)                         | 5.047 in. x 1.165 in. x 13.346 in.                                              |
| Fiber class                                   | OS2                                                                             |
| Mode type of the fiber                        | Singlemode                                                                      |
| Labeling option                               | label strip / labeling strip                                                    |

### Connections/interfaces

|                                                  |                                         |
|--------------------------------------------------|-----------------------------------------|
| Connector technology interface 1                 | LC-D Couplers                           |
| Connector technology interface 2                 | LC-D Couplers                           |
| Number of ports interface 1                      | 6                                       |
| Number of ports interface 2                      | 6                                       |
| Number of equipped ports interface 1             | 6                                       |
| Number of ports interface 2 equipped             | 6                                       |
| Number of ports with dust protection interface 1 | 6                                       |
| Number of ports with dust protection interface 2 | 6                                       |
| Cable access/outlet                              | possibility for cable entry on the back |

### Mechanical data

|                                |           |
|--------------------------------|-----------|
| Connector type                 | duplex    |
| Life - Number of mating cycles | min. 1000 |
| strain relief                  | yes       |



## Consolidation Point Prefab 6xLC-D APC OS2

P/N

1503007606-E

EAN 4251122199035

2026/08/31

Version: T

### Technical Data

#### Materials and material properties

|                            |                  |
|----------------------------|------------------|
| Material - Housing         | sheet steel      |
| Material - Housing finish  | powder-coated    |
| Material - Sleeve          | ceramic, slotted |
| Material - Coupler housing | Plastics         |
| Halogen free               | yes              |
| RoHS                       | compliant        |

#### Standards/Regulations

|                         |              |
|-------------------------|--------------|
| FO connector interfaces | IEC 61754-20 |
|-------------------------|--------------|

#### Classifications

|           |          |
|-----------|----------|
| ETIM 7.0  | EC001130 |
| ETIM 8.0  | EC001130 |
| ETIM 9.0  | EC001130 |
| ETIM 10.0 | EC001130 |

#### Packing details

|                   |               |
|-------------------|---------------|
| Type of packaging | 1 pc(s) / box |
|-------------------|---------------|

#### Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way.



Data sheet

Page 4/5

## Consolidation Point Prefab 6xLC-D APC OS2

P/N

1503007606-E

EAN 4251122199035

2026/08/31

Version: T

### Accessories

| P/N           | Designation                                |
|---------------|--------------------------------------------|
| 150811P1611-E | Thread reducer PG16 to PG11                |
| 150811P1613-E | Thread reducer PG16 to PG13.5              |
| 150811P1621-E | Thread enlarger PG16 to PG21               |
| 15090401-E    | OpDAT crimp splice protection (12 pieces)  |
| 15090401-I    | OpDAT crimp splice protection (150 pieces) |



## Consolidation Point Prefab 6xLC-D APC OS2

P/N

1503007606-E

EAN 4251122199035

2026/08/31

Version: T

### Illustrations

Dimensional drawing

