


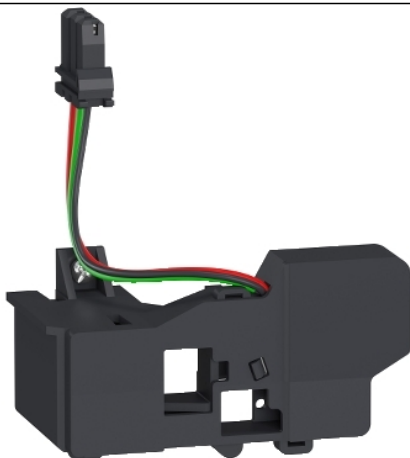

Hoofd

Range	Masterpact
Device short name	SDE
Product or component type	Hulpcontact
Device application	Controle
Bereik compatibiliteit	Masterpact Masterpact MTZ2 automaat Masterpact Masterpact MTZ3 automaat

Complementair

Type hulpcontacten	Laag niveau
Samenstelling signaleringscontacten	1 NO/NC
Mounting mode	Vast
Uitschakelvermogen	3 A DC-12 24/48 V DC 0,3 A DC-12 125 V DC 0,15 A DC-12 250 V DC 3 A AC-12 24/48 V AC 50/60 Hz 3 A AC-12 240 V AC 50/60 Hz 3 A AC-12 380 V AC 50/60 Hz
Minimale belasting	2 mA bij 15 V

Verpakkingseenheid

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5,0 cm
Package 1 Width	11,0 cm
Package 1 Length	11,0 cm
Package 1 Weight	62,0 g

Duurzaamheid van het aanbod

REACH-regelgeving	 REACH-verklaring
REACH vrij van SVHC	Ja
EU-richtlijn RoHS	Voldoet aan vrijstellingen
Kwkvrij	Ja
RoHS-regulering China	 RoHS-verklaring China
Informatie over RoHS-vrijstelling	 Ja