
Busbar terminal

SKL 112

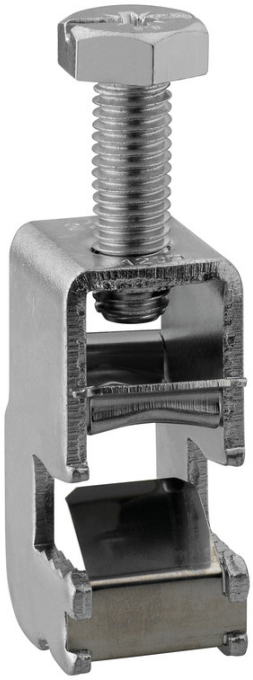

SKL 112

Busbar terminal

Productnumber: 07511201
Dimensions: 23 x 29 x 51 mm

Busbar terminal, for copper rails 12/20/25/30 x 10 mm

for CU-wire 1x (16-120mm²) re/rm/sm/rf+AE, lam. Flat copper 6x16x0.8mm, 10x16x0.8mm

Created at 04.06.2026. All statements without guarantee. We reserve the right to make improvements to technical progress.
Günther Spelsberg GmbH + Co. KG
Im Gewerbepark 1 · D-58579 Schalksmühle · Telefon: +49 (0) 23 55 / 892-0 · Telefax: +49 (0) 23 55 / 892-299

Technical Data

electrical characteristics

Max. conductor cross section:	120 mm²
Rated current:	440 A
Number of poles:	1
shockproof:	No
Connection 1: Connection type:	Screws
Connection 1: Clamping points per pole:	1
Connection 1: Suitable for Cu conductors:	1
Connection 1: Suitable for Al conductors:	1
Connection 1: Connectable conductor cross-section, single-wire (min):	16 mm²
Connection 1: Connectable conductor cross-section, single-wire (max):	120 mm²
Connection 1: Connectable conductor cross-section, stranded (min):	16 mm²
Connection 1:Connectable conductor cross-section, stranded (max):	120 mm²

Dimensions

Width:	23 mm
Length:	29 mm
Height:	51 mm
Weight:	0.107 kg

mechanical properties

Connection 1: Tightening moment:	20 Nm

Sales Information

EAN:	4013902051977
ETIM Class:	EC000001
Custom tariff number:	85369010
Minimum order quantity:	1