


HMIPELCZLEPAZZ

Professional buildtime license, EcoStruxure
Operator Terminal Expert, version 3.x, entity,
100 station, permanent, digital

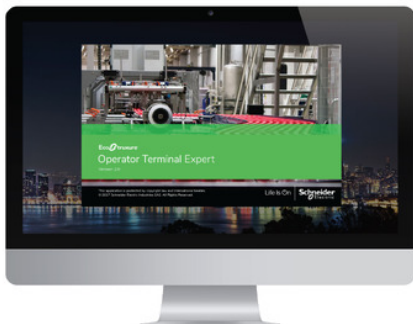

Presentazione

Gamma prodotto	EcoStruxure Operator Terminal Expert
Tipo prodotto	Licenza
Formato	Digital
Tipo software	Professional
Tipo di licenza	Node locked license
Variante	Buildtime
Versione software	V3.5
Operating system requirement	Windows 10 64 bit
Requisiti di sistema	8 GB RAM 30 GB hard-drive space
Lingua	Inglese Italiano Cinese Spagnolo Francese Tedesco Portoghese Coreano

Caratteristiche tecniche

License category	Permanent
Protocollo porta comunicazione	CANopen slave Couzet Automation millenium 3 FBD Emerson Industrial Automation Modbus SIO master Control Techniques Modbus SIO master Emerson Process Management ROC Plus Ethernet Emerson Process Management ROC SIO HTTP IPsec Mitsubishi A series Ethernet Mitsubishi FX series CPU direct Mitsubishi FX series Ethernet Mitsubishi iQ-R/F series Ethernet SLMP client Mitsubishi Q series CPU direct Mitsubishi Q series QnU CPU Ethernet Mitsubishi Q/QnA series serial Modbus Organization Modbus SIO ASCII master Modbus Organization Modbus SIO master Modbus Organization Modbus SIO slave Modbus Organization Modbus TCP master Modbus Organization Modbus TCP slave Omron CS/CJ/CP series host link Omron CS/CJ/CP/NX series Ethernet Omron CS/CJ/NJ/NX series Ethernet/IP OPC UA server Profibus DP slave Rockwell Automation Ethernet/IP Rockwell Automation DF1 Rockwell Automation DH485 Schneider Electric Modbus SIO master Schneider Electric Modbus TCP master Schneider Electric Modbus TCP master via USB Schneider Electric Machine expert network Schneider Electric PacDrive Schneider Electric Uni-Telway Schneider Electric Zelio Logic Siemens Simatic S7 Ethernet Siemens Simatic S7 MPI direct Siemens TIA portal Ethernet
Versione software precedente	V3.4
Funzione software	Professional screen design Simulation Alarms and events Blockly script Convertors Dockable windows interface environment Export with CSV and tab delimiter Import with CSV and tab format Data and operation logging Multi language development Multi language tables Object binding and properties Target binding and properties Project transfer (Ethernet, filesystem, USB cable) Recipes Screens (contents and folders) Security (levels, project, users) Project and application settings System keypad Text script Color themes Variable (arrays, binding, properties, structures) Online and integrated help system OPC UA Server Web server API
Compatibilità gamma	Harmony GTU Harmony GTUX Harmony ST6 Harmony STM6 Harmony STO7 Harmony iPC
Hosting option	On-premise
License size	Entity (100 station)

Processor requirement	Intel core i3 8th generation Intel core i5 8th generation
Risoluzione visualizzazione	1280 x 720 pixels HD

Confezionamenti

Unità di misura confezione 1	PCE
Numero di unità per confezione 1	1
Confezione 1: altezza	1,0 cm
Confezione 1: larghezza	1,0 cm
Confezione 1: profondità	2,0 cm
Confezione 1: peso	2,0 g