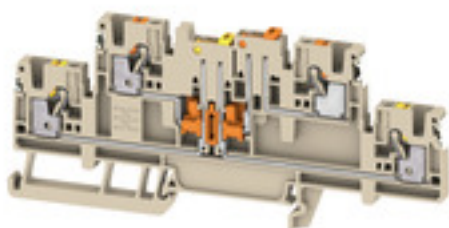


A2T 2.5 DT/DT DL**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**General ordering data**

Version	Disconnect and modular disconnect terminal, PUSH IN, 2.5 mm ² , 400 V, 16 A, beige
Order No.	3111430000
Type	A2T 2.5 DT/DT DL
GTIN (EAN)	4099987190916
Qty.	50 pc(s).

A2T 2.5 DT/DT DL**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Dimensions and weights**

Depth	50.5 mm	Depth (inches)	1.988 inch
Height	115 mm	Height (inches)	4.528 inch
Width	5.1 mm	Width (inches)	0.201 inch
Net weight	20.038 g		

Temperatures

Continuous operating temp., max.	130 °C
----------------------------------	--------

Material data

Material	Wemid	Colour	beige
UL 94 flammability rating	V-0		

System specifications

End cover plate required	Yes	Number of levels	2
Number of clamping points per level	2	Levels cross-connected internally	No
Rail	TS 35		

Conductors for clamping (additional connection)

Connection type, additional connection	PUSH IN
--	---------

Conductors for clamping (rated connection)

Connection cross-section, stranded, max.	2.5 mm ²	Connection cross-section, stranded, min.	0.5 mm ²
Number of connections	4	Type of connection	PUSH IN
Type of connection 2	PUSH IN	Wire connection cross section, finely stranded, max.	2.5 mm ²
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max.	2.5 mm ²	Wire connection cross-section, solid core, max.	2.5 mm ²
Wire connection cross-section, solid core, min.	0.5 mm ²		

General

Rail	TS 35
------	-------

Rating data

Rated cross-section	2.5 mm ²	Rated voltage	400 V
Rated current	16 A		

Classifications

ETIM 6.0	EC000902	ETIM 7.0	EC000902
ETIM 8.0	EC000902	ETIM 9.0	EC000902
ETIM 10.0	EC000902	ECLASS 9.0	27-14-11-26
ECLASS 9.1	27-14-11-26	ECLASS 10.0	27-14-11-26
ECLASS 11.0	27-14-11-26	ECLASS 12.0	27-14-11-26
ECLASS 13.0	27-25-01-09	ECLASS 14.0	27-25-01-09
ECLASS 15.0	27-25-01-09		

A2T 2.5 DT/DT DL

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Downloads

Approval/Certificate/Document of Con-
formity

[CE Declaration of Conformity](#)

Engineering Data

[CAD data – STEP](#)

A2T 2.5 DT/DT DL

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

