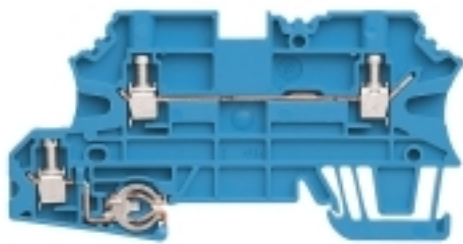


**WMF 2.5 PE BL****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Product image**

Our test disconnect terminal blocks allow you to create all the important converter circuits for measuring current, voltage and power in a safe and sophisticated way. Contour-matched PE terminal blocks complete the portfolio.

**General ordering data**

|            |                                                                                                                                             |
|------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| Version    | Multi-tier modular terminal, Screw connection, blue, 2.5 mm <sup>2</sup> , 800 V, Number of connections: 3, Number of levels: 2, TS 35, V-0 |
| Order No.  | <a href="#">1270050000</a>                                                                                                                  |
| Type       | WMF 2.5 PE BL                                                                                                                               |
| GTIN (EAN) | 4050118097351                                                                                                                               |
| Qty.       | 50 pc(s).                                                                                                                                   |

**WMF 2.5 PE BL****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Dimensions and weights**

|            |         |                 |            |
|------------|---------|-----------------|------------|
| Depth      | 44.5 mm | Depth (inches)  | 1.752 inch |
| Height     | 88 mm   | Height (inches) | 3.465 inch |
| Width      | 5.08 mm | Width (inches)  | 0.2 inch   |
| Net weight | 13.28 g |                 |            |

**Temperatures**

|                                  |        |                                  |        |
|----------------------------------|--------|----------------------------------|--------|
| Continuous operating temp., min. | -50 °C | Continuous operating temp., max. | 120 °C |
|----------------------------------|--------|----------------------------------|--------|

**Material data**

|                           |       |        |      |
|---------------------------|-------|--------|------|
| Material                  | Wemid | Colour | blue |
| UL 94 flammability rating | V-0   |        |      |

**System specifications**

|                                   |     |                                     |       |
|-----------------------------------|-----|-------------------------------------|-------|
| End cover plate required          | Yes | Number of potentials                | 2     |
| Number of levels                  | 2   | Number of clamping points per level | 2     |
| Levels cross-connected internally | No  | Rail                                | TS 35 |
| PEN function                      | No  |                                     |       |

**Additional technical data**

|                          |     |                  |         |
|--------------------------|-----|------------------|---------|
| Explosion-tested version | Yes | Type of mounting | Snap-on |
|--------------------------|-----|------------------|---------|

**CSA rating data**

|                               |                |                               |        |
|-------------------------------|----------------|-------------------------------|--------|
| Certificate No. (CSA)         | 200039-1057876 | Current size B (CSA)          | 26 A   |
| Current size C (CSA)          | 26 A           | Current size D (CSA)          | 5 A    |
| Voltage size B (CSA)          | 600 V          | Voltage size C (CSA)          | 600 V  |
| Voltage size D (CSA)          | 600 V          | Wire cross section max. (CSA) | 12 AWG |
| Wire cross section min. (CSA) | 26 AWG         |                               |        |

**Conductors for clamping (additional connection)**

|                                        |                  |
|----------------------------------------|------------------|
| Connection type, additional connection | Screw connection |
|----------------------------------------|------------------|

## WMF 2.5 PE BL

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Conductors for clamping (rated connection)

|                                                                                         |                     |                                                                                         |                     |
|-----------------------------------------------------------------------------------------|---------------------|-----------------------------------------------------------------------------------------|---------------------|
| Clamping range, max.                                                                    | 4 mm <sup>2</sup>   | Clamping range, min.                                                                    | 0.5 mm <sup>2</sup> |
| Connection cross-section, stranded, max.                                                | 4 mm <sup>2</sup>   | Connection cross-section, stranded, min.                                                | 1.5 mm <sup>2</sup> |
| Connection direction                                                                    | on side             | Number of connections                                                                   | 3                   |
| Stripping length                                                                        | 10 mm               | Type of connection                                                                      | Screw connection    |
| Type of connection 2                                                                    | Screw connection    | Wire connection cross section AWG, max.                                                 | AWG 12              |
| Wire connection cross section AWG, min.                                                 | AWG 26              | Wire connection cross section, finely stranded, max.                                    | 4 mm <sup>2</sup>   |
| Wire connection cross section, finely stranded, min.                                    | 0.5 mm <sup>2</sup> | Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max. | 2.5 mm <sup>2</sup> |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min. | 0.5 mm <sup>2</sup> | Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max. | 2.5 mm <sup>2</sup> |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min. | 0.5 mm <sup>2</sup> | Wire connection cross-section, solid core, max.                                         | 4 mm <sup>2</sup>   |
| Wire connection cross-section, solid core, min.                                         | 0.5 mm <sup>2</sup> |                                                                                         |                     |

## General

|                                         |        |                                         |               |
|-----------------------------------------|--------|-----------------------------------------|---------------|
| Rail                                    | TS 35  | Standards                               | IEC 60947-7-1 |
| Wire connection cross section AWG, max. | AWG 12 | Wire connection cross section AWG, min. | AWG 26        |

## PE rating data

|              |    |
|--------------|----|
| PEN function | No |
|--------------|----|

## Rating data

|                                              |                     |                    |               |
|----------------------------------------------|---------------------|--------------------|---------------|
| Rated cross-section                          | 2.5 mm <sup>2</sup> | Rated voltage      | 800 V         |
| Rated DC voltage                             | 800 V               | Rated current      | 24 A          |
| Current at maximum wires                     | 24 A                | Standards          | IEC 60947-7-1 |
| Volume resistance according to IEC 60947-7-x | 1.33 mΩ             | Pollution severity | 3             |
| Surge voltage category                       | III                 |                    |               |

## UL rating data

|                                            |        |                                            |        |
|--------------------------------------------|--------|--------------------------------------------|--------|
| Certificate No. (cURus)                    | E60693 | Conductor size Factory wiring max. (cURus) | 12 AWG |
| Conductor size Factory wiring min. (cURus) | 26 AWG | Conductor size Field wiring max. (cURus)   | 12 AWG |
| Conductor size Field wiring min. (cURus)   | 26 AWG | Current size B (cURus)                     | 20 A   |
| Current size C (cURus)                     | 20 A   | Current size D (cURus)                     | 5 A    |
| Voltage size B (cURus)                     | 600 V  | Voltage size C (cURus)                     | 600 V  |
| Voltage size D (cURus)                     | 600 V  | Wire cross section max. (cURus)            | 12 AWG |
| Wire cross section min. (cURus)            | 26 AWG |                                            |        |

## WMF 2.5 PE BL

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC000897    | ETIM 7.0    | EC000897    |
| ETIM 8.0    | EC000897    | ETIM 9.0    | EC000897    |
| ETIM 10.0   | EC000897    | ECLASS 9.0  | 27-14-11-20 |
| ECLASS 9.1  | 27-14-11-20 | ECLASS 10.0 | 27-14-11-20 |
| ECLASS 11.0 | 27-14-11-20 | ECLASS 12.0 | 27-14-11-20 |
| ECLASS 13.0 | 27-25-01-02 | ECLASS 14.0 | 27-25-01-02 |
| ECLASS 15.0 | 27-25-01-02 |             |             |

## Environmental Product Compliance

|                        |                             |
|------------------------|-----------------------------|
| RoHS Compliance Status | Compliant without exemption |
| REACH SVHC             | No SVHC above 0.1 wt%       |

## Approvals

Approvals



Approvals MAMID [https://mdcop.weidmueller.com/mediadelivery/rendition/900\\_319222/-T1z1mm-S800/](https://mdcop.weidmueller.com/mediadelivery/rendition/900_319222/-T1z1mm-S800/) [https://mdcop.weidmueller.com/mediadelivery/rendition/900\\_319226/-T1z1mm-S800/](https://mdcop.weidmueller.com/mediadelivery/rendition/900_319226/-T1z1mm-S800/) [https://mdcop.weidmueller.com/mediadelivery/rendition/900\\_319230/-T1z1mm-S800/](https://mdcop.weidmueller.com/mediadelivery/rendition/900_319230/-T1z1mm-S800/) [https://mdcop.weidmueller.com/mediadelivery/rendition/900\\_319235/-T1z1mm-S800/](https://mdcop.weidmueller.com/mediadelivery/rendition/900_319235/-T1z1mm-S800/) [https://mdcop.weidmueller.com/mediadelivery/rendition/900\\_319260/-T1z1mm-S800/](https://mdcop.weidmueller.com/mediadelivery/rendition/900_319260/-T1z1mm-S800/)

|                         |            |
|-------------------------|------------|
| ROHS                    | Conform    |
| UL File Number Search   | UL Website |
| Certificate No. (cURus) | E60693     |

## Downloads


|                                             |                                                                                                                                                                |
|---------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Approval/Certificate/Document of Conformity | <a href="#">CE Declaration of Conformity</a><br><a href="#">UKCA declaration of conformity</a><br><a href="#">Confirmation of Standards EN 45545-2_2020-10</a> |
| Engineering Data                            | <a href="#">CAD data – STEP</a>                                                                                                                                |
| User Documentation                          | <a href="#">Usage of terminals in EXi atmospheres</a><br><a href="#">StorageConditionsTerminalBlocks</a>                                                       |
| Catalogues                                  | <a href="#">Catalogues in PDF-format</a>                                                                                                                       |

### WMF 2.5 PE BL

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Drawings



## WMF 2.5 PE BL

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## Slotted screwdriver



Slotted screwdriver with rounded blade SD DIN 5265, ISO 2380/2, output to DIN 5264, ISO 2380/1. ChromTop tip, SoftFinish grip

## General ordering data

|            |                            |                          |
|------------|----------------------------|--------------------------|
| Type       | SDS 0.6X3.5X100            | Version                  |
| Order No.  | <a href="#">9008330000</a> | Screwdriver, Screwdriver |
| GTIN (EAN) | 4032248056286              |                          |
| Qty.       | 1 pc(s).                   |                          |

## Blank



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

|            |                            |                                                           |
|------------|----------------------------|-----------------------------------------------------------|
| Type       | DEK 5/5 MC NE WS           | Version                                                   |
| Order No.  | <a href="#">1609801044</a> | Dekafix, Terminal marker, 5 x 5 mm, Pitch in mm (P): 5.00 |
| GTIN (EAN) | 4008190397111              | Weidmueller, white                                        |
| Qty.       | 1,000 pc(s).               |                                                           |

## WMF 2.5 PE BL

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## Marker holder



The marker holder offer the possibility of additional mounting of standard markers with a pitch of 5 or 5.1 mm. The angled holders can be optionally snapped together and could be mounted in all standard marking channels of the Klippon® Connect modular terminal blocks. Fitting marker types could be found under the respective accessories of the designation marking holder.

## General ordering data

|            |                            |                            |
|------------|----------------------------|----------------------------|
| Type       | BZT 1 ZA WS 10/5           | Version                    |
| Order No.  | <a href="#">1805520000</a> | Accessories, Marker holder |
| GTIN (EAN) | 4032248270248              |                            |
| Qty.       | 100 pc(s).                 |                            |
| Type       | BZT 1 WS 10/5              | Version                    |
| Order No.  | <a href="#">1805490000</a> | Accessories, Marker holder |
| GTIN (EAN) | 4032248270231              |                            |
| Qty.       | 100 pc(s).                 |                            |

## End plates



To ensure the finger safety and the compliance to the required clearance and creepage distances, an end plate has to be placed at the end of a plug.

## General ordering data

|            |                            |                                                                       |
|------------|----------------------------|-----------------------------------------------------------------------|
| Type       | AP WMF2.5                  | Version                                                               |
| Order No.  | <a href="#">1142990000</a> | End plate for terminals, beige, Height: 87.25 mm, Width: 1.5 mm, V-0, |
| GTIN (EAN) | 4032248925889              | Wemid, Snap-on: Yes                                                   |
| Qty.       | 50 pc(s).                  |                                                                       |

## WMF 2.5 PE BL

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## W-Series



Weidmüller's range of products includes end brackets that guarantee a permanent, reliable mounting on the terminal rail and prevent sliding. Versions with and without screws are available. The end brackets include marking options, also for group markers, and also a test plug holder.

## General ordering data

|            |                            |                                                                |
|------------|----------------------------|----------------------------------------------------------------|
| Type       | WEW 35/2                   | Version                                                        |
| Order No.  | <a href="#">1061200000</a> | End bracket, dark beige, TS 35, HB, Wemid, Width: 8 mm, 100 °C |
| GTIN (EAN) | 4008190030230              |                                                                |
| Qty.       | 50 pc(s).                  |                                                                |

2.5 mm<sup>2</sup>


The plug-in cross-connections feature easy handling and quick installation. This saves a great deal of time during installation in comparison with screwed solutions.

## General ordering data

|            |                            |                                                                       |
|------------|----------------------------|-----------------------------------------------------------------------|
| Type       | ZQV 2.5N/10 RD             | Version                                                               |
| Order No.  | <a href="#">2108910000</a> | Cross-connector (terminal), Plugged, red, 24 A, Number of poles: 10,  |
| GTIN (EAN) | 4050118486018              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 48.7 mm                 |
| Qty.       | 20 pc(s).                  |                                                                       |
| Type       | ZQV 2.5N/9 RD              | Version                                                               |
| Order No.  | <a href="#">2108900000</a> | Cross-connector (terminal), Plugged, red, 24 A, Number of poles: 9,   |
| GTIN (EAN) | 4050118448474              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 43.6 mm                 |
| Qty.       | 20 pc(s).                  |                                                                       |
| Type       | ZQV 2.5N/10 BL             | Version                                                               |
| Order No.  | <a href="#">1527880000</a> | Cross-connector (terminal), Plugged, blue, 24 A, Number of poles: 10, |
| GTIN (EAN) | 4050118448573              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 48.7 mm                 |
| Qty.       | 20 pc(s).                  |                                                                       |
| Type       | ZQV 2.5N/3 BL              | Version                                                               |
| Order No.  | <a href="#">1527770000</a> | Cross-connector (terminal), Plugged, blue, 24 A, Number of poles: 3,  |
| GTIN (EAN) | 4050118448641              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 13 mm                   |
| Qty.       | 60 pc(s).                  |                                                                       |
| Type       | ZQV 2.5N/4 BL              | Version                                                               |
| Order No.  | <a href="#">1527780000</a> | Cross-connector (terminal), Plugged, blue, 24 A, Number of poles: 4,  |
| GTIN (EAN) | 4050118448634              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 18.1 mm                 |
| Qty.       | 60 pc(s).                  |                                                                       |

## WMF 2.5 PE BL

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

|            |                            |                                                                       |
|------------|----------------------------|-----------------------------------------------------------------------|
| Type       | ZQV 2.5N/4 RD              | Version                                                               |
| Order No.  | <a href="#">2108700000</a> | Cross-connector (terminal), Plugged, red, 24 A, Number of poles: 4,   |
| GTIN (EAN) | 4050118448528              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 18.1 mm                 |
| Qty.       | 60 pc(s).                  |                                                                       |
| Type       | ZQV 2.5N/5 RD              | Version                                                               |
| Order No.  | <a href="#">2108710000</a> | Cross-connector (terminal), Plugged, red, 24 A, Number of poles: 5,   |
| GTIN (EAN) | 4050118448511              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 23.2 mm                 |
| Qty.       | 20 pc(s).                  |                                                                       |
| Type       | ZQV 2.5N/8 RD              | Version                                                               |
| Order No.  | <a href="#">2108870000</a> | Cross-connector (terminal), Plugged, red, 24 A, Number of poles: 8,   |
| GTIN (EAN) | 4050118448481              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 38.5 mm                 |
| Qty.       | 20 pc(s).                  |                                                                       |
| Type       | ZQV 2.5N/5                 | Version                                                               |
| Order No.  | <a href="#">1527620000</a> | Cross-connector (terminal), Plugged, orange, 24 A, Number of poles:   |
| GTIN (EAN) | 4050118448436              | 5, Pitch in mm (P): 5.10, Insulated: Yes, Width: 23.2 mm              |
| Qty.       | 20 pc(s).                  |                                                                       |
| Type       | ZQV 2.5N/20 RD             | Version                                                               |
| Order No.  | <a href="#">2108920000</a> | Cross-connector (terminal), Plugged, red, 24 A, Number of poles: 20,  |
| GTIN (EAN) | 4050118485899              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 102 mm                  |
| Qty.       | 20 pc(s).                  |                                                                       |
| Type       | ZQV 2.5N/8                 | Version                                                               |
| Order No.  | <a href="#">1527670000</a> | Cross-connector (terminal), Plugged, orange, 24 A, Number of poles:   |
| GTIN (EAN) | 4050118448405              | 8, Pitch in mm (P): 5.10, Insulated: Yes, Width: 38.5 mm              |
| Qty.       | 20 pc(s).                  |                                                                       |
| Type       | ZQV 2.5N/7 RD              | Version                                                               |
| Order No.  | <a href="#">2108810000</a> | Cross-connector (terminal), Plugged, red, 24 A, Number of poles: 7,   |
| GTIN (EAN) | 4050118448498              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 33.4 mm                 |
| Qty.       | 20 pc(s).                  |                                                                       |
| Type       | ZQV 2.5N/3 RD              | Version                                                               |
| Order No.  | <a href="#">2108690000</a> | Cross-connector (terminal), Plugged, red, 24 A, Number of poles: 3,   |
| GTIN (EAN) | 4050118448535              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 13 mm                   |
| Qty.       | 60 pc(s).                  |                                                                       |
| Type       | ZQV 2.5N/20 BL             | Version                                                               |
| Order No.  | <a href="#">1527890000</a> | Cross-connector (terminal), Plugged, blue, 24 A, Number of poles: 20, |
| GTIN (EAN) | 4050118448566              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 102 mm                  |
| Qty.       | 20 pc(s).                  |                                                                       |
| Type       | ZQV 2.5N/8 BL              | Version                                                               |
| Order No.  | <a href="#">1527840000</a> | Cross-connector (terminal), Plugged, blue, 24 A, Number of poles: 8,  |
| GTIN (EAN) | 4050118448597              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 38.5 mm                 |
| Qty.       | 20 pc(s).                  |                                                                       |
| Type       | ZQV 2.5N/7 BL              | Version                                                               |
| Order No.  | <a href="#">1527830000</a> | Cross-connector (terminal), Plugged, blue, 24 A, Number of poles: 7,  |
| GTIN (EAN) | 4050118448603              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 33.4 mm                 |
| Qty.       | 20 pc(s).                  |                                                                       |
| Type       | ZQV 2.5N/7                 | Version                                                               |
| Order No.  | <a href="#">1527640000</a> | Cross-connector (terminal), Plugged, orange, 24 A, Number of poles:   |
| GTIN (EAN) | 4050118448412              | 7, Pitch in mm (P): 5.10, Insulated: Yes, Width: 33.4 mm              |
| Qty.       | 20 pc(s).                  |                                                                       |
| Type       | ZQV 2.5N/50                | Version                                                               |
| Order No.  | <a href="#">1527730000</a> | Cross-connector (terminal), Plugged, orange, 24 A, Number of poles:   |
| GTIN (EAN) | 4050118411362              | 50, Pitch in mm (P): 5.10, Insulated: Yes, Width: 255 mm              |
| Qty.       | 5 pc(s).                   |                                                                       |

## WMF 2.5 PE BL

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

|            |                            |                                                                      |
|------------|----------------------------|----------------------------------------------------------------------|
| Type       | ZQV 2.5N/6 RD              | Version                                                              |
| Order No.  | <a href="#">2108720000</a> | Cross-connector (terminal), Plugged, red, 24 A, Number of poles: 6,  |
| GTIN (EAN) | 4050118448504              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 28.3 mm                |
| Qty.       | 20 pc(s).                  |                                                                      |
| Type       | ZQV 2.5N/9 BL              | Version                                                              |
| Order No.  | <a href="#">1527870000</a> | Cross-connector (terminal), Plugged, blue, 24 A, Number of poles: 9, |
| GTIN (EAN) | 4050118448580              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 43.6 mm                |
| Qty.       | 20 pc(s).                  |                                                                      |
| Type       | ZQV 2.5N/20                | Version                                                              |
| Order No.  | <a href="#">1527720000</a> | Cross-connector (terminal), Plugged, orange, 24 A, Number of poles:  |
| GTIN (EAN) | 4050118447972              | 20, Pitch in mm (P): 5.10, Insulated: Yes, Width: 102 mm             |
| Qty.       | 20 pc(s).                  |                                                                      |
| Type       | ZQV 2.5N/6 BL              | Version                                                              |
| Order No.  | <a href="#">1527820000</a> | Cross-connector (terminal), Plugged, blue, 24 A, Number of poles: 6, |
| GTIN (EAN) | 4050118448610              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 28.3 mm                |
| Qty.       | 20 pc(s).                  |                                                                      |
| Type       | ZQV 2.5N/5 BL              | Version                                                              |
| Order No.  | <a href="#">1527790000</a> | Cross-connector (terminal), Plugged, blue, 24 A, Number of poles: 5, |
| GTIN (EAN) | 4050118448627              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 23.2 mm                |
| Qty.       | 20 pc(s).                  |                                                                      |
| Type       | ZQV 2.5N/9                 | Version                                                              |
| Order No.  | <a href="#">1527680000</a> | Cross-connector (terminal), Plugged, orange, 24 A, Number of poles:  |
| GTIN (EAN) | 4050118447996              | 9, Pitch in mm (P): 5.10, Insulated: Yes, Width: 43.6 mm             |
| Qty.       | 20 pc(s).                  |                                                                      |
| Type       | ZQV 2.5N/50 RD             | Version                                                              |
| Order No.  | <a href="#">2109000000</a> | Cross-connector (terminal), Plugged, red, 24 A, Number of poles: 50, |
| GTIN (EAN) | 4050118486001              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 255 mm                 |
| Qty.       | 5 pc(s).                   |                                                                      |
| Type       | ZQV 2.5N/10                | Version                                                              |
| Order No.  | <a href="#">1527690000</a> | Cross-connector (terminal), Plugged, orange, 24 A, Number of poles:  |
| GTIN (EAN) | 4050118447989              | 10, Pitch in mm (P): 5.10, Insulated: Yes, Width: 48.7 mm            |
| Qty.       | 20 pc(s).                  |                                                                      |
| Type       | ZQV 2.5N/4                 | Version                                                              |
| Order No.  | <a href="#">1527590000</a> | Cross-connector (terminal), Plugged, orange, 24 A, Number of poles:  |
| GTIN (EAN) | 4050118448443              | 4, Pitch in mm (P): 5.10, Insulated: Yes, Width: 18.1 mm             |
| Qty.       | 60 pc(s).                  |                                                                      |
| Type       | ZQV 2.5N/2 BL              | Version                                                              |
| Order No.  | <a href="#">1527740000</a> | Cross-connector (terminal), Plugged, blue, 24 A, Number of poles: 2, |
| GTIN (EAN) | 4050118448658              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 7.9 mm                 |
| Qty.       | 60 pc(s).                  |                                                                      |
| Type       | ZQV 2.5N/2                 | Version                                                              |
| Order No.  | <a href="#">1527540000</a> | Cross-connector (terminal), Plugged, orange, 24 A, Number of poles:  |
| GTIN (EAN) | 4050118448467              | 2, Pitch in mm (P): 5.10, Insulated: Yes, Width: 7.9 mm              |
| Qty.       | 60 pc(s).                  |                                                                      |
| Type       | ZQV 2.5N/3                 | Version                                                              |
| Order No.  | <a href="#">1527570000</a> | Cross-connector (terminal), Plugged, orange, 24 A, Number of poles:  |
| GTIN (EAN) | 4050118448450              | 3, Pitch in mm (P): 5.10, Insulated: Yes, Width: 13 mm               |
| Qty.       | 60 pc(s).                  |                                                                      |
| Type       | ZQV 2.5N/2 RD              | Version                                                              |
| Order No.  | <a href="#">2108470000</a> | Cross-connector (terminal), Plugged, red, 24 A, Number of poles: 2,  |
| GTIN (EAN) | 4050118448542              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 7.9 mm                 |
| Qty.       | 60 pc(s).                  |                                                                      |

Creation date May 11, 2025 5:31:05 PM CEST

Catalogue status 26.04.2025 / We reserve the right to make technical changes.

10

## WMF 2.5 PE BL

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

|            |                            |                                                                       |
|------------|----------------------------|-----------------------------------------------------------------------|
| Type       | ZQV 2.5N/50 BL             | Version                                                               |
| Order No.  | <a href="#">1527920000</a> | Cross-connector (terminal), Plugged, blue, 24 A, Number of poles: 50, |
| GTIN (EAN) | 4050118448559              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 255 mm                  |
| Qty.       | 5 pc(s).                   |                                                                       |
| Type       | ZQV 2.5N/6                 | Version                                                               |
| Order No.  | <a href="#">1527630000</a> | Cross-connector (terminal), Plugged, orange, 24 A, Number of poles:   |
| GTIN (EAN) | 4050118448429              | 6, Pitch in mm (P): 5.10, Insulated: Yes, Width: 28.3 mm              |
| Qty.       | 20 pc(s).                  |                                                                       |

## Blank



WS markers are the perfect match for the W-series connectors. Thanks to their system compatibility, the WS tags can also be used with the I-series and the Z-series. The large marking surfaces do not only permit long character strings but also multi-line text. WS markers are ideal for labels with long, customised character strings. Thanks to the proven MultiCard format, printing with PrintJet CONNECT oder/or Plotter is possible.

- Can be fitted in strips or individually
- Markers in proven MultiCard format

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

|            |                            |                                                                    |
|------------|----------------------------|--------------------------------------------------------------------|
| Type       | WS 10/5 M MC NE WS         | Version                                                            |
| Order No.  | <a href="#">1792000000</a> | WS, Terminal marker, 10 x 5 mm, Pitch in mm (P): 5.00 Weidmueller, |
| GTIN (EAN) | 4032248223862              | Allen-Bradley, white                                               |
| Qty.       | 720 pc(s).                 |                                                                    |