

**HDC 32A TOBU 1PG21G****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**IP65**

The special die-cast alloy and the multi-layered surface sealing provide complete protection for the HDC housings.

The cleverly designed interlock system is manufactured from stainless steel. This guarantees a long lifespan with high resistance to corrosion and impact.

The housing interlock system provides integrated safety. Our unique, patented spring system provides the housing interlock with a secure grip and prevents accidental opening.

The laser marking allows for easy and quick identification. Each housing is permanently labelled with a laser marking so that each product can be quickly designated and positioned.

Weidmüller RockStar® IP 65 / NEMA Type 4X housings - your first choice for industrial housings with IP 65 protection.

**General ordering data**

|            |                                                                                                                                                                                       |
|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Version    | HDC enclosures, Size: 7, Protection degree: IP65 (in plugged condition), Cable entry from top, Plug housing, Side-locking clamp on lower side, Standard, Size of cable entries: PG 21 |
| Order No.  | <a href="#">1665790000</a>                                                                                                                                                            |
| Type       | HDC 32A TOBU 1PG21G                                                                                                                                                                   |
| GTIN (EAN) | 4008190422813                                                                                                                                                                         |
| Qty.       | 1 pc(s).                                                                                                                                                                              |

## HDC 32A TOBU 1PG21G

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

|            |         |                 |            |
|------------|---------|-----------------|------------|
| Depth      | 82 mm   | Depth (inches)  | 3.228 inch |
| Height     | 75 mm   | Height (inches) | 2.953 inch |
| Width      | 71.5 mm | Width (inches)  | 2.815 inch |
| Net weight | 255 g   |                 |            |

## Temperatures

|                   |                   |
|-------------------|-------------------|
| Limit temperature | -40 °C ... 125 °C |
|-------------------|-------------------|

## Dimensions

|                      |           |                     |       |
|----------------------|-----------|---------------------|-------|
| Cable entry          | w. thread | Height of housing B | 77 mm |
| Total length housing | 82 mm     | Width housing C     | 56 mm |

## General data

|                             |                             |                       |                             |
|-----------------------------|-----------------------------|-----------------------|-----------------------------|
| EMC housings                | No                          | Housing main material | diecast aluminium           |
| Material of locking element | Stainless steel, rust-proof | Protection degree     | IP65 (in plugged condition) |
| Surface finish              | Powder coating              | Tightening torque     | 1.2 Nm                      |

## Version

|                              |                                  |                                |                                    |
|------------------------------|----------------------------------|--------------------------------|------------------------------------|
| BG                           | 7                                | Cable entry                    | w. thread                          |
| Clamp version                | Side-locking clamp               | Colour (RAL)                   | RAL 7035                           |
| Design                       | Standard                         | Design of housing              | Cable entry from top, Plug housing |
| Design of locking system     | Side-locking clamp on lower side | Internal thread                | PG 21                              |
| Number of cable entry on top | 1                                | Number of cable entry sideways | 0                                  |
| Size                         | 7                                | Size of cable entries          | PG 21                              |
| Suitable for ModuPlug®       | No                               | Tightening torque              | 1.2 Nm                             |
| Top part/bottom part/lid     | upper part                       | Type                           | Plug                               |

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC000437    | ETIM 7.0    | EC000437    |
| ETIM 8.0    | EC000437    | ETIM 9.0    | EC000437    |
| ETIM 10.0   | EC000437    | ECLASS 9.0  | 27-44-02-02 |
| ECLASS 9.1  | 27-44-02-02 | ECLASS 10.0 | 27-44-02-02 |
| ECLASS 11.0 | 27-44-02-02 | ECLASS 12.0 | 27-44-02-02 |
| ECLASS 13.0 | 27-44-02-02 | ECLASS 14.0 | 27-44-02-02 |
| ECLASS 15.0 | 27-44-02-02 |             |             |

|                     |                         |
|---------------------|-------------------------|
| Substance           | Acetone                 |
| Chemical resistance | Conditionally resistant |
| Substance           | Drilling oil            |
| Chemical resistance | Resistant               |
| Substance           | Diesel                  |
| Chemical resistance | Resistant               |
| Substance           | Ethyl alcohol           |
| Chemical resistance | Resistant               |

## HDC 32A TOBU 1PG21G

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

|                     |                         |
|---------------------|-------------------------|
| Substance           | Transmission oil        |
| Chemical resistance | Resistant               |
| Substance           | Hydraulic oil           |
| Chemical resistance | Resistant               |
| Substance           | Coolant                 |
| Chemical resistance | Resistant               |
| Substance           | Petroleum benzine       |
| Chemical resistance | Resistant               |
| Substance           | Sweat                   |
| Chemical resistance | Resistant               |
| Substance           | Premium gasoline        |
| Chemical resistance | Conditionally resistant |
| Substance           | Water                   |
| Chemical resistance | Resistant               |
| Substance           | UV                      |
| Chemical resistance | Unstable                |
| Substance           | Ozone                   |
| Chemical resistance | Unstable                |

## Environmental Product Compliance

|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RoHS Compliance Status | Compliant without exemption                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| REACH SVHC             | No SVHC above 0.1 wt%                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Chemical resistance    | de.myview.objectmodel.impl.BlockImpl@1db6495 de.myview.objectmodel.impl.BlockImpl@5021882b de.myview.objectmodel.impl.BlockImpl@55f93d4 de.myview.objectmodel.impl.BlockImpl@a99806f de.myview.objectmodel.impl.BlockImpl@503ca265 de.myview.objectmodel.impl.BlockImpl@c800899 de.myview.objectmodel.impl.BlockImpl@75b8fbec de.myview.objectmodel.impl.BlockImpl@336487ce de.myview.objectmodel.impl.BlockImpl@67e344d de.myview.objectmodel.impl.BlockImpl@ab620db de.myview.objectmodel.impl.BlockImpl@38e3dde8 de.myview.objectmodel.impl.BlockImpl@2f2e67cd de.myview.objectmodel.impl.BlockImpl@5885e239 |

## Approvals

Approvals



|                         |                                                                                                                                                                                                                                                                                                                                                         |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Approvals MAMID         | <a href="https://mdcop.weidmueller.com/mediadelivery/rendition/900_319222/-T1z1mm-S800/">https://mdcop.weidmueller.com/mediadelivery/rendition/900_319222/-T1z1mm-S800/</a> <a href="https://mdcop.weidmueller.com/mediadelivery/rendition/900_319230/-T1z1mm-S800/">https://mdcop.weidmueller.com/mediadelivery/rendition/900_319230/-T1z1mm-S800/</a> |
| ROHS                    | Conform                                                                                                                                                                                                                                                                                                                                                 |
| UL File Number Search   | UL Website                                                                                                                                                                                                                                                                                                                                              |
| Certificate No. (cURus) | E92202                                                                                                                                                                                                                                                                                                                                                  |

### HDC 32A TOBU 1PG21G

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Technical data

### Downloads

Approval/Certificate/Document of Conformity

[Manufacturer's declaration](#)

Engineering Data

[CAD data – STEP](#)

Product Change Notification

[20220214 Technical change to HDC housings](#)

[20220214 Technische Änderung bei HDC-Gehäusen](#)

Technical Documentation

[1665790000 HDC\\_32A\\_TOBU\\_1PG21G\\_STP\\_Blatt\\_1.pdf](#)

Catalogues

[Catalogues in PDF-format](#)

Brochures

[FL FIELDWIRING EN](#)


[FL FIELDWIRING EN](#)

### HDC 32A TOBU 1PG21G

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Drawings

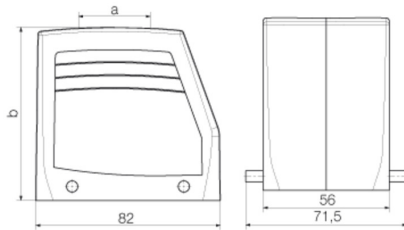

**HDC 32A TOBU 1PG21G****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Accessories****Cover**

The special die-cast alloy and the multi-layered surface sealing provide complete protection for the HDC housings.

The cleverly designed interlock system is manufactured from stainless steel. This guarantees a long lifespan with high resistance to corrosion and impact.

The housing interlock system provides integrated safety. Our unique, patented spring system provides the housing interlock with a secure grip and prevents accidental opening.

The laser marking allows for easy and quick identification. Each housing is permanently labelled with a laser marking so that each product can be quickly designated and positioned.

Weidmüller RockStar® IP 65 / NEMA Type 4X housings - your first choice for industrial housings with IP 65 protection.

**General ordering data**

|            |                            |                                                                                                                                                      |
|------------|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| Type       | HDC 32A DMDQ 2QB           | Version                                                                                                                                              |
| Order No.  | <a href="#">1665930000</a> | HDC enclosures, Size: 7, Protection degree: IP65 (in plugged condition), Cover for upper part of housing, Side-locking clamp on lower side, Standard |
| GTIN (EAN) | 4008190422967              |                                                                                                                                                      |
| Qty.       | 1 pc(s).                   |                                                                                                                                                      |