MIMIK 10 POST 1000 HU

Part number 3112998

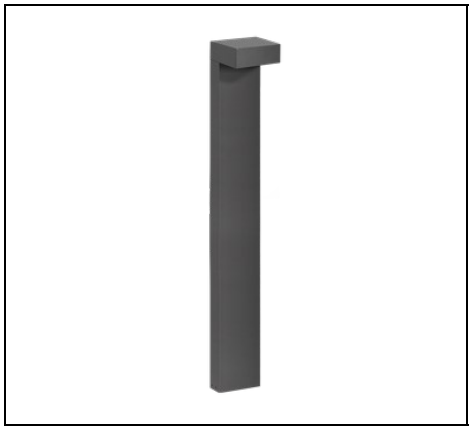

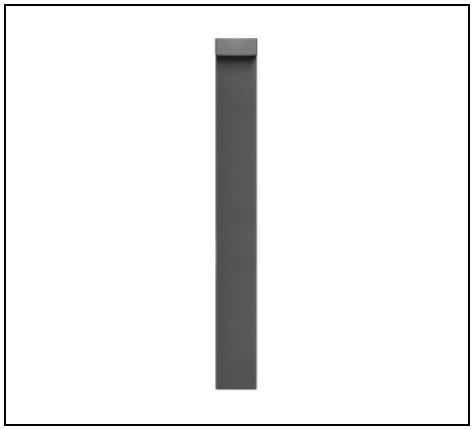

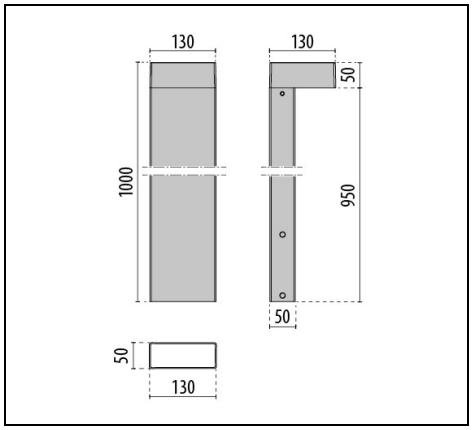

IP 65 · CLASS I · QUICK · FULL CUT OFF · ULR<1 · CIEn°3>95 · CE · EAC · UKCA

Description

Landscaping LED bollard, comprising:
- Die-cast aluminium housing, polyester powder coat finish ISO 9227/12944 - ISO 9223 (C5)
- Toughened, glass diffuser, silk-screened on the inside
- Satin finish pure aluminium reflector (Al 99.98)
- Anti-ageing custom moulded silicone sealing gasket(s)
- Built-in driver
- Stainless steel locking hardware
- Extruded aluminium pole polyester powder coat finish ISO 9227/19244 - ISO 9223 (C5)
- IP-rated external socket-plug fast connector (QUICK), complete with factory pre-wired cable
- HU (Heavy Use) versions must be completed with specific, robust stainless steel fixing bases, available as accessories
- Glare control and upward light pollution laws compliant (0% ULOR rating)
- Openable and maintainable luminaire (future-proof)

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com

Product data

ETIM Group:	EG000027	**ETIM Class:**	EC000301

General information

Lampholder:	LED	**Light source:**	LED
Lightsource lumen output [lm]:	1076	**Luminaire lumen output [lm]:**	780
Luminaire wattage [W]:	10 W	**Luminous efficacy [lm/W]:**	78
CRI:	80	**Colour temperature [K]:**	4000
Colour / Finishing:	AN-96 / Anthracite gray / Textured	**IP degree of protection:**	IP65
Impact resistance / impact energy:	IK08 5J xx5	**Protection class:**	I
Optic:	CP/T3 - Cycle/Pedestrian Type III	**Net weight [kg]:**	3.008
Overall length [mm]:	130	**Overall width [mm]:**	130
Overall height [mm]:	1003		

Mechanical features

Shape:	Rectangular	**Housing material:**	Aluminium
Diffuser material:	Glass		

Electrical features

Voltage type:	AC	**Input voltage [V AC]:**	220/240
Input frequency [Hz]:	50/60	**Power factor / COS Φ:**	>0.9
Inrush current [A/µs]:	5 / 50	**C10 1.5 mm²:**	52
C16 2.5 mm²:	85	**B10 1.5 mm²:**	31
B16 2.5 mm²:	50		

Installation

Application area:	Outdoor lighting	**Mounting type:**	Garden post
Min. ambient temperature [°C]:	-20	**Max. ambient temperature [°C]:**	35

Light features

MacAdam:	5	**Lumen maintenance:**	L80B10@60000h
Distribution of light emission:	Direct	**Luminous Intensity Class:**	G*3
Zero light pollution (ULR = 0%):		**IPEA* (road lighting):**	B
IPEA* (large areas, roundabouts):	B	**IPEA* (cycle-pedestrian):**	B
IPEA* (green areas):	B	**IPEA* (historic city centers):**	B

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com

Photometric data

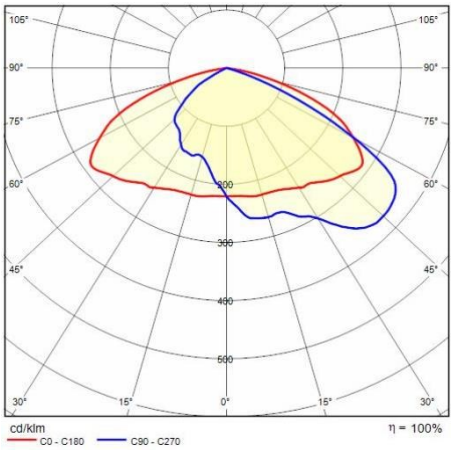

Optional accessories

MIMIK 10 POST HU

3112992

Plate HU MIMIK10 POST

AN-96 / Anthracite gray

MIMIK 10 POST FR



3112994

Plate FR MIMIK10 POST

AN-96 / Anthracite gray

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com