
# SL629+ PL S/C

## Part number LTX13B4DG801





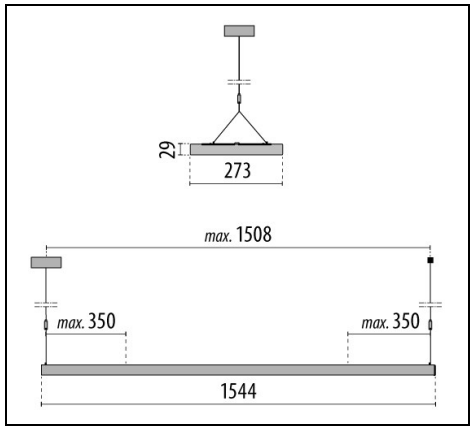


IP 20 | CLASS I | MULTI WHITE | DALI | TOUCH | CE | UK CA | EN

### Description

Suspended, LED luminaire for indoor, comprising:
- Steel sheet housing, die-cast aluminium end caps, polyester powder coat finish
- Prismatic diffuser for efficient light distribution, glare reduction and a high level of uniformity
- FUTURE-PROOF = replaceable light engine and components
- Maintenance and installation-friendly design (complies with the EU Eco-Design Directive 2019/2020)
- LED Sidelight-Technology for a homogenous light distribution over the entire area of the cover
- Direct / indirect light distribution
- Glare-free light for office applications in accordance with DIN EN 12464-1 (UGR<19 and <3000cd/m$^2$ >65°)
- Flexible power level setting via DIP switch (50 / 75 / 100%)
- Dip switch for LED CCT control at 3000K or 4000K, field adjustable
- Cord suspensions, adjustable in the moulding
- Suitable for sustainable 1:1 replacement - no extensive ceiling work necessary
- Colour tolerance according to MacAdam ≤ 3 SDCM
- Barrier-free light
- Maximum values for efficiency and service life for the allocation of subsidies and building certification (e.g. BEG subsidy, LEED, BREEAM)
- Produced in Germany - with a focus on quality, short delivery routes and low environmental impact
- Complete with steel suspension cable (1.5 m), transparent power cable and canopy
- Effortless upgrade: sensor modules can be integrated at any time via plug-and-play
- Casambi control available as an accessory
- Through-wiring designed
- Special colour versions available. Consult factory

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
**PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy**
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

**info.it@pil.lighting**
www.performanceinlighting.com

## Product data

| | | | |
|---|---|---|---|
| **ETIM Group:** | EG000027 | **ETIM Class:** | EC001743 |

## General information

| | | | |
|---|---|---|---|
| **Lampholder:** | LED | **Light source:** | LED |
| **Lightsource lumen output [lm]:** | 12500 | **Luminaire lumen output [lm]:** | 9000 |
| **Luminous efficacy [lm/W]:** | 134 | **CRI:** | 80 |
| **Colour temperature [K]:** | 3000/4000 | **Colour / Finishing:** | GR-RAL9006 / Grey RAL9006 / Textured |
| **IP degree of protection:** | IP20 | **Impact resistance / impact energy:** | IK05 0.7J xx3 |
| **Protection class:** | I | **Optic:** | S/C - Symmetric direct-indirect |
| **Beam angle:** | 2 x 41°/50° | **Net weight [kg]:** | 7.67 |
| **Overall length [mm]:** | 1544 | **Overall width [mm]:** | 275 |
| **Overall height [mm]:** | 29 | | |

## Mechanical features

| | | | |
|---|---|---|---|
| **Shape:** | Rectangular | **Diffuser material:** | Transparent plastic |
| **Glow wire test [°C]:** | 650 °C | | |

## Electrical features

| | | | |
|---|---|---|---|
| **Voltage type:** | AC/DC | **Input voltage [V AC]:** | 200/240 |
| **Input frequency [Hz]:** | 220-240V 0/50/60Hz | **Power factor / COS Φ:** | >0.9 |

## Installation

| | | | |
|---|---|---|---|
| **Application area:** | Indoor lighting | **Mounting type:** | Suspended |
| **Min. ambient temperature [°C]:** | 10 | **Max. ambient temperature [°C]:** | 40 |

## Light features


| | | | |
|---|---|---|---|
| **MacAdam:** | 3 | **Lumen maintenance:** | L80B10@50000h |
| **Distribution of light emission:** | Direct/Indirect | **DFF - Downward Flux Fraction [%]:** | 37 |
| **UFF - Upward Flux Fraction [%]:** | 63 | **UGR max.:** | 15.0 |

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
**PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy**
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211


**info.it@pil.lighting**
www.performanceinlighting.com

## Photometric data

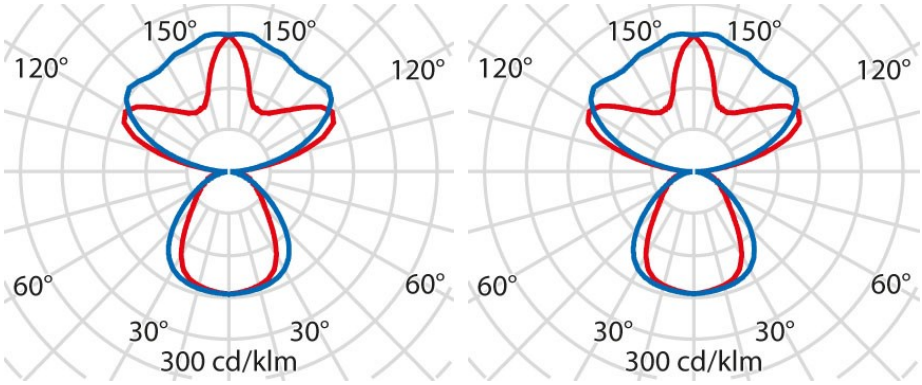


## SMART accessories

SL629+ PL



**3122586**

Single wireless wall switch


WH-87 / White



**3122587**


Double wireless wall switch

WH-87 / White



**8118000257**

Remote control "Master" for versions with a sensor function



**LTX1A6112**

Sensor Modules Standalone

GR-RAL9006 / Grey RAL9006




**LTX1A6212**

Bluetooth canopy set, 1,5 m

GR-RAL9006 / Grey RAL9006

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
**PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy**
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

**info.it@pil.lighting**
www.performanceinlighting.com