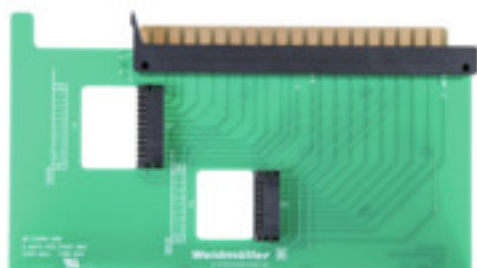


SP-RS PLC PLC5 1771-WN 40CH**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

The FAD PLC-5 front adapters with pre-assembled cables provide safe migration from the PLC-5 cards to other PLC systems or to the u-remote modules from Weidmüller.

- Can be plugged into TS35 terminal rail

General ordering data

Order No.	6720001400
Type	SP-RS PLC PLC5 1771-WN 40CH
GTIN (EAN)	4050118765878
Qty.	1 pc(s).

SP-RS PLC PLC5 1771-WN 40CH**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Dimensions and weights**

Depth	142 mm	Depth (inches)	5.591 inch
Height	254 mm	Height (inches)	10 inch
Width	30 mm	Width (inches)	1.181 inch
Net weight	2,011.901 g		

Temperatures

Storage temperature	0...50 °C	Operating temperature	0...50 °C
---------------------	-----------	-----------------------	-----------

Ratings data

Operating voltage	150 V	Max. current per channel	5 A
-------------------	-------	--------------------------	-----

Classifications

ETIM 6.0	EC002780	ETIM 7.0	EC002780
ETIM 8.0	EC002780	ETIM 9.0	EC002780
ETIM 10.0	EC002780	ECLASS 9.0	27-14-11-52
ECLASS 9.1	27-24-22-92	ECLASS 10.0	27-14-11-52
ECLASS 11.0	27-14-11-52	ECLASS 12.0	27-14-11-52
ECLASS 13.0	27-14-11-52	ECLASS 14.0	27-14-11-52
ECLASS 15.0	27-14-11-52		

Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

Approvals

ROHS	Conform
------	---------

SP-RS PLC PLC5 1771-WN 40CH

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

