

**HDC 16D TSLU 1M25G****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**IP65**

The special die-cast alloy and the multi-layered surface sealing provide complete protection for the HDC housings.

The cleverly designed interlock system is manufactured from stainless steel. This guarantees a long lifespan with high resistance to corrosion and impact.

The housing interlock system provides integrated safety. Our unique, patented spring system provides the housing interlock with a secure grip and prevents accidental opening.

The laser marking allows for easy and quick identification. Each housing is permanently labelled with a laser marking so that each product can be quickly designated and positioned.

Weidmüller RockStar® IP 65 / NEMA Type 4X housings - your first choice for industrial housings with IP 65 protection.

**General ordering data**

|            |                                                                                                                                                                                |
|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Version    | HDC enclosures, Size: 3, Protection degree: IP65 (in plugged condition), Cable entry from side, Plug housing, End-locking clamp, lower side, high, Size of cable entries: M 25 |
| Order No.  | <a href="#">1787480000</a>                                                                                                                                                     |
| Type       | HDC 16D TSLU 1M25G                                                                                                                                                             |
| GTIN (EAN) | 4032248204823                                                                                                                                                                  |
| Qty.       | 1 pc(s).                                                                                                                                                                       |

## HDC 16D TSLU 1M25G

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

|            |       |                 |            |
|------------|-------|-----------------|------------|
| Height     | 72 mm | Height (inches) | 2.835 inch |
| Width      | 43 mm | Width (inches)  | 1.693 inch |
| Net weight | 167 g |                 |            |

## Temperatures

|                   |                   |
|-------------------|-------------------|
| Limit temperature | -40 °C ... 125 °C |
|-------------------|-------------------|

## Dimensions

|                      |           |                     |       |
|----------------------|-----------|---------------------|-------|
| Cable entry          | w. thread | Height of housing B | 72 mm |
| Total length housing | 60 mm     | Width housing C     | 43 mm |

## General data

|                             |                             |                       |                             |
|-----------------------------|-----------------------------|-----------------------|-----------------------------|
| EMC housings                | No                          | Housing main material | diecast aluminium           |
| Material of locking element |                             | Protection degree     | IP65 (in plugged condition) |
| Surface finish              | Stainless steel, rust-proof | Tightening torque     | 1.2 Nm                      |
|                             | Powder coating              |                       |                             |

## Version

|                              |                               |                                |                                     |
|------------------------------|-------------------------------|--------------------------------|-------------------------------------|
| BG                           | 3                             | Cable entry                    | w. thread                           |
| Clamp version                | End-locking clamp             | Colour (RAL)                   | RAL 7035                            |
| Design                       |                               | Design of housing              | Cable entry from side, Plug housing |
|                              | high                          |                                |                                     |
| Design of locking system     | End-locking clamp, lower side | Internal thread                | M 25                                |
| Number of cable entry on top | 0                             | Number of cable entry sideways | 1                                   |
| Size                         | 3                             | Size of cable entries          | M 25                                |
| Suitable for ModuPlug®       | Yes                           | Tightening torque              | 1.2 Nm                              |
| Top part/bottom part/lid     | upper part                    | Type                           | Plug                                |

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC000437    | ETIM 7.0    | EC000437    |
| ETIM 8.0    | EC000437    | ETIM 9.0    | EC000437    |
| ETIM 10.0   | EC000437    | ECLASS 9.0  | 27-44-02-02 |
| ECLASS 9.1  | 27-44-02-02 | ECLASS 10.0 | 27-44-02-02 |
| ECLASS 11.0 | 27-44-02-02 | ECLASS 12.0 | 27-44-02-02 |
| ECLASS 13.0 | 27-44-02-02 | ECLASS 14.0 | 27-44-02-02 |
| ECLASS 15.0 | 27-44-02-02 |             |             |

|                     |                         |
|---------------------|-------------------------|
| Substance           | Acetone                 |
| Chemical resistance | Conditionally resistant |
| Substance           | Drilling oil            |
| Chemical resistance | Resistant               |
| Substance           | Diesel                  |
| Chemical resistance | Resistant               |
| Substance           | Ethyl alcohol           |
| Chemical resistance | Resistant               |

## HDC 16D TSLU 1M25G

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

|                     |                         |
|---------------------|-------------------------|
| Substance           | Transmission oil        |
| Chemical resistance | Resistant               |
| Substance           | Hydraulic oil           |
| Chemical resistance | Resistant               |
| Substance           | Coolant                 |
| Chemical resistance | Resistant               |
| Substance           | Petroleum benzine       |
| Chemical resistance | Resistant               |
| Substance           | Sweat                   |
| Chemical resistance | Resistant               |
| Substance           | Premium gasoline        |
| Chemical resistance | Conditionally resistant |
| Substance           | Water                   |
| Chemical resistance | Resistant               |
| Substance           | UV                      |
| Chemical resistance | Unstable                |
| Substance           | Ozone                   |
| Chemical resistance | Unstable                |

## Environmental Product Compliance

|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RoHS Compliance Status | Compliant without exemption                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| REACH SVHC             | No SVHC above 0.1 wt%                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Chemical resistance    | de.myview.objectmodel.impl.BlockImpl@133e640 de.myview.objectmodel.impl.BlockImpl@3c867769<br>de.myview.objectmodel.impl.BlockImpl@5fdf79c de.myview.objectmodel.impl.BlockImpl@570f2f4b<br>de.myview.objectmodel.impl.BlockImpl@4990d20c de.myview.objectmodel.impl.BlockImpl@4622d968<br>de.myview.objectmodel.impl.BlockImpl@2c899727 de.myview.objectmodel.impl.BlockImpl@252908a<br>de.myview.objectmodel.impl.BlockImpl@4d9d327e de.myview.objectmodel.impl.BlockImpl@1da44b3c<br>de.myview.objectmodel.impl.BlockImpl@7df4c700 de.myview.objectmodel.impl.BlockImpl@6b34cef4<br>de.myview.objectmodel.impl.BlockImpl@4f9e1f2e |

## Approvals

Approvals



|                         |                                                                                                                                                                                                                                                                                                                                                         |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Approvals MAMID         | <a href="https://mdcop.weidmueller.com/mediadelivery/rendition/900_319222/-T1z1mm-S800/">https://mdcop.weidmueller.com/mediadelivery/rendition/900_319222/-T1z1mm-S800/</a> <a href="https://mdcop.weidmueller.com/mediadelivery/rendition/900_319230/-T1z1mm-S800/">https://mdcop.weidmueller.com/mediadelivery/rendition/900_319230/-T1z1mm-S800/</a> |
| ROHS                    | Conform                                                                                                                                                                                                                                                                                                                                                 |
| UL File Number Search   | UL Website                                                                                                                                                                                                                                                                                                                                              |
| Certificate No. (cURus) | E92202                                                                                                                                                                                                                                                                                                                                                  |

## HDC 16D TSLU 1M25G

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Technical data

### Downloads

Approval/Certificate/Document of Conformity

[Manufacturer's declaration](#)

Engineering Data

[CAD data – STEP](#)

Product Change Notification

[20220214 Technical change to HDC housings](#)

[20220214 Technische Änderung bei HDC-Gehäusen](#)

Technical Documentation

[1787480000 HDC\\_16D\\_TSLU\\_1M25G\\_STP\\_Blatt\\_1.pdf](#)

Catalogues

[Catalogues in PDF-format](#)

Brochures

[FL FIELDWIRING EN](#)


[FL FIELDWIRING EN](#)

## HDC 16D TSLU 1M25G

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Drawings

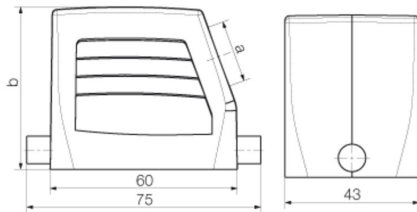

**HDC 16D TSLU 1M25G****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Accessories****Cover**

The special die-cast alloy and the multi-layered surface sealing provide complete protection for the HDC housings.

The cleverly designed interlock system is manufactured from stainless steel. This guarantees a long lifespan with high resistance to corrosion and impact.

The housing interlock system provides integrated safety. Our unique, patented spring system provides the housing interlock with a secure grip and prevents accidental opening.

The laser marking allows for easy and quick identification. Each housing is permanently labelled with a laser marking so that each product can be quickly designated and positioned.

Weidmüller RockStar® IP 65 / NEMA Type 4X housings - your first choice for industrial housings with IP 65 protection.

**General ordering data**

|            |                            |                                                                                                                                                   |
|------------|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| Type       | HDC 06B DMDL 1LB           | Version                                                                                                                                           |
| Order No.  | <a href="#">1665210000</a> | HDC enclosures, Size: 3, Protection degree: IP65 (in plugged condition), Cover for upper part of housing, End-locking clamp, lower side, Standard |
| GTIN (EAN) | 4008190421915              |                                                                                                                                                   |
| Qty.       | 1 pc(s).                   |                                                                                                                                                   |