
PE/N terminal

# PNS 124

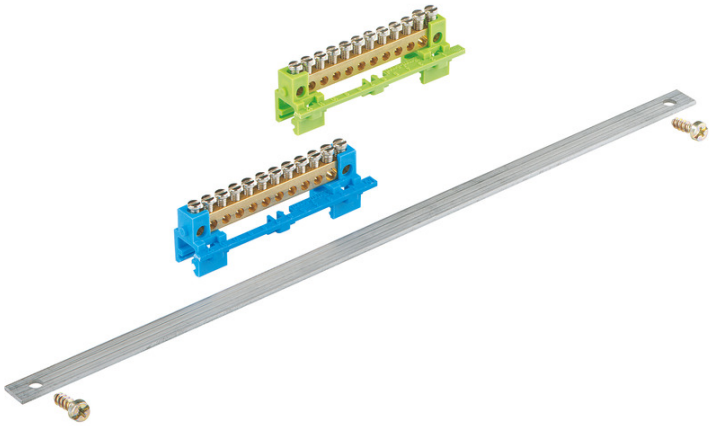

## PNS 124

**PE/N terminal**

Productnumber: 07412401
Dimensions: 20 x 340 x 33,5 mm

PE/N terminal for installation in GTA distribution boards as additional terminals or for replacement

**2 x 12-pole, 6/16 mm², for GTA 580**

Created at 04.06.2026. All statements without guarantee. We reserve the right to make improvements to technical progress.
Günther Spelsberg GmbH + Co. KG
Im Gewerbepark 1 · D-58579 Schalksmühle · Telefon: +49 (0) 23 55 / 892-0 · Telefax: +49 (0) 23 55 / 892-299

# Technical Data

## electrical characteristics

| | |
|---|---|
| Rated operating voltage AC: | 400 V |
| Rated current: | 76 A |
| Number of poles: | 2 |
| shockproof: | No |
| Connection 1: Connection type: | Screws |
| Connection 1: Clamping points per pole: | 12 |
| Connection 1: Suitable for Cu conductors: | 1 |
| Connection 1: Connectable conductor cross-section, single-wire (min): | 6 mm² |
| Connection 1: Connectable conductor cross-section, single-wire (max): | 16 mm² |
| Connection 2: Connection type: | Screws |
| Connection 2: Connectable conductor cross-section, single-wire (min): | 1.5 mm² |
| Connection 2: Connectable conductor cross-section, single-wire (max): | 6 mm² |

## Dimensions

| | |
|---|---|
| Width: | 20 mm |
| Length: | 340 mm |
| Height: | 33.5 mm |
| Weight: | 0.136 kg |

## Material characteristics

| | |
|---|---|
| Glow-wire flammability: | 960 °C (EN 60695-2-11) |

## mechanical properties

| | |
|---|---|
| Connection 1: Tightening moment: | 1.4 Nm |

## Sales Information

| | |
|---|---|
| EAN: | 4013902051434 |
| ETIM Class: | EC001284 |

## Sales Information

| | |
|---|---|
| Custom tariff number: | 85369010 |
| Minimum order quantity: | 1 |

## Material

| | |
|---|---|
| Insulating body material: | Thermoplastic |