Meter housing

AKi-Z 3



AKi-Z 3

Meter housing

CUSTOMIZABLE

Productnumber: 75201101
Dimensions: 300 x 450 x 210 mm

Meter enclosure, meter panel unit installation surface in accordance to DIN 43870-1, with transparent cover, sealable as standard, with mounted meter cross for three-phase meters and meter fixing screws, with double membrane seals, sealing and insulating plugs

IP65 IK08 400V AC

Technical Data

electrical characteristics

Rated operating voltage AC:	400 V
Protection class:	II
Type of protection:	IP65
UL Type Rating:	not specified

Dimensions

Width:	300 mm
Length:	450 mm
Height:	210 mm
Weight:	2.845 kg

Material characteristics

UV-resistant:	yes
Halogen free:	yes
Flammability class according with UL94:	V2
Glow-wire flammability:	850 °C (EN 60695-2-11)

mechanical properties

Type of fastening:	Surface mounting
Impact strength:	IK08

Ambient conditions

max. relative humidity 25°C:	95 %
max. relative humidity 40°C:	50 %
Min. ambient temperature:	-35 °C
Max. ambient temperature:	80 °C
24h ambient temperature:	60 °C
Installation location:	protected outdoor areas

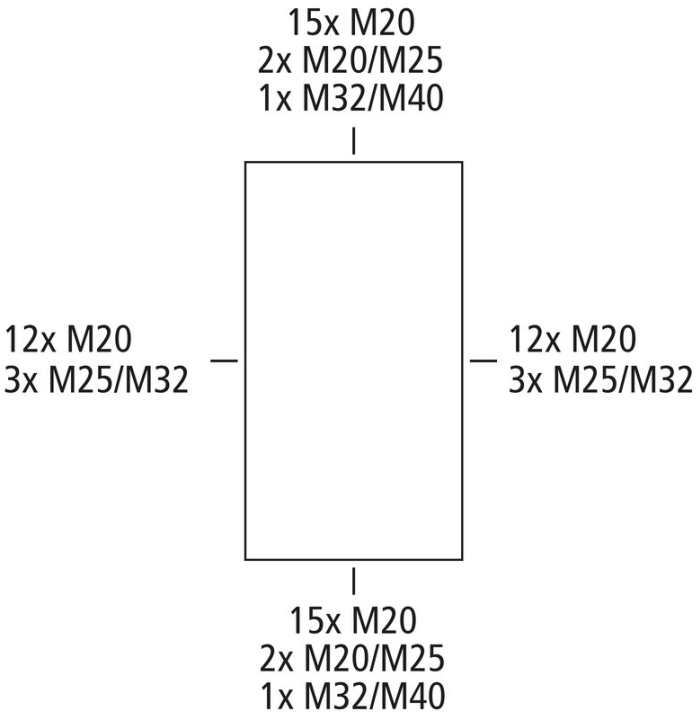
Sales Information

EAN:	4013902885787
ETIM Class:	EC000248
Custom tariff number:	85389099
Minimum order quantity:	1

Material

Base unit material:	Polycarbonate
Cover material:	Polycarbonate
Sealing material:	Polyurethane
Cover screw material:	Polyamide, glass-fibre reinforced

Cable gland


15x M20
2x M20/M25
1x M32/M40
12x M20
3x M25/M32
12x M20
3x M25/M32
15x M20
2x M20/M25
1x M32/M40