

**BLZ 7.50/07/180B SN GN BX****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

Female plugs with clamping-yoke screw wire-connect system. The female plugs provide space for labelling and can be coded.

**General ordering data**

|              |                                                                                                                                       |
|--------------|---------------------------------------------------------------------------------------------------------------------------------------|
| Version      | PCB plug-in connector, female plug, 7.50 mm, Number of poles: 7, 180°, Clamping yoke connection, Clamping range, max. : 3.31 mm², Box |
| Order No.    | <a href="#">2864520000</a>                                                                                                            |
| Type         | BLZ 7.50/07/180B SN GN BX                                                                                                             |
| GTIN (EAN)   | 4064675600015                                                                                                                         |
| Qty.         | 40 pc(s).                                                                                                                             |
| Product data | IEC: 800 V / 18.5 A / 0.2 - 2.5 mm²<br>UL: 300 V / 15 A / AWG 26 - AWG 12                                                             |
| Packaging    | Box                                                                                                                                   |

Creation date May 11, 2025 10:26:48 PM CEST

Catalogue status 26.04.2025 / We reserve the right to make technical changes.

**BLZ 7.50/07/180B SN GN BX****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Dimensions and weights**

|            |         |                 |            |
|------------|---------|-----------------|------------|
| Depth      | 20.1 mm | Depth (inches)  | 0.791 inch |
| Height     | 15.2 mm | Height (inches) | 0.598 inch |
| Width      | 52.5 mm | Width (inches)  | 2.067 inch |
| Net weight | 14.05 g |                 |            |

**System Parameters**

|                            |                                     |                                              |                          |
|----------------------------|-------------------------------------|----------------------------------------------|--------------------------|
| Product family             | OMNIMATE Signal - series BL/SL 7.50 | Wire connection method                       | Clamping yoke connection |
| Pitch in mm (P)            | 7.5 mm                              | Pitch in inches (P)                          | 0.295 "                  |
| Conductor outlet direction | 180°                                | Number of poles                              | 7                        |
| L1 in mm                   | 45 mm                               | L1 in inches                                 | 1.772 "                  |
| Pin series quantity        | 1                                   | Touch-safe protection acc. to DIN VDE 57 106 | Safe from finger touch   |
| Volume resistance          | 4.50 mΩ                             | Can be coded                                 | Yes                      |
| Tightening torque, min.    | 0.4 Nm                              | Tightening torque, max.                      | 0.5 Nm                   |
| Clamping screw             | M 2.5                               | Screwdriver blade standard                   | DIN 5264                 |
| Plugging cycles            | 25                                  | Plugging force/pole, max.                    | 9 N                      |
| Pulling force/pole, max.   | 8.5 N                               |                                              |                          |

**Material data**

|                                  |          |                             |            |
|----------------------------------|----------|-----------------------------|------------|
| Insulating material              | PBT      | Colour                      | Pale green |
| Colour chart (similar)           | RAL 6021 | Insulating material group   | IIIa       |
| Comparative Tracking Index (CTI) | ≥ 200    | UL 94 flammability rating   | V-0        |
| Contact material                 | Cu-alloy | Storage temperature, min.   | -40 °C     |
| Storage temperature, max.        | 70 °C    | Operating temperature, min. | -50 °C     |
| Operating temperature, max.      | 100 °C   |                             |            |

**Conductors suitable for connection**

|                                                                     |                         |
|---------------------------------------------------------------------|-------------------------|
| Clamping range, min.                                                | 0.13 mm <sup>2</sup>    |
| Clamping range, max.                                                | 3.31 mm <sup>2</sup>    |
| Solid, min. H05(07) V-U                                             | 0.2 mm <sup>2</sup>     |
| Solid, max. H05(07) V-U                                             | 2.5 mm <sup>2</sup>     |
| Flexible, min. H05(07) V-K                                          | 0.2 mm <sup>2</sup>     |
| Flexible, max. H05(07) V-K                                          | 2.5 mm <sup>2</sup>     |
| w. plastic collar ferrule, DIN 46228 pt 4, 0.2 mm <sup>2</sup> min. |                         |
| w. plastic collar ferrule, DIN 46228 pt 4, 2.5 mm <sup>2</sup> max. |                         |
| w. wire end ferrule, DIN 46228 pt 1, min.                           | 0.2 mm <sup>2</sup>     |
| w. wire end ferrule, DIN 46228 pt 1, max.                           | 2.5 mm <sup>2</sup>     |
| Plug gauge in accordance with EN 60999 a x b; ø                     | 2.8 mm x 2.0 mm; 2.4 mm |

**BLZ 7.50/07/180B SN GN BX****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data**

|                     |                                        |                              |                         |      |
|---------------------|----------------------------------------|------------------------------|-------------------------|------|
| Clampable conductor | Cross-section for conductor connection | Type                         | fine-wired              |      |
|                     |                                        | nominal                      | 0.5 mm <sup>2</sup>     |      |
|                     | wire end ferrule                       | Stripping length             | nominal                 | 6 mm |
|                     |                                        | Recommended wire-end ferrule | <a href="#">H0.5/6</a>  |      |
|                     | Cross-section for conductor connection | Type                         | fine-wired              |      |
|                     |                                        | nominal                      | 1 mm <sup>2</sup>       |      |
|                     | wire end ferrule                       | Stripping length             | nominal                 | 6 mm |
|                     |                                        | Recommended wire-end ferrule | <a href="#">H1.0/6</a>  |      |
|                     | Cross-section for conductor connection | Type                         | fine-wired              |      |
|                     |                                        | nominal                      | 1.5 mm <sup>2</sup>     |      |
|                     | wire end ferrule                       | Stripping length             | nominal                 | 7 mm |
|                     |                                        | Recommended wire-end ferrule | <a href="#">H1.5/7</a>  |      |
|                     | Cross-section for conductor connection | Type                         | fine-wired              |      |
|                     |                                        | nominal                      | 2.5 mm <sup>2</sup>     |      |
|                     | wire end ferrule                       | Stripping length             | nominal                 | 7 mm |
|                     |                                        | Recommended wire-end ferrule | <a href="#">H2.5/7</a>  |      |
|                     | Cross-section for conductor connection | Type                         | fine-wired              |      |
|                     |                                        | nominal                      | 0.75 mm <sup>2</sup>    |      |
|                     | wire end ferrule                       | Stripping length             | nominal                 | 6 mm |
|                     |                                        | Recommended wire-end ferrule | <a href="#">H0.75/6</a> |      |

Reference text      The outside diameter of the plastic collar should not be larger than the pitch (P). Length of ferrules is to be chosen depending on the product and the rated voltage.

**Rated data acc. to IEC**

|                                                                           |                        |                                                                       |                   |
|---------------------------------------------------------------------------|------------------------|-----------------------------------------------------------------------|-------------------|
| tested acc. to standard                                                   | IEC 60664-1, IEC 61984 | Rated current, min. number of poles (Tu=20°C)                         | 18.5 A            |
| Rated current, max. number of poles (Tu=20°C)                             | 17 A                   | Rated current, min. number of poles (Tu=40°C)                         | 15 A              |
| Rated current, max. number of poles (Tu=40°C)                             | 14.5 A                 | Rated voltage for surge voltage class / pollution degree II/2         | 800 V             |
| Rated voltage for surge voltage class / pollution degree III/2            | 630 V                  | Rated voltage for surge voltage class / pollution degree III/3        | 500 V             |
| Rated impulse voltage for surge voltage class/ pollution degree II/2      | 6,000 V                | Rated impulse voltage for surge voltage class/ pollution degree III/2 | 6 kV              |
| Rated impulse voltage for surge voltage class/ contamination degree III/3 | 6 kV                   | Short-time withstand current resistance                               | 3 x 1s with 120 A |

**Rated data acc. to CSA**

|                                   |        |                                   |        |
|-----------------------------------|--------|-----------------------------------|--------|
| Rated voltage (Use group B / CSA) | 300 V  | Rated voltage (Use group D / CSA) | 300 V  |
| Rated current (Use group B / CSA) | 15 A   | Rated current (Use group D / CSA) | 10 A   |
| Wire cross-section, AWG, min.     | AWG 26 | Wire cross-section, AWG, max.     | AWG 12 |

**Rated data acc. to UL 1059**

|                                       |        |                                       |        |
|---------------------------------------|--------|---------------------------------------|--------|
| Rated voltage (Use group B / UL 1059) | 300 V  | Rated voltage (Use group D / UL 1059) | 300 V  |
| Rated current (Use group B / UL 1059) | 15 A   | Rated current (Use group D / UL 1059) | 10 A   |
| Wire cross-section, AWG, min.         | AWG 26 | Wire cross-section, AWG, max.         | AWG 12 |

**Packing**

|           |        |            |        |
|-----------|--------|------------|--------|
| Packaging | Box    | VPE length | 228 mm |
| VPE width | 133 mm | VPE height | 59 mm  |

Creation date May 11, 2025 10:26:48 PM CEST

**BLZ 7.50/07/180B SN GN BX****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Classifications**

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC002638    | ETIM 7.0    | EC002638    |
| ETIM 8.0    | EC002638    | ETIM 9.0    | EC002638    |
| ETIM 10.0   | EC002638    | ECLASS 9.0  | 27-44-03-09 |
| ECLASS 9.1  | 27-44-03-09 | ECLASS 10.0 | 27-44-03-09 |
| ECLASS 11.0 | 27-46-02-02 | ECLASS 12.0 | 27-46-02-02 |
| ECLASS 13.0 | 27-46-02-02 | ECLASS 14.0 | 27-46-02-02 |
| ECLASS 15.0 | 27-46-02-02 |             |             |

**Environmental Product Compliance**

|                        |                             |
|------------------------|-----------------------------|
| RoHS Compliance Status | Compliant without exemption |
| REACH SVHC             | No SVHC above 0.1 wt%       |

**Important note**

|                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IPC conformity | Conformity: The products are developed, manufactured and delivered according international recognized standards and norms and comply with the assured properties in the data sheet resp. fulfill decorative properties in accordance with IPC-A-610 "Class 2". Further claims on the products can be evaluated on request.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Notes          | <ul style="list-style-type: none"> <li>• Additional variants on request</li> <li>• Gold-plated contact surfaces on request</li> <li>• Rated current related to rated cross-section &amp; min. No. of poles.</li> <li>• Wire end ferrule without plastic collar to DIN 46228/1</li> <li>• Wire end ferrule with plastic collar to DIN 46228/4</li> <li>• P on drawing = pitch</li> <li>• Rated data refer only to the component itself. Clearance and creepage distances to other components are to be designed in accordance with the relevant application standards.</li> <li>• In accordance with IEC 61984, OMNIMATE-connectors are connectors without breaking capacity (COC). During designated use, connectors are not allowed to be engaged or disengaged when live or under load</li> <li>• Long term storage of the product with average temperature of 50 °C and maximum humidity 70%, 36 months</li> </ul> |

**Approvals**

|      |         |
|------|---------|
| ROHS | Conform |
|------|---------|


## BLZ 7.50/07/180B SN GN BX

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

# Drawings

## Dimensional drawing

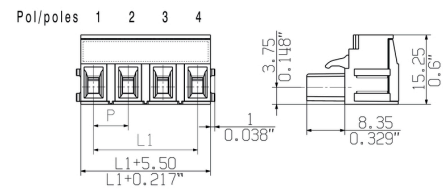

## Derating curve

