

FUSOMAT DIN

Fuse combination switches with tripping function

250 A to 1250 A



The solution for

- > Healthcare
- > Energy
- > Infrastructure & Transport
- > Industry

Strong points

- > Automatic tripping
- > Optimum safety
- > High breaking capacity

Conformity to standards

- > IEC 60947-3

Function

FUSOMAT fuse-combination switches are manually operated 3 or 4-pole load break switches with visible breaking and a remote tripping function. They provide load operation, safety disconnection and protection against overloads and short-circuits in any low voltage electrical circuit.

They can ensure the automatic opening of the circuit together with:

- fuse blown detection system (see DDMM or FMD),
- thermal relay,
- differential relay (see RESYS),
- other safety devices.

Advantages

Automatic tripping

- FUSOMAT is the only fuse combination switch that allows automatic remote opening by means of a coil associated with an external device.

Optimum safety

- Double phase breaking (upstream and downstream from the fuse) and fully visible isolation keep people and equipment protected from overcurrent.


High breaking capacity

- High breaking capacity fuses (100 kA rms) provide protection from overloads and short circuits.

General characteristics

- For industrial fuses up to 1250 A.
- 3P or 4P available.
- Direct or external handle.
- Auxiliary contact optional.

Configurations

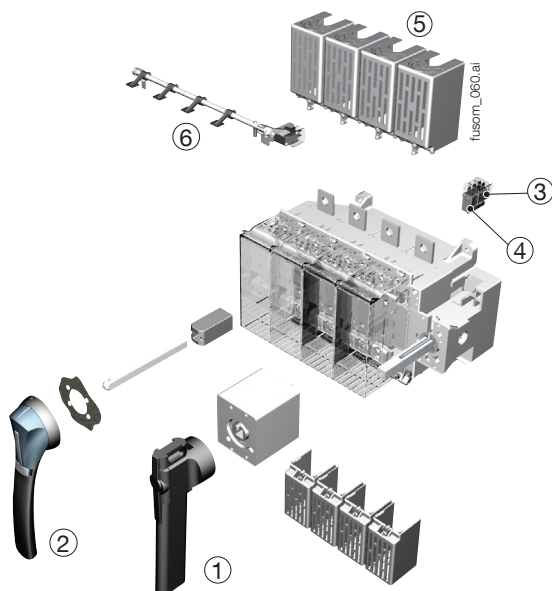

Functional diagram (for further details see the installation instructions supplied with the product).

1. Direct front operation.
2. External front operation.
3. NO/NC auxiliary contact for each position.
4. NO/NC auxiliary contact with standard shunt trip coil control.
5. Terminal shroud.
6. Fuse melting detector (FMD)

References

FUSOMAT DIN front operation

Device fitted with a 230 VAC shunt trip coil

Rating (A) / Fuse	N° of Poles	Appareil nu	direct handle	External handle	Shaft for external handle	Auxiliary contact position	Auxiliary contact tripping	1 st auxiliary contact blown fuse	Terminal Shrouds (1 unit)	Top terminals screen	Inter phase barrier								
250 A / 1	3 P	3650 3026	Black 3999 6201 ⁽¹⁾	S3 type Black IP55 1431 3511 ⁽¹⁾ Red / Yellow IP55 1432 3511	200 mm 1401 1520 320 mm 1401 1532 ⁽¹⁾	1 st contact NO/NC 3999 0051 2 nd contact NO/NC 3999 0052	1 contact NO/NC 3999 0031	3 P 3994 1304 4 P 3994 1404	3 P 3998 3040 ⁽²⁾ 4 P 3998 4040 ⁽²⁾										
	4 P	3650 6026																	
400 A / 2	3 P	3650 3041						3 P 3994 1306 4 P 3994 1406	3 P 3998 3063 ⁽²⁾ 4 P 3998 4063 ⁽²⁾										
	4 P	3650 6041																	
630 A / 3	3 P	3650 3064						3 P 3994 1312 4 P 3994 1412		3998 3120 ⁽³⁾ 4 P 3998 4120 ⁽³⁾	3998 3120 ⁽³⁾ 4 P 3998 4120 ⁽³⁾								
	4 P	3650 6064																	
1250 A / 4	3 P	3650 3121	Black 3999 6012 ⁽¹⁾																
	4 P	3650 6121																	

(1) Standard.

(2) Top/bottom

(3) Bottom terminals screen as standard

(4) One of the T4 fuses is fitted with a striker.

FUSOMAT DIN

Fuse combination switches with tripping function

250 A to 1250 A

Accessories

Direct handle

Front operation

Current (A)	Handle colour	Reference
250 ... 630	Black	3999 6201
1250	Black	3999 6012

Lateral operation

Current (A)	Handle colour	Reference
250 ... 1250	Black	3999 6012



access_156.eps

External handle

Front operation

Current (A)	Handle type	Handle colour	External IP	Reference
250 ... 1250	S3	Black	IP55	1431 3511
250 ... 1250	S3	Rouge	IP55	1432 3511



access_151.eps

S3 type handle



access_166.eps

S3 type handle

S-type handle adapter

Use


Enables S type handles to be fitted in place of existing older style SOCOMEC handles.

Dimensions

Adds 12 mm to the handle depth.

Handle colour	To be ordered in multiples of	External IP ⁽¹⁾	Reference
Black	1	IP65	1493 0000

(1) IP: protection index according to IEC 60529.

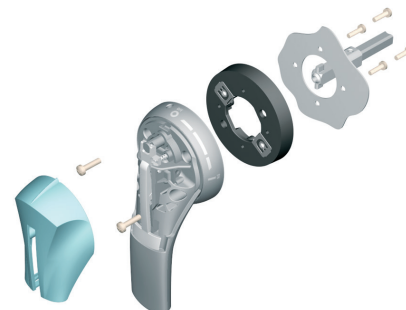

access_157.eps

Alternative S type handle cover colour

Use

For single lever S3 type handles.

Other colours available:

Please contact us.

Color	To be ordered in multiples of	Handle	Reference
Light grey	50	S3 type	1401 0001
Dark Grey	50	S3 type	1401 0011



access_198.eps

Shaft for external operation

Use

Standard lengths:
- 200 mm
- 320 mm.

Other lengths available:


Please contact us.

Front operation

Current (A)	Dimension X (mm)	Shaft length (mm)	Type	Reference
250 ... 400	300 ... 422	200	15 x 12	1401 1520
250 ... 400	300 ... 542	320	15 x 12	1401 1532
630 ... 1250	345 ... 467	200	15 x 12	1401 1520
630 ... 1250	345 ... 587	320	15 x 12	1401 1532

Lateral operation

Current (A)	Dimension Y (mm)	Shaft length (mm)	Type	Reference
250 ... 1250	78 ... 200	200	15 x 12	1403 1520

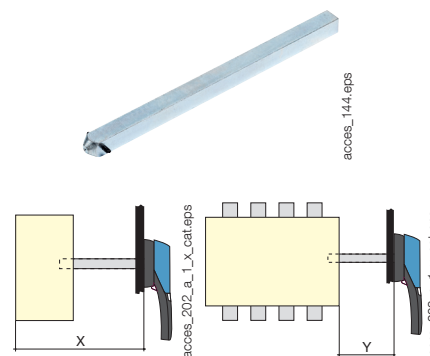

Auxiliary contact

Use

Pre-break and signalling of positions
0 and I: 1 to 2 NO/NC auxiliary contacts.

Connection to the control circuit

By 6.35 mm fast-on terminal.

Features

NO/NC auxiliary contact IP2.

Electrical Rating

30,000 operations.

Coil tripping

1 to 2 NO/NC auxiliary contacts.

NO/NC position contact

Current (A)	Current nominal (A)	Operating current I _o (A)			
		250 VAC	400 VAC	5A / 24 VDC	48 VDC
		AC-13	AC-13	DC-13	DC-13
250 ... 1250	16	12	8	14	6

NO/NC coil trip signalling

Current (A)	Current nominal (A)	Operating current I _e (A)			
		250 VAC	400 VAC	5A / 24 VDC	48 VDC
		AC-13	AC-13	DC-13	DC-13
250 ... 1250	16	12	8	12	2

NO/NC changeover contact


Current (A)	AC position	Reference
250 ... 1250	1 st AC	3999 0051
250 ... 1250	2 nd auxiliary contact	3999 0052

NO/NC low level position contact

Current (A)	AC position	Reference
250 ... 1250	1 st AC	3999 0111
250 ... 1250	2 nd auxiliary contact	3999 0112

NO/NC coil trip signalling

Current (A)	AC position	Reference
250 ... 1250	1 AC	3999 0031

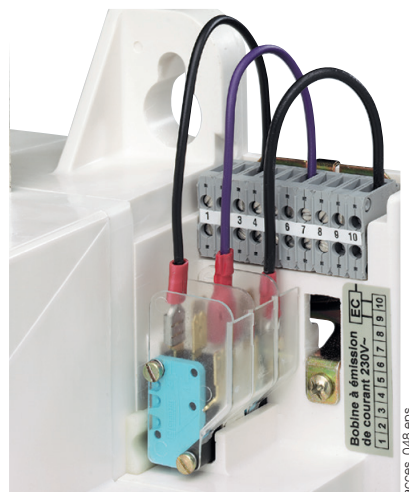

FUSOMAT DIN

Fuse combination switches with tripping function

250 A to 1250 A

Accessories (continued)

Tripping Coil

Shunt trip coil

	Replacement coil	Alternative coil
Premim.	Reference	Reference
24 VAC	3990 1024	3991 1024
48 VAC	3990 1048	3991 1048
110 VAC	3990 1110	3991 1110
230 V a.c.	3990 1220	included
400 VAC	3990 1380	3991 1380
12 VDC	-	3991 2012
5A / 24 VDC	3990 2024	3991 2024
48 VDC	3990 2048	3991 2048
110 / 200 VDC	3990 2220	3991 2220
220 VDC	3990 2220	-

Undervoltage trip coil

	Replacement coil	Alternative coil
Premim.	Reference	Reference
24 VAC	3990 3024	3991 3024
48 VAC	3990 3048	3991 3048
110 VAC	3990 3110	3991 3110
230 V a.c.	3990 3220	3991 3220
400 VAC	3990 3380	3991 3380
12 VDC	-	3991 4012
5A / 24 VDC	3990 4024	3991 4024
48 VDC	3990 4048	-
110 VDC	3990 4110	-
220 VDC	3990 4220	3991 4220


Use

Omnipolar breaking remotely controlled by a shunt trip or undervoltage release coil. Note: the shunt trip coil must not be supplied for more than 5s.

Coil mounted as standard on the device: shunt trip coil. To modify the coil, order one of the references opposite with the device.

Examples of ordering:

- FUSOMAT with shunt trip coil 230 VAC
- 1 reference: FUSOMAT 250 A, 3-pole, front operation, reference 3650 3026.
- FUSOMAT with another coil type or voltage
- 2 references: FUSOMAT 250 A, 3-pole, front operation with 110 VAC undervoltage trip coil: 3650 3026 + 3991 3110.

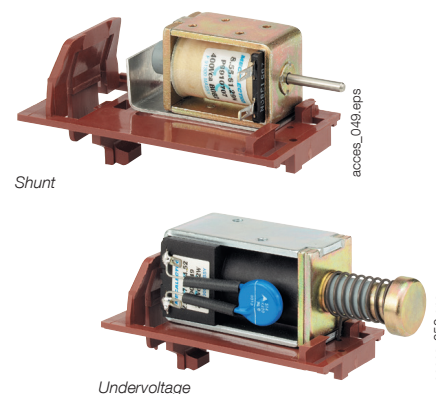

Current-reducing resistor for undervoltage trip coil

Use

By limiting the current, the resistor reduces the effects on undervoltage trip coils used in continuous processes or those exposed to high ambient temperatures.

Premim.	Reference
110 VAC	3999 3112
230 VAC	3999 3230
400 VAC	3999 3400
110 VDC	3999 4110

Fuse blown indication

Use

For DIN fuse cartridge with striker.

Electrical principle

An NO/NC auxiliary contact detects fuse blowing.

Connection to the control circuit

By 6.35 mm fast-on terminal.

Electrical Rating

30,000 operations.

NO/NC changeover contact

Current (A)	N° of Poles	AC position	Reference
250... 400	3 P	1 st	3994 1304
250... 400	4 P	1 st	3994 1404
630	3 P	1 st	3994 1306
630	4 P	1 st	3994 1406
1250	3 P	1 st	3994 1312
1250	4 P	1 st	3994 1412
1250	3/4 P	2 nd	3994 1902

Features

Current (A)	Current nominal (A)	Operating current I _g (A)			
		250 VAC	400 VAC	5A / 24 VDC	48 VDC
		AC-13	AC-13	DC-13	DC-13
250 ... 1250	16	12	8	12	2

Terminal Shrouds

Use

Top or bottom protection from direct contact with terminals or connection parts.

Advantage

Perforations allow remote thermographic inspection without the need to remove the shrouds.

For FUSOMAT

Current (A)	N° of Poles	Position	Reference
250... 400	3 P	top or bottom	3998 3040 ⁽¹⁾
250... 400	4 P	top or bottom	3998 4040 ⁽²⁾
630	3 P	top or bottom	3998 3063 ⁽¹⁾
630	4 P	top or bottom	3998 4063 ⁽²⁾

(1) Reference comprises 3 parts.

(2) Reference comprises 4 parts.




Terminals protection screen

Use

Top or bottom protection against direct contact with terminals or connecting parts.

Current (A)	N° of Poles	Position	Reference
1250	3 P	Top	3998 3120
1250	4 P	Top	3998 4120
1250	3/4 P	Bottom	included

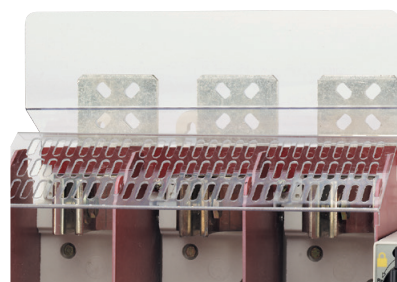

FUSOMAT DIN

Fuse combination switches with tripping function

250 A to 1250 A

Accessories (continued)

Inter-phase barrier

Use

Safety isolation between the terminals, essential for use at 690 VAC or in a polluted or dusty atmosphere.

Current (A)	N° of Poles	Reference
1250	3 P	2998 0003
1250	4 P	2998 0004



Handle key interlocking accessories

Use

- Locking in position 0 of the front operation handle:
- Using a padlock (not supplied) and standard padlocking function of the handle
- Using RONIS 1104 A lock (key BC 3318) to be mounted directly on the padlockable handle
- Using CASTELL K lock (not supplied)
- Using RONIS EL11AP lock (not supplied)

Locking using RONIS EL 1104 A lock (supplied)

Current (A)	Command	Reference
250 ... 1250	front direct	3999 8104


Locking using RONIS EL 11AP lock (not included)

Current (A)	Command	Reference
250 ... 1250	handle	1499 7701
1600 ... 1250	front direct	3999 6117 ⁽¹⁾

Locking using CASTELL K (not supplied)

Current (A)	Command	Reference
250 ... 1250	handle	1499 7702

⁽¹⁾ For SIDERMAT fuse-combination switches only



RONIS 1104 A lock.

Label Holder

Use

Recognisable self-adhesive label allowing identification of the devices.

Dimensions W x H (mm)	To be ordered in multiple of	Reference
18 x 13	50	7769 9999



Other specific accessories

Use

- Customised protection screens (for specific dimensions or high ambient temperatures).
- Connection accessories.
- Mounting plates for standard racks
- For specific atmospheric conditions.

Features

According to IEC 60947-3

		FUSOMAT			
Thermal current I_{th} (40 °C)		250 A	400 A	630 A	1250 A
NFC/DIN fuse size		1	2	3	4
Rated insulation voltage U_i (V)		1000	1000	1000	1000
Rated impulse withstand voltage U_{imp} (kV)		12	12	12	12
Rated operational currents I_e (A)					
Rated voltage	Load duty category	A/B ⁽¹⁾	A/B ⁽¹⁾	A/B ⁽¹⁾	A/B ⁽¹⁾
400 VAC	AC-21 A / AC-21 B	250/250	400/400	630/630	1250/1250
400 VAC	AC-22 A / AC-22 B	250/250	400/400	630/630	1250/1250
400 VAC	AC-23 A / AC-23 B	250/250	400/400	630/630	1000/1000
690 VAC ⁽²⁾	AC-21 A / AC-21 B	200/200	315/400	500 /630	800/1250
690 VAC ⁽²⁾	AC-22 A / AC-22 B	200/200	315/400	500 /630	800/1000
690 VAC ⁽²⁾	AC-23 A / AC-23 B	200/200	250/315	315/400	630/630
220 VDC	DC-21 A / DC-21 B	200/200	315/315	400/630	800/1250
220 VDC	DC-22 A / DC-22 B	200/200	315/315	315/630	800/1250
220 VDC	DC-23 A / DC-23 B	200/200	200/315	400/630	800/1000
440 VDC	DC-21 A / DC-21 B	200/200	315/315	400/630 ⁽³⁾	800/1250 ⁽⁴⁾
440 VDC	DC-22 A / DC-22 B	200/200	315/315 ⁽³⁾	315/630 ⁽³⁾	800/1250 ⁽⁴⁾
440 VDC	DC-23 A / DC-23 B	200/200	200/315 ⁽³⁾	400/630 ⁽³⁾	800/1000 ⁽⁴⁾
Operational power AC-23 (kW) ⁽¹⁾⁽⁵⁾					
400 VAC without pre-break auxiliary contact		132/132	220/220	355/355	560/560
At 690 VAC without pre-break AC		185/185	220/295	295/400	600/600
Reactive power (kvar)					
At 400 VAC (kvar) ⁽⁶⁾		115	185	290	575
Fuse protected short-circuit withstand with gG DIN fuses					
Prospective short-circuit current (kA rms.) ⁽⁶⁾		100	100	100	100
Associated fuse rating (A) ⁽⁶⁾		250	400	630	1,250
Short-circuit operation (switch only)					
Rated peak withstand current (kA peak) ⁽⁶⁾		30	45	60	80
Connection					
Minimum Cu cable cross-section (mm ²)		95	185	2 x 150	
Minimum Cu cable cross-section (mm ²)				2 x 30 x 5	2 x 60 x 5
Minimum Cu cable cross-section (mm ²)		240	240	2 x 300	4 x 185
Maximum Cu busbar width (mm)		40	40	50	100
Tightening torque min (Nm)		20	20	40	20
Mechanical Characteristics					
Durability (number of operating cycle)		8000	8000	5000	5000
Weight of a 3-pole device (kg)		7	8	16	28
Weight of a 4-pole device (kg)		8.5	9.5	19	33

(1) Category with index A = frequently operated /

Category with index B = infrequently operated.

(2) With terminal shrouds or terminal screen.

(3) Poles not juxtaposed.

(4) 4-pole device with 2 poles in series per polarity

(5) The power value is given for information only; the current values vary from one manufacturer to another.

(6) For a rated operational voltage $U_e = 400$ VAC.

FUSOMAT DIN


Fuse combination switches with tripping function

250 A to 1250 A

Dimensions


250 to 630 A

Direct front operation

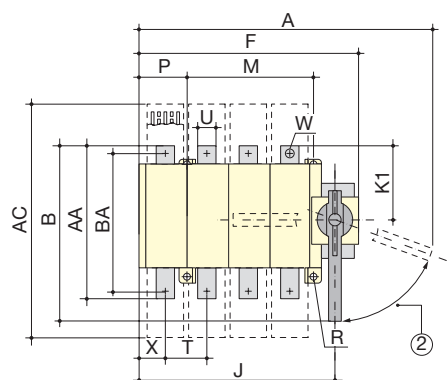

1. Terminal shroud.
2. 70° reset.


External front operation

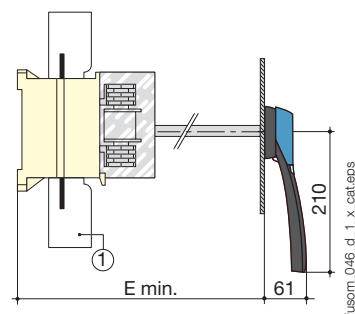

Current (A)	Overall dimensions					Terminal Shrouds	Body						Switch mounting					Connection										
	A 3p.	A 4p.	B	C	E min	AC	F 3p.	F 4p.	H	J 3p.	J 4p.	K1	M	N	P 3p.	P 4p.	R	T	U	V1	V2	W	X 3p.	X 4p.	Y	Z	AA	BA
250	435	495	305	307	228	388	285	345	221	253	313	115	210	180	10	70	7	65	32	35	43	11	51	46	3	67	238	208
400	435	495	305	307	228	388	285	345	221	253	313	115	210	180	10	70	7	65	32	35	43	13	51	46	5	69	238	208
630	491	570	350	348	276	470	346	425.5	268	308	388	150	250	250	20	100	9	80	50	50	50	13	65	65	7	72	300	260

1250 A


Direct front operation

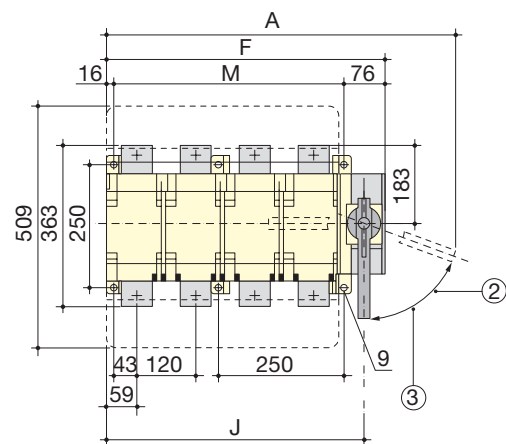

1. Top terminal screen
2. 70° reset.

3. 65° padlock
4. Front protective screen.

External front operation

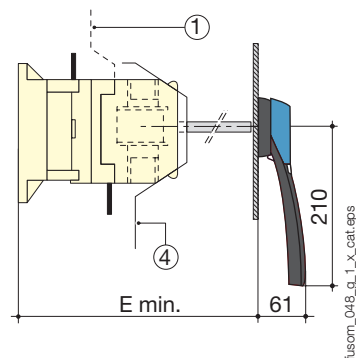


Current (A)	Overall dimensions			Body				Switch mounting	
	A 3p.	A 4p.	E min	F 3p.	F 4p.	J 3p.	J 4p.	M 3p.	M 4p.
1,250	582	702	416	437	557	399.5	519.5	345	465


A connection terminals

FUSOMAT

1250 A
Top



1250 A
Bottom



Dimensions for external handles

FUSOMAT

250 to 1250 A

Handle type	Direction of operation	Door drilling
S3 type	Front operation	