Junction box

Abox HA 250



Abox HA 250

Junction box

Productnumber: 48142501
Dimensions: 252 x 202 x 120 mm

Junction box, protection class IP54/IP66, nominal cross-section 25 mm², certified by DLG (Ammonia resistance), knockouts, M20/M25/M40/M50, (4 rear, 10 side), internal fixing points, for standard indoor and protected outdoor installations

grey, Ui=690 V AC, with standard rail-mounted main line junction terminals, 4-pole, clampable cross-sections per main line pole: 1.5 - 25 mm² rigid (Cu/Al) and multi-wire (Cu), 1.5 -16 mm² fine-wire with wire end ferrule (Cu). Clampable cross-sections per branch line pole 1.5 - 16 mm² rigid (Cu/Al) and multi-wire (Cu), 1.5 -10 mm² fine-wire with wire end ferrule (Cu). Rated current in accordance with EN 60947-7: 130 A (Cu) and 100 A (Al)

Accessories supplied:
4 attachment bushes IP55 M40 sealing range 17 - 30 mm, 3 twist plugs IP54 M50 sealing range 22 - 35 mm, cover retainer

Technical Data

electrical characteristics

Rated insulation voltage AC:	690 V
Rated insulation voltage DC:	690 V
Max. conductor cross section:	25 mm²
Protection class:	II
Type of protection:	IP54/IP66
Terminal type:	Screw terminal
Number of poles:	4

Colours

Base unit colour:	grey
Cover colour:	grey

Dimensions

Width:	252 mm
Length:	202 mm
Height:	120 mm
Inner length:	186 mm
Inner width:	236 mm
Inner height:	99 mm
Weight:	1.3578 kg

Material characteristics

UV-resistant:	yes
Halogen free:	yes
Flammability class according with UL94:	HB
Glow-wire flammability:	750 °C (EN 60695-2-11)

mechanical properties

Impact strength:	IK07
Sealable:	yes

mechanical properties

Cover screw torque:	1.5 Nm
Type of fastening:	Wall/ceiling mounting
Fastening:	internal fixing points

Ambient conditions

max. relative humidity 25°C:	95 %
max. relative humidity 40°C:	50 %
Min. ambient temperature:	-25 °C
Max. ambient temperature:	55 °C
24h ambient temperature:	35 °C
Installation location:	protected outdoor areas

Sales Information

EAN:	4013902663033
ETIM Class:	EC002600
Custom tariff number:	85369095
Minimum order quantity:	1

Material

Base unit material:	Polycarbonate
Cover material:	Polycarbonate
Sealing material:	Thermoplastic elastomer
Cover screw material:	Stainless steel 1.4567 (V2A)

Certificates

Test mark:	DLG (Ammonia resistance)

Accessories

22742101 - KVR M20-GDB/MGM - Cable gland

22742001 - KVR M20-MGM - Cable gland

22742501 - KVR M25-MGM - Cable gland

22743201 - KVR M32-MGM - Cable gland

22744001 - KVR M40-MGM - Cable gland

22745001 - KVR M50-MGM - Cable gland

23042001 - AST M20 - Attachment bushes

23042501 - AST M25 - Attachment bushes

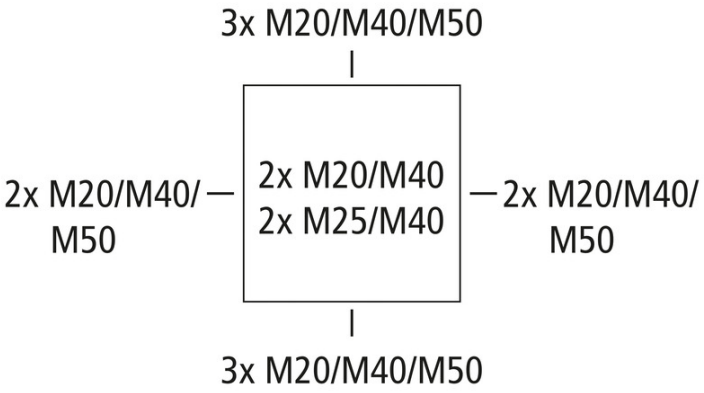
23043201 - AST M32 - Attachment bushes

23044001 - AST M40 - Attachment bushes

89603101 - MABF 150-2 - Mast/pipe fixing set

89604001 - MABF 215-1 - Mast/pipe fixing set

Cable gland


3x M20/M40/M50
2x M20/M40/
M50
2x M20/M40
2x M25/M40
2x M20/M40/
M50
3x M20/M40/M50