date: 23/10/2026

ORION POST 260

Part number 3106842

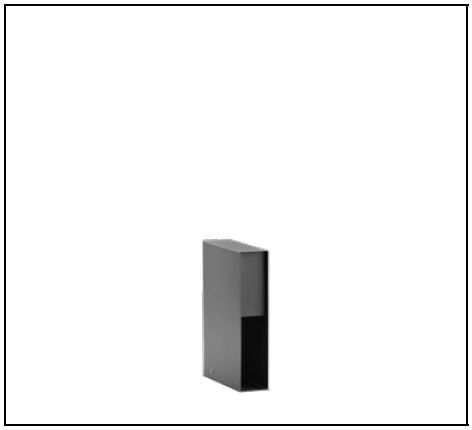

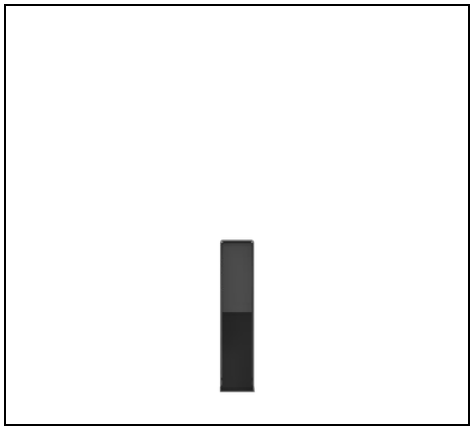

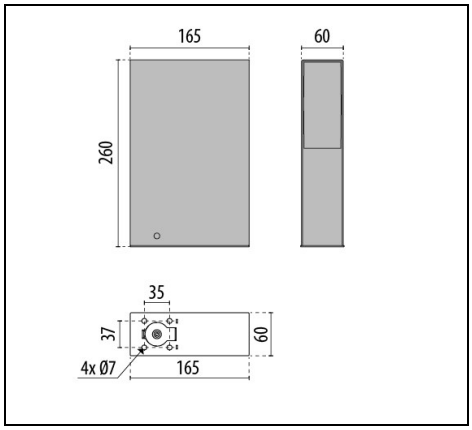

IP 65 | CLASS I | QUICK

Description

Landscaping LED bollard, comprising:

- Die-cast aluminium housing, polyester powder coat finish ISO 9227/12944 - ISO 9223 (C5)
- Extra-clear, toughened, flat glass diffuser, silk-screened on the inside
- Aluminium reflector
- Anti-ageing custom moulded silicone sealing gasket(s)
- Painted stainless steel sheet metal structure (ORION POST 260)
- Driver On Board 220-240V 50/60Hz LED module protected against surges up to 1 kV
- Base plate included
- IP-rated external socket-plug fast connector (QUICK), complete with factory pre-wired cable

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com

Product data

ETIM Group:	EG000027	**ETIM Class:**	EC000301

General information

Lampholder:	LED	**Light source:**	LED
Lightsource lumen output [lm]:	742	**Luminaire lumen output [lm]:**	101.93
Luminaire wattage [W]:	5 W	**Luminous efficacy [lm/W]:**	20
CRI:	80	**Colour temperature [K]:**	4000
Colour / Finishing:	AN-96 / Anthracite gray / Textured	**IP degree of protection:**	IP65
Impact resistance / impact energy:	IK08 5J xx5	**Protection class:**	I
Optic:	A/M - Asymmetric Medium	**Net weight [kg]:**	2.289
Overall length [mm]:	60	**Overall width [mm]:**	165
Overall height [mm]:	260		

Mechanical features

Shape:	Rectangular	**Housing material:**	Aluminium
Diffuser material:	Glass		

Electrical features

Voltage type:	AC	**Input voltage [V AC]:**	220/240
Input frequency [Hz]:	50/60	**Power factor / COS Φ:**	>0.9
Inrush current [A/µs]:	3 / 136	**C10 1.5 mm²:**	133
C16 2.5 mm²:	213	**B10 1.5 mm²:**	83
B16 2.5 mm²:	133		

Installation

Application area:	Outdoor lighting	**Mounting type:**	Garden post
Min. ambient temperature [°C]:	-20	**Max. ambient temperature [°C]:**	40

Light features

MacAdam:	3	**Lumen maintenance:**	L80B10@66800h
Distribution of light emission:	Direct	**Luminous Intensity Class:**	G*1

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com

Photometric data

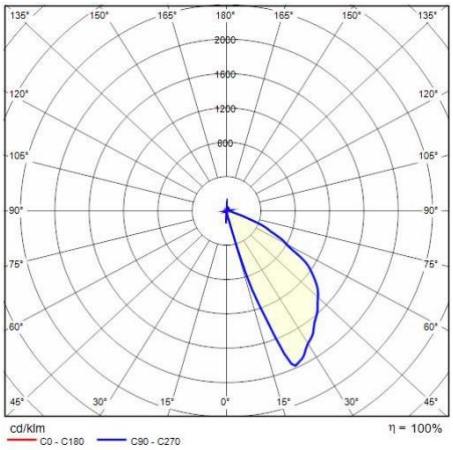

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com