date: 17/10/2026

DROP 22

Part number 004960

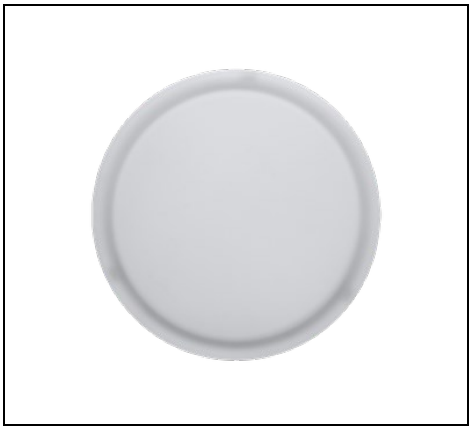

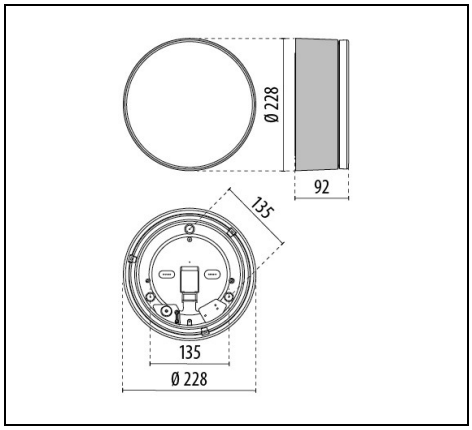

IP 55 | CLASS II

Description

Wall and ceiling mounted luminaire for indoor and outdoor, comprising:
- Housing manufactured from technopolymer
- Pressed glass diffuser, internally coated, and matt finished outside
- Class II
- Aluminium reflector
- Technopolymer silicone sealing gasket
- Side entry for 20 mm conduits (drill out holes in housing arrangement)
- Chromed steel spring locks to secure the diffuser to housing
- Self-adhesive pictograms available as accessory (ordered separately)
- Design by ROBERTO FIORATO
- Design by ROBERTO FIORATO

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com

Product data

ETIM Group:	EG000027	**ETIM Class:**	EC002892

General information

Lampholder:	E27	**Light source:**	Incandescent lamps
Luminaire wattage [W]:	1x60 W	**Colour / Finishing:**	AN-96 / Anthracite gray / Textured
IP degree of protection:	IP55	**Impact resistance / impact energy:**	IK06 1J xx3
Protection class:	II	**Optic:**	S/EW - Symmetric Extra-Wide
Net weight [kg]:	1.582	**Overall diameter [mm]:**	228
Overall width [mm]:	95		

Mechanical features

Shape:	Round 150 ≤ x ≤ 300 mm	**Housing material:**	Plastic
Diffuser material:	Glass	**Glow wire test [°C]:**	750 °C

Installation

Application area:	Outdoor lighting	**Mounting type:**	Bulkhead
Min. ambient temperature [°C]:	-30	**Max. ambient temperature [°C]:**	25

Light features

Distribution of light emission:	Direct

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com

Photometric data

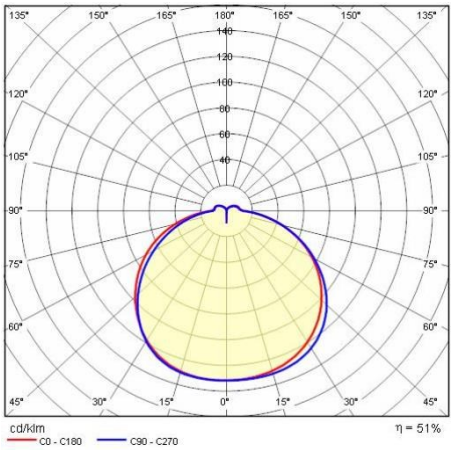

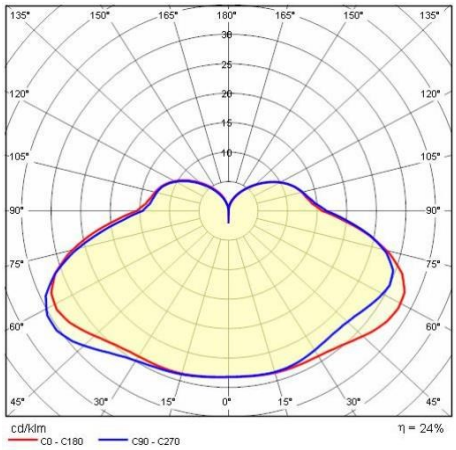

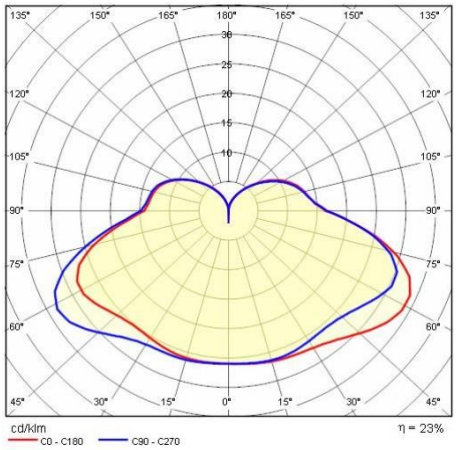

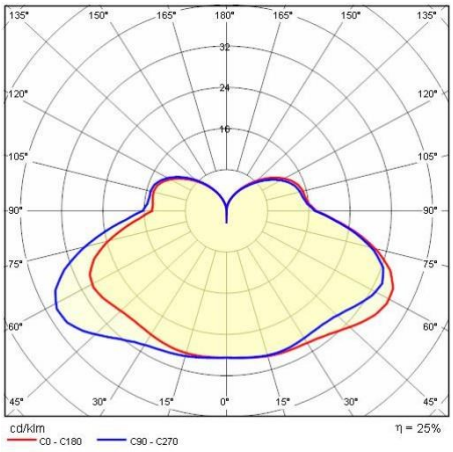

Optional accessories

DROP 22

008342

Arrow

GN1 / Green

008343

Extinguisher

RD1 / Red

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com

008344

Man

BL1 / Blue

008345

Woman

BL1 / Blue

008346

Disabled

BL1 / Blue

008347

Toilet

BL1 / Blue

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com