

HDC 64D SZO 2PG29G**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**IP65**

The special die-cast alloy and the multi-layered surface sealing provide complete protection for the HDC housings.

The cleverly designed interlock system is manufactured from stainless steel. This guarantees a long lifespan with high resistance to corrosion and impact.

The housing interlock system provides integrated safety. Our unique, patented spring system provides the housing interlock with a secure grip and prevents accidental opening.

The laser marking allows for easy and quick identification. Each housing is permanently labelled with a laser marking so that each product can be quickly designated and positioned.

Weidmüller RockStar® IP 65 / NEMA Type 4X housings - your first choice for industrial housings with IP 65 protection.

General ordering data

Version	HDC enclosures, Size: 8, Protection degree: IP65 (in plugged condition), Base housing, Central locking at the top, high, Size of cable entries: PG 29
Order No.	1968370000
Type	HDC 64D SZO 2PG29G
GTIN (EAN)	4032248689385
Qty.	1 pc(s).

HDC 64D SZO 2PG29G

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Height	84 mm	Height (inches)	3.307 inch
Width	59 mm	Width (inches)	2.323 inch
Mounting dimension - height	45 mm	Mounting dimension - width	132 mm
Net weight	424 g		

Temperatures

Limit temperature	-40 °C ... 125 °C
-------------------	-------------------

Dimensions

Cable entry	w. thread	Height of base B1	5 mm
Height of housing B	80 mm	Hole pitch length A2	132 mm
Total length housing	120 mm	Width base C1	58 mm
Width housing C	43 mm		

General data

EMC housings	No	Housing main material	diecast aluminium
Material of locking element	Stainless steel, rust-proof	Protection degree	IP65 (in plugged condition)
Surface finish	Powder coating		

Version

BG	8	Cable entry	w. thread
Clamp version	Central-locking clamp	Colour (RAL)	RAL 7035
Design	high	Design of housing	Base housing
Design of locking system	Central locking at the top	Internal thread	PG 29
Number of cable entry on top	0	Number of cable entry sideways	2
Sealing	NBR	Size	8
Size of cable entries	PG 29	Suitable for ModuPlug®	Yes
Top part/bottom part/lid	lower part	Type	Base housing

Classifications

ETIM 6.0	EC000437	ETIM 7.0	EC000437
ETIM 8.0	EC000437	ETIM 9.0	EC000437
ETIM 10.0	EC000437	ECLASS 9.0	27-44-02-02
ECLASS 9.1	27-44-02-02	ECLASS 10.0	27-44-02-02
ECLASS 11.0	27-44-02-02	ECLASS 12.0	27-44-02-02
ECLASS 13.0	27-44-02-02	ECLASS 14.0	27-44-02-02
ECLASS 15.0	27-44-02-02		

Substance	Acetone
Chemical resistance	Conditionally resistant
Substance	Drilling oil
Chemical resistance	Resistant
Substance	Diesel
Chemical resistance	Resistant
Substance	Ethyl alcohol

HDC 64D SZO 2PG29G

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Chemical resistance	Resistant
Substance	Transmission oil
Chemical resistance	Resistant
Substance	Hydraulic oil
Chemical resistance	Resistant
Substance	Coolant
Chemical resistance	Resistant
Substance	Petroleum benzine
Chemical resistance	Resistant
Substance	Sweat
Chemical resistance	Resistant
Substance	Premium gasoline
Chemical resistance	Conditionally resistant
Substance	Water
Chemical resistance	Resistant
Substance	UV
Chemical resistance	Unstable
Substance	Ozone
Chemical resistance	Unstable

Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%
Chemical resistance	de.myview.objectmodel.impl.BlockImpl@2135a144 de.myview.objectmodel.impl.BlockImpl@17a9bd91 de.myview.objectmodel.impl.BlockImpl@16fa803a de.myview.objectmodel.impl.BlockImpl@13b8f1d6 de.myview.objectmodel.impl.BlockImpl@1f8b5d64 de.myview.objectmodel.impl.BlockImpl@45943e31 de.myview.objectmodel.impl.BlockImpl@72d8de9 de.myview.objectmodel.impl.BlockImpl@534fea9b de.myview.objectmodel.impl.BlockImpl@16eaedeb de.myview.objectmodel.impl.BlockImpl@72eb3cb1 de.myview.objectmodel.impl.BlockImpl@1942b5c0 de.myview.objectmodel.impl.BlockImpl@35f58f41 de.myview.objectmodel.impl.BlockImpl@7431b9a1

Approvals

Approvals



Approvals MAMID	https://mdcop.weidmueller.com/mediadelivery/rendition/900_319222/-T1z1mm-S800/ https://mdcop.weidmueller.com/mediadelivery/rendition/900_319230/-T1z1mm-S800/
ROHS	Conform
UL File Number Search	UL Website
Certificate No. (cURus)	E92202

HDC 64D SZO 2PG29G

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Downloads

Engineering Data	CAD data – STEP
Product Change Notification	20220214 Technical change to HDC housings 20220214 Technische Änderung bei HDC-Gehäusen
Catalogues	Catalogues in PDF-format
Brochures	FL FIELDWIRING EN FL FIELDWIRING EN

HDC 64D SZO 2PG29G

Weidmüller Interface GmbH & Co. KG


Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Drawings

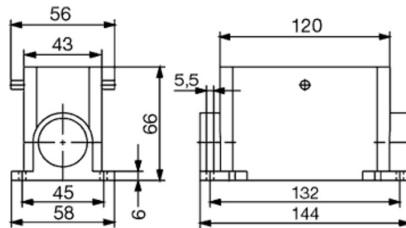

HDC 64D SZO 2PG29G

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

Housing, cable entry sideways



The special die-cast alloy and the multi-layered surface sealing provide complete protection for the HDC housings.

The cleverly designed interlock system is manufactured from stainless steel. This guarantees a long lifespan with high resistance to corrosion and impact.

The housing interlock system provides integrated safety. Our unique, patented spring system provides the housing interlock with a secure grip and prevents accidental opening.

The laser marking allows for easy and quick identification. Each housing is permanently labelled with a laser marking so that each product can be quickly designated and positioned.

Weidmüller RockStar® IP 65 / NEMA Type 4X housings - your first choice for industrial housings with IP 65 protection.

General ordering data

Type	HDC 64D TSZO 1M40G	Version
Order No.	1904690000	HDC enclosures, Size: 8, Protection degree: IP65 (in plugged condition), Cable entry from side, Plug housing, Central locking at the top, high, Size of cable entries: M 40
GTIN (EAN)	4032248585281	
Qty.	1 pc(s).	
Type	HDC 64D TSZO 1PG21G	Version
Order No.	1663370000	HDC enclosures, Size: 8, Protection degree: IP65 (in plugged condition), Cable entry from side, Plug housing, Central locking at the top, high, Size of cable entries: PG 21
GTIN (EAN)	4008190419899	
Qty.	1 pc(s).	
Type	HDC 64D TSZO 1PG29G	Version
Order No.	1663390000	HDC enclosures, Size: 8, Protection degree: IP65 (in plugged condition), Cable entry from side, Plug housing, Central locking at the top, high, Size of cable entries: PG 29
GTIN (EAN)	4008190419912	
Qty.	1 pc(s).	