


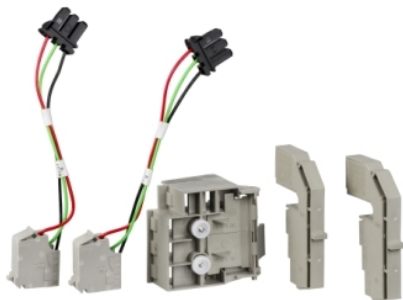

Hoofd

Product or component type	Hulpcontact
Bereik compatibiliteit	Compact Compact NS630b...1600
Samenstelling signaleringscontacten	1 NO/NC

Complementair

Type hulpcontacten	Standaard
Werking hulpcontacten	Vroeg afvallend
Mounting mode	Clip-on
lth conventionele thermische stroom in vrije lucht	6 A
Minimale belasting	100 mA bij 24 V DC

Verpakkingseenheid

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5,0 cm
Package 1 Width	11,0 cm
Package 1 Length	18,0 cm
Package 1 Weight	94,0 g

contractuele waarborg

Garantie	18 months
----------	-----------