

HDC 48A SLU 1PG29G**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**IP65**

The special die-cast alloy and the multi-layered surface sealing provide complete protection for the HDC housings.

The cleverly designed interlock system is manufactured from stainless steel. This guarantees a long lifespan with high resistance to corrosion and impact.

The housing interlock system provides integrated safety. Our unique, patented spring system provides the housing interlock with a secure grip and prevents accidental opening.

The laser marking allows for easy and quick identification. Each housing is permanently labelled with a laser marking so that each product can be quickly designated and positioned.

Weidmüller RockStar® IP 65 / NEMA Type 4X housings - your first choice for industrial housings with IP 65 protection.

General ordering data

Version	HDC enclosures, Size: 9, Protection degree: IP65 (in plugged condition), Base housing, End-locking clamp, lower side, Standard, Size of cable entries: PG 29
Order No.	1666770000
Type	HDC 48A SLU 1PG29G
GTIN (EAN)	4008190423889
Qty.	1 pc(s).

HDC 48A SLU 1PG29G**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Dimensions and weights**

Height	79 mm	Height (inches)	3.11 inch
Width	121.5 mm	Width (inches)	4.783 inch
Mounting dimension - height	67 mm	Mounting dimension - width	112 mm
Net weight	639 g		

Temperatures

Limit temperature	-40 °C ... 125 °C
-------------------	-------------------

Dimensions

Cable entry	w. thread	Height of base B1	5 mm
Height of housing B	79 mm	Hole pitch length A2	112 mm
Total length housing	94 mm	Width base C1	92.5 mm
Width housing C	82.5 mm		

General data

EMC housings	No	Housing main material	diecast aluminium
Material of locking element	Stainless steel, rust-proof	Protection degree	IP65 (in plugged condition)
Surface finish	Powder coating	Tightening torque	2 Nm

Version

BG	9	Cable entry	w. thread
Clamp version	End-locking clamp	Colour (RAL)	RAL 7035
Design	Standard	Design of housing	Base housing
Design of locking system	End-locking clamp, lower side	Internal thread	PG 29
Number of cable entry on top	0	Number of cable entry sideways	1
Sealing	NBR	Size	9
Size of cable entries	PG 29	Suitable for ModuPlug®	No
Tightening torque	2 Nm	Top part/bottom part/lid	lower part
Type	Base housing		

Classifications

ETIM 6.0	EC000437	ETIM 7.0	EC000437
ETIM 8.0	EC000437	ETIM 9.0	EC000437
ETIM 10.0	EC000437	ECLASS 9.0	27-44-02-02
ECLASS 9.1	27-44-02-02	ECLASS 10.0	27-44-02-02
ECLASS 11.0	27-44-02-02	ECLASS 12.0	27-44-02-02
ECLASS 13.0	27-44-02-02	ECLASS 14.0	27-44-02-02
ECLASS 15.0	27-44-02-02		

Substance	Acetone
Chemical resistance	Conditionally resistant
Substance	Drilling oil
Chemical resistance	Resistant
Substance	Diesel
Chemical resistance	Resistant

HDC 48A SLU 1PG29G

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Substance	Ethyl alcohol
Chemical resistance	Resistant
Substance	Transmission oil
Chemical resistance	Resistant
Substance	Hydraulic oil
Chemical resistance	Resistant
Substance	Coolant
Chemical resistance	Resistant
Substance	Petroleum benzine
Chemical resistance	Resistant
Substance	Sweat
Chemical resistance	Resistant
Substance	Premium gasoline
Chemical resistance	Conditionally resistant
Substance	Water
Chemical resistance	Resistant
Substance	UV
Chemical resistance	Unstable
Substance	Ozone
Chemical resistance	Unstable

Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	Potassium perfluorobutane sulfonate 29420-49-3
SCIP	e98b2b24-ba23-41bf-8d19-Odda3647412f
Chemical resistance	de.myview.objectmodel.impl.BlockImpl@78f8470e de.myview.objectmodel.impl.BlockImpl@4203987c de.myview.objectmodel.impl.BlockImpl@2e82fa71 de.myview.objectmodel.impl.BlockImpl@3b5c5b39 de.myview.objectmodel.impl.BlockImpl@126ab6b de.myview.objectmodel.impl.BlockImpl@5f38034b de.myview.objectmodel.impl.BlockImpl@66d02baf de.myview.objectmodel.impl.BlockImpl@3f8c21df de.myview.objectmodel.impl.BlockImpl@b45a8b6 de.myview.objectmodel.impl.BlockImpl@14f8c0ce de.myview.objectmodel.impl.BlockImpl@73121cad de.myview.objectmodel.impl.BlockImpl@2dce49c9 de.myview.objectmodel.impl.BlockImpl@b6854de

Approvals

Approvals



Approvals MAMID	https://mdcop.weidmueller.com/mediadelivery/rendition/900_319222/-T1z1mm-S800/ https://mdcop.weidmueller.com/mediadelivery/rendition/900_319230/-T1z1mm-S800/
ROHS	Conform
UL File Number Search	UL Website
Certificate No. (cURus)	E92202

Creation date May 11, 2025 6:57:12 PM CEST

Catalogue status 26.04.2025 / We reserve the right to make technical changes.

HDC 48A SLU 1PG29G

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Downloads

Approval/Certificate/Document of Conformity

[Manufacturer's declaration](#)

Engineering Data

[CAD data – STEP](#)

Product Change Notification

[20220214 Technical change to HDC housings](#)

[20220214 Technische Änderung bei HDC-Gehäusen](#)

Technical Documentation

[1666770000 HDC 48A SLU 1PG29G STP Blatt 1.pdf](#)

Catalogues

[Catalogues in PDF-format](#)

Brochures

[FL FIELDWIRING EN](#)


[FL FIELDWIRING EN](#)

HDC 48A SLU 1PG29G

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

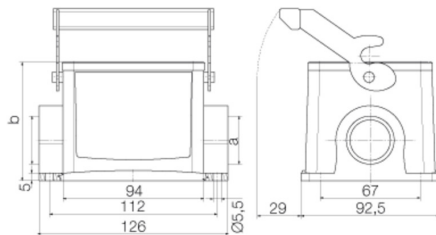

HDC 48A SLU 1PG29G

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

Hood, Cable Entry sideways



The special die-cast alloy and the multi-layered surface sealing provide complete protection for the HDC housings.

The cleverly designed interlock system is manufactured from stainless steel. This guarantees a long lifespan with high resistance to corrosion and impact.

The housing interlock system provides integrated safety. Our unique, patented spring system provides the housing interlock with a secure grip and prevents accidental opening.

The laser marking allows for easy and quick identification. Each housing is permanently labelled with a laser marking so that each product can be quickly designated and positioned.

Weidmüller RockStar® IP 65 / NEMA Type 4X housings - your first choice for industrial housings with IP 65 protection.

General ordering data

Type	HDC 48A TSLU 1PG29G	Version
Order No.	1666710000	HDC enclosures, Size: 9, Protection degree: IP65 (in plugged condition), Cable entry from side, Plug housing, End-locking clamp,
GTIN (EAN)	4008190448127	lower side, Standard, Size of cable entries: PG 29
Qty.	1 pc(s).	
Type	HDC 48A TSLU 1M32G	Version
Order No.	1788550000	HDC enclosures, Size: 9, Protection degree: IP65 (in plugged condition), Cable entry from side, Plug housing, End-locking clamp,
GTIN (EAN)	4032248206087	lower side, Standard, Size of cable entries: M 32
Qty.	1 pc(s).	

Hood, Cable Entry at top



The special die-cast alloy and the multi-layered surface sealing provide complete protection for the HDC housings.

The cleverly designed interlock system is manufactured from stainless steel. This guarantees a long lifespan with high resistance to corrosion and impact.

The housing interlock system provides integrated safety. Our unique, patented spring system provides the housing interlock with a secure grip and prevents accidental opening.

The laser marking allows for easy and quick identification. Each housing is permanently labelled with a laser marking so that each product can be quickly designated and positioned.

Weidmüller RockStar® IP 65 / NEMA Type 4X housings - your first choice for industrial housings with IP 65 protection.

General ordering data

Type	HDC 48A TOLU 1PG29G	Version
Order No.	1666730000	HDC enclosures, Size: 9, Protection degree: IP65 (in plugged condition), Cable entry from top, Plug housing, End-locking clamp,
GTIN (EAN)	4008190423841	lower side, Standard, Size of cable entries: PG 29
Qty.	1 pc(s).	

HDC 48A SLU 1PG29G**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Accessories**

Type	HDC 48A TOLU 1M32G	Version
Order No.	1788560000	HDC enclosures, Size: 9, Protection degree: IP65 (in plugged
GTIN (EAN)	4032248206094	condition), Cable entry from top, Plug housing, End-locking clamp,
Qty.	1 pc(s).	lower side, Standard, Size of cable entries: M 32