
Large conduit box

P 71 GRO

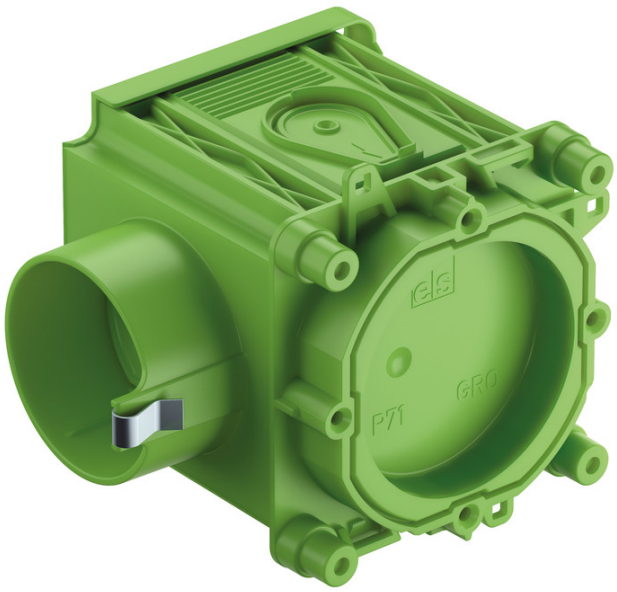

P 71 GRO

Large conduit box

Productnumber: 98407501
Dimensions: 71 x 71 x 76,5 mm

Large conduit box , especially for horizontal factory finishing, 1-part, diameter 60 mm Ø, 4 screw bosses with a 60 mm screw spacing, combinable, suitable for opposing formwork, combinable with a standard spacing of 71 mm, protection class IP30, rated insulation voltage: 400V AC, certified by VDE (DIN EN 60670-1/-22 (VDE 0606-1/-22)), Halogen free

with enlarged terminal compartment, for 50mm HM-UNI magnetic clamp (97929901), magnet installation, conduit adapter and additional conduit adapter with Easy-Cut-Membran, sealing range M32 - M40, support spar compatible

Created at 04.06.2026. All statements without guarantee. We reserve the right to make improvements to technical progress.
Günther Spelsberg GmbH + Co. KG
Im Gewerbepark 1 · D-58579 Schalksmühle · Telefon: +49 (0) 23 55 / 892-0 · Telefax: +49 (0) 23 55 / 892-299

Technical Data

electrical characteristics

Rated insulation voltage AC:	400 V
Type of protection:	IP30
Suitable for:	Concrete construction
UL Type Rating:	not specified

Dimensions

Width:	71 mm
Length:	71 mm
Height:	76.5 mm
Inner height:	72.9 mm
Weight:	0.061 kg

Material characteristics

Halogen free:	yes
Flammability class according with UL94:	HB
Glow-wire flammability:	650 °C (EN 60695-2-11)

mechanical properties

Type of fastening:	magnet installation

Ambient conditions

max. relative humidity 40°C:	50 %
Min. ambient temperature:	-25 °C
Max. ambient temperature:	40 °C
24h ambient temperature:	35 °C

Sales Information

EAN:	4013902597505
ETIM Class:	EC002601
Custom tariff number:	39269097

Sales Information

Minimum order quantity:	1

Material

Base unit material:	Plastic
Cover material:	Polypropylene

Certificates

Test mark:	VDE (DIN EN 60670-1/-22 (VDE 0606-1/-22))

Accessories

97929901 - HM-UNI - IBT Accessories

98403201 - RA 32 - Conduit adapter

98404001 - RA 40 - Conduit adapter

Cable gland

Integrierte Rohreinführungen:
1 x M40

EasyCut-Membrane:
3 x bis M40