

Data sheet

Patch cord 40G AWG 26 3.0 m yellow

Page 1/7

P/N


13084H3077-E

EAN 4251394618104


2026/09/10

Version: H

Illustrations

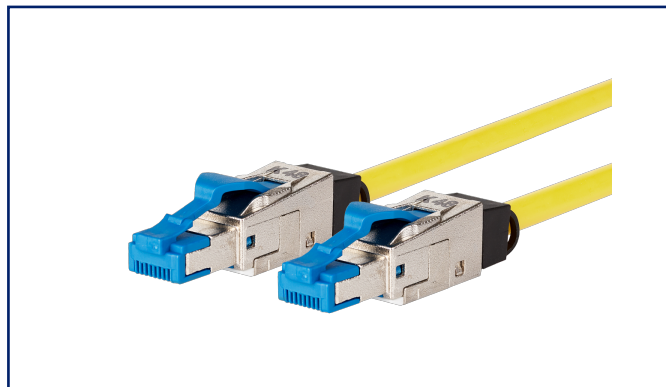

Dimensional drawing

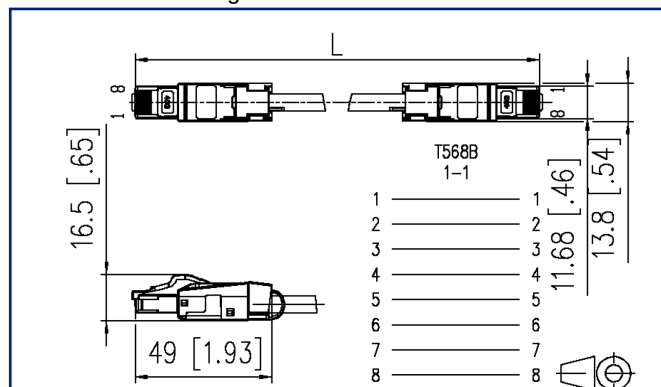

See enlarged drawings at the end of document

Product specification

- fully shielded and pair screened 40G patch cord
- cable type: S/FTP 4x2xAWG 26/7 PIMF
- cable sheath: LSHF (LSOH), halogen free
- two robust, shielded and multi-port capable RJ45 connectors, 1:1 assignment
- protected locking hook
- compliance with class I according to ISO/IEC 11801, DIN EN 50173-1
- transmission characteristics Cat.8.1 according to ISO/IEC 11801 (up to 2000 MHz)
- 40GBASE-T suitable for 40 Gbit Ethernet (IEEE 802.3bq)
- suitable for Remote Powering (PoE, PoE plus, UPoE and 4PPoE) and HDBaseT
- standard variants: 0.5 m, 1.0 m, 1.5 m, 2.0 m, 3.0 m, 5.0 m



Data sheet

Page 2/7

Patch cord 40G AWG 26 3.0 m yellow

P/N

13084H3077-E

EAN 4251394618104

2026/09/10

Version: H

Technical Data

General Data

Fields of application	structured building cabling office areas Distributed building services data center Tertiary
Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E2
Design	patch cord
Shielding	shielded
Transmission technology	Copper
Cable Type	S/FTP
Number of twisting elements	4
Twisting element	Pair
Wiring	1 - 1
Color	yellow
Dimensions	
Dimension - Interface 1 (L x W x H)	49 mm x 13.8 mm x 16.5 mm
Dimension - Interface 1 (L x W x H)	1.929 in. x 0.543 in. x 0.65 in.
Dimension - Interface 2 (L x W x H)	49 mm x 13.8 mm x 16.5 mm
Dimension - Interface 2 (L x W x H)	1.929 in. x 0.543 in. x 0.65 in.
Cable length (m)	3 m
Cable length (ft)	9.84 ft

Transmission characteristics

Category (ISO)	8.1
Class (ISO/IEC)	I
Remote Powering	yes
PoE	IEEE 802.3af
PoE plus	IEEE 802.3at
UPoE	yes
4PPoE	IEEE 802.3bt
HDBaseT	yes



Data sheet

Page 3/7

Patch cord 40G AWG 26 3.0 m yellow

P/N

13084H3077-E

EAN 4251394618104

2026/09/10

Version: H

Technical Data

Transmission characteristics

Transmission rate up to 100 MBit (Fast Ethernet)	IEEE 802.3u
Transmission rate up to 1 GBit (Fast Ethernet)	IEEE 802.3ab
Transmission rate up to 10 GBit	IEEE 802.3an
Transmission rate up to 25 GBit (Fast Ethernet)	IEEE 802.3bq
Transmission rate up to 40 GBit (Fast Ethernet)	IEEE 802.3bq

Connections/interfaces

Connector technology interface 1	RJ45 plug
Connector technology interface 2	RJ45 plug
Number of ports interface 1	1
Number of ports interface 2	1
Number of equipped ports interface 1	1
Number of ports interface 2 equipped	1
Number of positions/contacts interface 1	8P/8C
Number of positions/contacts interface 2	8P/8C
Termination data, stranded wire (min. - max.)	
Conductor cross section, stranded wire	AWG 26/7
Conductor cross section, stranded wire	0.141 mm ²
Conductor diameter, stranded wire (bare copper)	0.483 mm
Conductor diameter, stranded wire (bare copper)	0.019 in.
Cable sheath diameter (min. - max.)	
Cable sheath diameter	6.0 mm

Electrical characteristics

Current carrying capacity	max. 1 A
Rated voltage	max. 60 V DC
Contact resistance	max. 20 mOhm
Through resistance	max. 200 mOhm
Insulation resistance	min. 100 MOhm
Transfer impedance 1 MHz	max. 25 mOhm/m
Transfer impedance 10 MHz	max. 25 mOhm/m
Transfer impedance 30 MHz	max. 30 mOhm/m
Resistance unbalance	max. 2 %



Data sheet

Page 4/7

Patch cord 40G AWG 26 3.0 m yellow

P/N

13084H3077-E

EAN 4251394618104

2026/09/10

Version: H

Technical Data

Electrical characteristics

Capacitance at 800 Hz	Nom. 43 nF/km
Capacitance unbalance pair to ground	max. 1200 pF/km
Delay skew	max. 20 ns/100 m
Dielectric strength conductor-conductor (primarily)	max. 1000 V DC
Dielectric strength conductor-conductor (secondary)	max. 1000 V DC

Mechanical data

Tensile force	100 N
Fire load	296 MJ/km
Position/mounting of latch standard installation position	top
Bending radius without load	max. 25.2 mm
Bending radius with load	max. 50.4 mm

Materials and material properties

Cable

Material - Cable jacket	LSHF (LSOH)
Flame retardancy	yes, according to IEC 60332-1-2:2004 AMD1:2015

Interface 1

Material - Plug housing interface 1	PC (polycarbonate)
Material - Contact interface 1	CuSn
Material - Contact finish interface 1	Au (gold)
Material - Contact carriers interface 1	Plastics
Material - Shield interface 1	CuSn
Material - Shield finish interface 1	Sn

Interface 2

Material - Plug housing interface 2	PC (polycarbonate)
Material - Contact interface 2	CuSn
Material - Contact finish interface 2	Au (gold)
Material - Contact carriers interface 2	Plastics
Material - Shield interface 2	CuSn
Material - Shield finish interface 2	Sn

RoHS	compliant
------	-----------



Data sheet

Page 5/7

Patch cord 40G AWG 26 3.0 m yellow

P/N

13084H3077-E

EAN 4251394618104

2026/09/10

Version: H

Technical Data

Environmental conditions

Temperature (min. - max.)

Temperature - Storage °C	-20 °C - 60 °C
Temperature - Storage °F	-4 °F - 140 °F
Temperature - Operating °C	-20 °C - 60 °C
Temperature - Operating °F	-4 °F - 140 °F
Temperature - Installation °C	50 °C
Temperature - Installation °F	32 °F - 122 °F

Standards/Regulations

Generic cabling systems

General requirements	ISO/IEC 11808 DIN EN 50173-1 ANSI/TIA-568.2-D
Office buildings	ISO/IEC 11801-9 DIN EN 50173-2 ANSI/TIA-568.2-D
Living units	ISO/IEC 11801-4 DIN EN 50173-4 ANSI/TIA-570-D
Data centers	ISO/IEC 11801-5 DIN EN 50173-5 ANSI/TIA-942-B

Connectors for electronic equipment

Free and fixed connectors	IEC 60603-7-51
Specification for the testing of balanced and coaxial information technology cabling	
Cords as specified in ISO/IEC 11801 and related standards	IEC 61935-2

Classifications

ETIM 7.0	EC001262
ETIM 8.0	EC001262
ETIM 9.0	EC001262
ETIM 10.0	EC001262

Packing details

Type of packaging	1 pc(s) / plastic bag
-------------------	-----------------------



Data sheet

Page 6/7

Patch cord 40G AWG 26 3.0 m yellow

P/N

13084H3077-E

EAN 4251394618104

2026/09/10

Version: H

Technical Data

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way.



Data sheet

Page 7/7

Patch cord 40G AWG 26 3.0 m yellow

P/N

13084H3077-E

EAN 4251394618104

2026/09/10

Version: H

Illustrations

Dimensional drawing

