

**HDC-CM-4BZF AG****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com



The CM4 module features the established tension clamp connection. The contact point can be opened with a screwdriver. The wire is then inserted and the contact chamber is then closed when the screwdriver is taken out. A secure connection can be quickly established without the need for any special tools.

A removal tool is available for removing the modules.

**General ordering data**

Version	Heavy-duty connectors, HDC insert, ConCept module
Order No.	<a href="#">1730130000</a>
Type	HDC-CM-4BZF AG
GTIN (EAN)	4008190384685
Qty.	10 items

## HDC-CM-4BZF AG

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Approvals

Approvals



ROHS Conform

UL File Number Search [UL Website](#)

Certificate No. (UR) E92202

## Dimensions and weights

Depth	34 mm	Depth (inches)	1.3386 inch
Height	40.4 mm	Height (inches)	1.5905 inch
Width	11.4 mm	Width (inches)	0.4488 inch
Length	34 mm	Length (inches)	1.3386 inch
Net weight	15.14 g		

## Environmental Product Compliance

RoHS Compliance Status Compliant with exemption

RoHS Exemption (if applicable/known) 6c

REACH SVHC Lead 7439-92-1, Potassium perfluorobutane sulfonate 29420-49-3

SCIP b67daa31-7dca-434d-8290-da7fb52f83a2

## ConCept Pneumatic module

UL 94 flammability rating V-0 Colour beige

## Dimensions

Width	11.4 mm	Total length base	34 mm
Height of socket	40.4 mm		

## General data

Number of poles	4	Type of connection	Tension-clamp connection
UL 94 flammability rating	V-0	Volume resistance	1.5 mΩ
Colour	beige	Insulation resistance	1012 Ω
Plugging cycles	≥ 500	Type	Female
Surge voltage category	III	Pollution severity	3
Basic material	Polycarbonate, glass fibre reinforced	Series	ConCept module
Rated voltage (DIN EN 61984)	400 V	Rated impulse voltage (DIN EN 61984)	6 kV
Rated current (DIN EN 61984)	14 A	Free from halogens	false
Low smoke acc. DIN EN 45545-2	Yes		

## Connection data PE

Connection type PE Screw connection via module frame

## Version

Wire connection cross section AWG, max.	AWG 14	Stripping length, rated connection	10 mm
Type of connection	Tension-clamp connection	Volume resistance	1.5 mΩ

Creation date 25.02.2026 08:47:48 MEZ

Catalogue status / Drawings

**HDC-CM-4BZF AG**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Technical data**

Wire connection cross section AWG, min.	AWG 20	Conductor cross-section, max.	2.5 mm <sup>2</sup>
Conductor cross-section, min.	0.5 mm <sup>2</sup>	Basic material	Polycarbonate, glass fibre reinforced

**Classifications**


ETIM 8.0	EC000438	ETIM 9.0	EC000438
ETIM 10.0	EC000438	ECLASS 14.0	27-44-02-17
ECLASS 15.0	27-44-02-17		

**HDC-CM-4BZF AG**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

**Drawings**

[www.weidmueller.com](http://www.weidmueller.com)

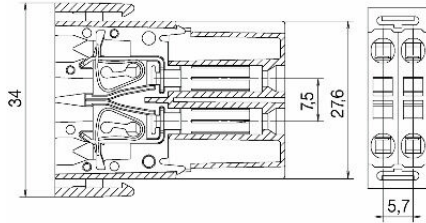

## HDC-CM-4BZF AG

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Accessories

## Modul removal tool



Weidmüller offers a variety of crimping tools, no-contact tools, and fibre optic tools.

## General ordering data

Type	HDC-DW-MOD	Version	
Order No.	<a href="#">1688200000</a>	Tool miscellaneous, Contact Removal Tool	
GTIN (EAN)	4008190857189		
Qty.	1 ST		

## Slotted screwdriver



Slotted screwdriver with rounded blade SD DIN 5265, ISO 2380/2, output to DIN 5264, ISO 2380/1. ChromTop tip, SoftFinish grip

## General ordering data

Type	SDS 0.6X3.5X100	Version	
Order No.	<a href="#">9008330000</a>	Screwdriver, Screwdriver	
GTIN (EAN)	4032248056286		
Qty.	1 ST		